
kwcoco Documentation

Release 0.7.2

Jon Crall

Oct 04, 2023

PACKAGE LAYOUT

| | |
|--|----------|
| 1 CocoDataset API | 5 |
| 1.1 CocoDataset classmethods (via MixinCocoExtras) | 5 |
| 1.2 CocoDataset classmethods (via CocoDataset) | 5 |
| 1.3 CocoDataset slots | 5 |
| 1.4 CocoDataset properties | 6 |
| 1.5 CocoDataset methods (via MixinCocoAddRemove) | 6 |
| 1.6 CocoDataset methods (via MixinCocoObjects) | 7 |
| 1.7 CocoDataset methods (via MixinCocoStats) | 7 |
| 1.8 CocoDataset methods (via MixinCocoAccessors) | 7 |
| 1.9 CocoDataset methods (via CocoDataset) | 8 |
| 1.10 CocoDataset methods (via MixinCocoExtras) | 8 |
| 1.11 CocoDataset methods (via MixinCocoDraw) | 8 |
| 2 kwcoco | 9 |
| 2.1 kwcoco package | 9 |
| 2.1.1 Subpackages | 9 |
| 2.1.1.1 kwcoco.cli package | 9 |
| 2.1.1.1.1 Submodules | 9 |
| 2.1.1.1.1.1 kwcoco.cli.__main__ module | 9 |
| 2.1.1.1.1.2 kwcoco.cli.coco_conform module | 9 |
| 2.1.1.1.1.3 kwcoco.cli.coco_eval module | 10 |
| 2.1.1.1.1.4 kwcoco.cli.coco_grab module | 12 |
| 2.1.1.1.1.5 kwcoco.cli.coco_modify_categories module | 13 |
| 2.1.1.1.1.6 kwcoco.cli.coco_move module | 14 |
| 2.1.1.1.1.7 kwcoco.cli.coco_reroot module | 15 |
| 2.1.1.1.1.8 kwcoco.cli.coco_show module | 16 |
| 2.1.1.1.1.9 kwcoco.cli.coco_split module | 17 |
| 2.1.1.1.1.10 kwcoco.cli.coco_stats module | 18 |
| 2.1.1.1.1.11 kwcoco.cli.coco_subset module | 19 |
| 2.1.1.1.1.12 kwcoco.cli.coco_toydata module | 21 |
| 2.1.1.1.1.13 kwcoco.cli.coco_union module | 22 |
| 2.1.1.1.1.14 kwcoco.cli.coco_validate module | 23 |
| 2.1.1.1.2 Module contents | 24 |
| 2.1.1.2 kwcoco.data package | 24 |
| 2.1.1.2.1 Submodules | 24 |
| 2.1.1.2.1.1 kwcoco.data.grab_camvid module | 24 |
| 2.1.1.2.1.2 kwcoco.data.grab_cifar module | 26 |
| 2.1.1.2.1.3 kwcoco.data.grab_datasets module | 26 |
| 2.1.1.2.1.4 kwcoco.data.grab_domainnet module | 26 |
| 2.1.1.2.1.5 kwcoco.data.grab_spacenet module | 26 |

| | | |
|--------------|---|-----|
| 2.1.1.2.1.6 | kwcoco.data.grab_voc module | 27 |
| 2.1.1.2.2 | Module contents | 28 |
| 2.1.1.3 | kwcoco.demo package | 28 |
| 2.1.1.3.1 | Submodules | 28 |
| 2.1.1.3.1.1 | kwcoco.demo.boids module | 28 |
| 2.1.1.3.1.2 | kwcoco.demo.perterb module | 32 |
| 2.1.1.3.1.3 | kwcoco.demo.toydata module | 34 |
| 2.1.1.3.1.4 | kwcoco.demo.toydata_image module | 47 |
| 2.1.1.3.1.5 | kwcoco.demo.toydata_video module | 53 |
| 2.1.1.3.1.6 | kwcoco.demo.toypatterns module | 68 |
| 2.1.1.3.2 | Module contents | 72 |
| 2.1.1.4 | kwcoco.examples package | 72 |
| 2.1.1.4.1 | Submodules | 72 |
| 2.1.1.4.1.1 | kwcoco.examples.bench_large_hyperspectral module | 72 |
| 2.1.1.4.1.2 | kwcoco.examples.demo_kwcoco_spaces module | 72 |
| 2.1.1.4.1.3 | kwcoco.examples.demo_sql_and_zip_files module | 72 |
| 2.1.1.4.1.4 | kwcoco.examples.draw_gt_and_predicted_boxes module | 72 |
| 2.1.1.4.1.5 | kwcoco.examples.faq module | 72 |
| 2.1.1.4.1.6 | kwcoco.examples.getting_started_existing_dataset module | 72 |
| 2.1.1.4.1.7 | kwcoco.examples.loading_multispectral_data module | 72 |
| 2.1.1.4.1.8 | kwcoco.examples.modification_example module | 72 |
| 2.1.1.4.1.9 | kwcoco.examples.shifting_annot module | 72 |
| 2.1.1.4.1.10 | kwcoco.examples.simple_kwcoco_torch_dataset module | 72 |
| 2.1.1.4.1.11 | kwcoco.examples.vectorized_interface module | 72 |
| 2.1.1.4.2 | Module contents | 72 |
| 2.1.1.5 | kwcoco.metrics package | 72 |
| 2.1.1.5.1 | Submodules | 72 |
| 2.1.1.5.1.1 | kwcoco.metrics.assignment module | 72 |
| 2.1.1.5.1.2 | kwcoco.metrics.clf_report module | 76 |
| 2.1.1.5.1.3 | kwcoco.metrics.confusion_measures module | 79 |
| 2.1.1.5.1.4 | kwcoco.metrics.confusion_vectors module | 90 |
| 2.1.1.5.1.5 | kwcoco.metrics.detect_metrics module | 99 |
| 2.1.1.5.1.6 | kwcoco.metrics.drawing module | 109 |
| 2.1.1.5.1.7 | kwcoco.metrics.functional module | 117 |
| 2.1.1.5.1.8 | kwcoco.metrics.sklearn_alts module | 118 |
| 2.1.1.5.1.9 | kwcoco.metrics.util module | 120 |
| 2.1.1.5.1.10 | kwcoco.metrics.voc_metrics module | 120 |
| 2.1.1.5.2 | Module contents | 123 |
| 2.1.1.6 | kwcoco.util package | 151 |
| 2.1.1.6.1 | Subpackages | 151 |
| 2.1.1.6.1.1 | kwcoco.util.delayed_ops package | 151 |
| 2.1.1.6.1.2 | Module contents | 151 |
| 2.1.1.6.2 | Submodules | 189 |
| 2.1.1.6.2.1 | kwcoco.util.dict_like module | 189 |
| 2.1.1.6.2.2 | kwcoco.util.dict_proxy2 module | 190 |
| 2.1.1.6.2.3 | kwcoco.util.jsonschema_elements module | 194 |
| 2.1.1.6.2.4 | kwcoco.util.lazy_frame_backends module | 200 |
| 2.1.1.6.2.5 | kwcoco.util.util_archive module | 200 |
| 2.1.1.6.2.6 | kwcoco.util.util_deprecate module | 202 |
| 2.1.1.6.2.7 | kwcoco.util.util_eval module | 202 |
| 2.1.1.6.2.8 | kwcoco.util.util_futures module | 203 |
| 2.1.1.6.2.9 | kwcoco.util.util_json module | 207 |
| 2.1.1.6.2.10 | kwcoco.util.util_monkey module | 209 |
| 2.1.1.6.2.11 | kwcoco.util.util_parallel module | 210 |

| | | |
|--------------|--|-----|
| 2.1.1.6.2.12 | kwcoco.util.util_reroot module | 211 |
| 2.1.1.6.2.13 | kwcoco.util.util_sklearn module | 212 |
| 2.1.1.6.2.14 | kwcoco.util.util_special_json module | 213 |
| 2.1.1.6.2.15 | kwcoco.util.util_truncate module | 214 |
| 2.1.1.6.2.16 | kwcoco.util.util_windows module | 214 |
| 2.1.1.6.3 | Module contents | 215 |
| 2.1.2 | Submodules | 234 |
| 2.1.2.1 | kwcoco.__main__ module | 234 |
| 2.1.2.2 | kwcoco._helpers module | 234 |
| 2.1.2.3 | kwcoco.abstract_coco_dataset module | 236 |
| 2.1.2.4 | kwcoco.category_tree module | 237 |
| 2.1.2.5 | kwcoco.channel_spec module | 242 |
| 2.1.2.6 | kwcoco.coco_dataset module | 242 |
| 2.1.2.7 | kwcoco.coco_evaluator module | 298 |
| 2.1.2.8 | kwcoco.coco_image module | 304 |
| 2.1.2.9 | kwcoco.coco_objects1d module | 320 |
| 2.1.2.10 | kwcoco.coco_schema module | 333 |
| 2.1.2.11 | kwcoco.coco_sql_dataset module | 334 |
| 2.1.2.12 | kwcoco.compat_dataset module | 350 |
| 2.1.2.13 | kwcoco.exceptions module | 354 |
| 2.1.2.14 | kwcoco.kpf module | 355 |
| 2.1.2.15 | kwcoco.kw18 module | 355 |
| 2.1.2.16 | kwcoco.sensorchan_spec module | 358 |
| 2.1.3 | Module contents | 358 |
| 2.1.3.1 | CocoDataset API | 360 |
| 2.1.3.1.1 | CocoDataset classmethods (via MixinCocoExtras) | 360 |
| 2.1.3.1.2 | CocoDataset classmethods (via CocoDataset) | 361 |
| 2.1.3.1.3 | CocoDataset slots | 361 |
| 2.1.3.1.4 | CocoDataset properties | 361 |
| 2.1.3.1.5 | CocoDataset methods (via MixinCocoAddRemove) | 362 |
| 2.1.3.1.6 | CocoDataset methods (via MixinCocoObjects) | 362 |
| 2.1.3.1.7 | CocoDataset methods (via MixinCocoStats) | 363 |
| 2.1.3.1.8 | CocoDataset methods (via MixinCocoAccessors) | 363 |
| 2.1.3.1.9 | CocoDataset methods (via CocoDataset) | 363 |
| 2.1.3.1.10 | CocoDataset methods (via MixinCocoExtras) | 364 |
| 2.1.3.1.11 | CocoDataset methods (via MixinCocoDraw) | 364 |

| | |
|----------------------------|------------|
| Bibliography | 421 |
| Python Module Index | 423 |
| Index | 425 |

If you are new, please see our getting started document: [getting_started](#)

Please also see information in the repo [README](#), which contains similar but complementary information.

Documentation about higher level kwcoco concepts can be found here. The Kitware COCO module defines a variant of the Microsoft COCO format, originally developed for the “collected images in context” object detection challenge. We are backwards compatible with the original module, but we also have improved implementations in several places, including segmentations, keypoints, annotation tracks, multi-spectral images, and videos (which represents a generic sequence of images).

A kwcoco file is a “manifest” that serves as a single reference that points to all images, categories, and annotations in a computer vision dataset. Thus, when applying an algorithm to a dataset, it is sufficient to have the algorithm take one dataset parameter: the path to the kwcoco file. Generally a kwcoco file will live in a “bundle” directory along with the data that it references, and paths in the kwcoco file will be relative to the location of the kwcoco file itself.

The main data structure in this model is largely based on the implementation in <https://github.com/cocodataset/cocoapi>. It uses the same efficient core indexing data structures, but in our implementation the indexing can be optionally turned off, functions are silent by default (with the exception of long running processes, which optionally show progress by default). We support helper functions that add and remove images, categories, and annotations.

The `kwcoco.CocoDataset` class is capable of dynamic addition and removal of categories, images, and annotations. Has better support for keypoints and segmentation formats than the original COCO format. Despite being written in Python, this data structure is reasonably efficient.

```
>>> import kwcoco
>>> import json
>>> # Create demo data
>>> demo = kwcoco.CocoDataset.demo()
>>> # Reroot can switch between absolute / relative-paths
>>> demo.reroot(absolute=True)
>>> # could also use demo.dump / demo.dumps, but this is more explicit
>>> text = json.dumps(demo.dataset)
>>> with open('demo.json', 'w') as file:
>>>     file.write(text)

>>> # Read from disk
>>> self = kwcoco.CocoDataset('demo.json')

>>> # Add data
>>> cid = self.add_category('Cat')
>>> gid = self.add_image('new-img.jpg')
>>> aid = self.add_annotation(image_id=gid, category_id=cid, bbox=[0, 0, 100, 100])

>>> # Remove data
>>> self.remove_annotations([aid])
>>> self.remove_images([gid])
>>> self.remove_categories([cid])

>>> # Look at data
>>> import ubelt as ub
>>> print(ub.urepr(self.basic_stats(), nl=1))
>>> print(ub.urepr(self.extended_stats(), nl=2))
>>> print(ub.urepr(self.boxsize_stats(), nl=3))
>>> print(ub.urepr(self.category_annotation_frequency()))
```

(continues on next page)

(continued from previous page)

```
>>> # Inspect data
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> import kwplot
>>> kwplot.autompl()
>>> self.show_image(gid=1)

>>> # Access single-item data via imgs, cats, anns
>>> cid = 1
>>> self.cats[cid]
{'id': 1, 'name': 'astronaut', 'supercategory': 'human'}

>>> gid = 1
>>> self.imgs[gid]
{'id': 1, 'file_name': '...astro.png', 'url': 'https://i.imgur.com/KXhKM72.png'}

>>> aid = 3
>>> self.anns[aid]
{'id': 3, 'image_id': 1, 'category_id': 3, 'line': [326, 369, 500, 500]}

>>> # Access multi-item data via the annots and images helper objects
>>> aids = self.index.gid_to_aids[2]
>>> annots = self.annots(aids)

>>> print('annots = {}'.format(ub.urepr(annots, nl=1, sv=1)))
annots = <Annos(num=2)>

>>> annots.lookup('category_id')
[6, 4]

>>> annots.lookup('bbox')
[[37, 6, 230, 240], [124, 96, 45, 18]]

>>> # built in conversions to efficient kwimage array DataStructures
>>> print(ub.urepr(annots.detections.data, sv=1))
{
    'boxes': <Boxes( xywh,
                      array([[ 37.,   6., 230., 240.],
                             [124.,  96.,  45.,  18.]], dtype=float32))>,
    'class_idxs': [5, 3],
    'keypoints': <PointsList(n=2)>,
    'segmentations': <PolygonList(n=2)>,
}

>>> gids = list(self.imgs.keys())
>>> images = self.images(gids)
>>> print('images = {}'.format(ub.urepr(images, nl=1, sv=1)))
images = <Images(num=3)>

>>> images.lookup('file_name')
['...astro.png', '...carl.png', '...stars.png']

>>> print('images.annots = {}'.format(images.annots))
```

(continues on next page)

(continued from previous page)

```
images.annots = <AnnotGroups(n=3, m=3.7, s=3.9)>

>>> print('images.annots.cids = {!r}'.format(images.annots.cids))
images.annots.cids = [[1, 2, 3, 4, 5, 5, 5, 5], [6, 4], []]
```


COCODATASET API

The following is a logical grouping of the public `kwcoco.CocoDataset` API attributes and methods. See the in-code documentation for further details.

1.1 CocoDataset classmethods (via MixinCocoExtras)

- `kwcoco.CocoDataset.coerce` - Attempt to transform the input into the intended CocoDataset.
- `kwcoco.CocoDataset.demo` - Create a toy coco dataset for testing and demo puposes
- `kwcoco.CocoDataset.random` - Creates a random CocoDataset according to distribution parameters

1.2 CocoDataset classmethods (via CocoDataset)

- `kwcoco.CocoDataset.from_coco_paths` - Constructor from multiple coco file paths.
- `kwcoco.CocoDataset.from_data` - Constructor from a json dictionary
- `kwcoco.CocoDataset.from_image_paths` - Constructor from a list of images paths.

1.3 CocoDataset slots

- `kwcoco.CocoDataset.index` - an efficient lookup index into the coco data structure. The index defines its own attributes like `anns`, `cats`, `imgs`, `gid_to_aids`, `file_name_to_img`, etc. See `CocoIndex` for more details on which attributes are available.
- `kwcoco.CocoDataset.hashid` - If computed, this will be a hash uniquely identifying the dataset. To ensure this is computed see `kwcoco.coco_dataset.MixinCocoExtras._build_hashid()`.
- `kwcoco.CocoDataset.hashid_parts` -
- `kwcoco.CocoDataset.tag` - A tag indicating the name of the dataset.
- `kwcoco.CocoDataset.dataset` - raw json data structure. This is the base dictionary that contains {‘annotations’: List, ‘images’: List, ‘categories’: List}
- `kwcoco.CocoDataset.bundle_dpath` - If known, this is the root path that all image file names are relative to. This can also be manually overwritten by the user.
- `kwcoco.CocoDataset.assets_dpath` -
- `kwcoco.CocoDataset.cache_dpath` -

1.4 CocoDataset properties

- `kwcoco.CocoDataset.anns` -
- `kwcoco.CocoDataset.cats` -
- `kwcoco.CocoDataset.cid_to_aids` -
- `kwcoco.CocoDataset.data_fpath` -
- `kwcoco.CocoDataset.data_root` -
- `kwcoco.CocoDataset.fpath` - if known, this stores the filepath the dataset was loaded from
- `kwcoco.CocoDataset.gid_to_aids` -
- `kwcoco.CocoDataset.img_root` -
- `kwcoco.CocoDataset imgs` -
- `kwcoco.CocoDataset.n_annots` -
- `kwcoco.CocoDataset.n_cats` -
- `kwcoco.CocoDataset.n_images` -
- `kwcoco.CocoDataset.n_videos` -
- `kwcoco.CocoDataset.name_to_cat` -

1.5 CocoDataset methods (via MixinCocoAddRemove)

- `kwcoco.CocoDataset.add_annotation` - Add an annotation to the dataset (dynamically updates the index)
- `kwcoco.CocoDataset.add_annotations` - Faster less-safe multi-item alternative to add_annotation.
- `kwcoco.CocoDataset.add_category` - Adds a category
- `kwcoco.CocoDataset.add_image` - Add an image to the dataset (dynamically updates the index)
- `kwcoco.CocoDataset.add_images` - Faster less-safe multi-item alternative
- `kwcoco.CocoDataset.add_video` - Add a video to the dataset (dynamically updates the index)
- `kwcoco.CocoDataset.clear_annotations` - Removes all annotations (but not images and categories)
- `kwcoco.CocoDataset.clear_images` - Removes all images and annotations (but not categories)
- `kwcoco.CocoDataset.ensure_category` - Like add_category(), but returns the existing category id if it already exists instead of failing. In this case all metadata is ignored.
- `kwcoco.CocoDataset.ensure_image` - Like add_image(), but returns the existing image id if it already exists instead of failing. In this case all metadata is ignored.
- `kwcoco.CocoDataset.remove_annotation` - Remove a single annotation from the dataset
- `kwcoco.CocoDataset.remove_annotation_keypoints` - Removes all keypoints with a particular category
- `kwcoco.CocoDataset.remove_annotations` - Remove multiple annotations from the dataset.
- `kwcoco.CocoDataset.remove_categories` - Remove categories and all annotations in those categories. Currently does not change any hierarchy information
- `kwcoco.CocoDataset.remove_images` - Remove images and any annotations contained by them

- `kwcoco.CocoDataset.remove_keypoint_categories` - Removes all keypoints of a particular category as well as all annotation keypoints with those ids.
- `kwcoco.CocoDataset.remove_videos` - Remove videos and any images / annotations contained by them
- `kwcoco.CocoDataset.set_annotation_category` - Sets the category of a single annotation

1.6 CocoDataset methods (via MixinCocoObjects)

- `kwcoco.CocoDataset.annots` - Return vectorized annotation objects
- `kwcoco.CocoDataset.categories` - Return vectorized category objects
- `kwcoco.CocoDataset.images` - Return vectorized image objects
- `kwcoco.CocoDataset.videos` - Return vectorized video objects

1.7 CocoDataset methods (via MixinCocoStats)

- `kwcoco.CocoDataset.basic_stats` - Reports number of images, annotations, and categories.
- `kwcoco.CocoDataset.boxsize_stats` - Compute statistics about bounding box sizes.
- `kwcoco.CocoDataset.category_annotation_frequency` - Reports the number of annotations of each category
- `kwcoco.CocoDataset.category_annotation_type_frequency` - Reports the number of annotations of each type for each category
- `kwcoco.CocoDataset.conform` - Make the COCO file conform a stricter spec, infers attributes where possible.
- `kwcoco.CocoDataset.extended_stats` - Reports number of images, annotations, and categories.
- `kwcoco.CocoDataset.find_representative_images` - Find images that have a wide array of categories. Attempt to find the fewest images that cover all categories using images that contain both a large and small number of annotations.
- `kwcoco.CocoDataset.keypoint_annotation_frequency` -
- `kwcoco.CocoDataset.stats` - This function corresponds to `kwcoco.cli.coco_stats`.
- `kwcoco.CocoDataset.validate` - Performs checks on this coco dataset.

1.8 CocoDataset methods (via MixinCocoAccessors)

- `kwcoco.CocoDataset.category_graph` - Construct a networkx category hierarchy
- `kwcoco.CocoDataset.delayed_load` - Experimental method
- `kwcoco.CocoDataset.get_auxiliary_fpath` - Returns the full path to auxiliary data for an image
- `kwcoco.CocoDataset.get_image_fpath` - Returns the full path to the image
- `kwcoco.CocoDataset.keypoint_categories` - Construct a consistent CategoryTree representation of key-point classes
- `kwcoco.CocoDataset.load_annot_sample` - Reads the chip of an annotation. Note this is much less efficient than using a sampler, but it doesn't require disk cache.

- `kwcoco.CocoDataset.load_image` - Reads an image from disk and
- `kwcoco.CocoDataset.object_categories` - Construct a consistent CategoryTree representation of object classes

1.9 CocoDataset methods (via CocoDataset)

- `kwcoco.CocoDataset.copy` - Deep copies this object
- `kwcoco.CocoDataset.dump` - Writes the dataset out to the json format
- `kwcoco.CocoDataset.dumps` - Writes the dataset out to the json format
- `kwcoco.CocoDataset.subset` - Return a subset of the larger coco dataset by specifying which images to port. All annotations in those images will be taken.
- `kwcoco.CocoDataset.union` - Merges multiple CocoDataset items into one. Names and associations are retained, but ids may be different.
- `kwcoco.CocoDataset.view_sql` - Create a cached SQL interface to this dataset suitable for large scale multiprocesing use cases.

1.10 CocoDataset methods (via MixinCocoExtras)

- `kwcoco.CocoDataset.corrupted_images` - Check for images that don't exist or can't be opened
- `kwcoco.CocoDataset.missing_images` - Check for images that don't exist
- `kwcoco.CocoDataset.rename_categories` - Rename categories with a potentially coarser categorization.
- `kwcoco.CocoDataset.reroot` - Rebase image/data paths onto a new image/data root.

1.11 CocoDataset methods (via MixinCocoDraw)

- `kwcoco.CocoDataset.draw_image` - Use kwimage to draw all annotations on an image and return the pixels as a numpy array.
- `kwcoco.CocoDataset.imread` - Loads a particular image
- `kwcoco.CocoDataset.show_image` - Use matplotlib to show an image with annotations overlaid

KWCOCO

2.1 kwcoco package

2.1.1 Subpackages

2.1.1.1 kwcoco.cli package

2.1.1.1.1 Submodules

2.1.1.1.1.1 kwcoco.cli.__main__ module

```
kwcoco.cli.__main__.main(cmdline=True, **kw)
    kw = dict(command='stats') cmdline = False
```

2.1.1.1.1.2 kwcoco.cli.coco_conform module

```
class kwcoco.cli.coco_conform.CocoConformCLI
```

Bases: `object`

`name = 'conform'`

```
class CLIConfig(data=None, default=None, cmdline=False)
```

Bases: `Config`

Infer properties to make the COCO file conform to different specs.

Arguments can be used to control which information is inferred. By default, information such as image size, annotation area, are added to the file.

Other arguments like `--legacy` and `--mmlab` can be used to conform to specifications expected by external tooling.

Parameters

- **data** (*object*) – filepath, dict, or None
- **default** (*dict* | *None*) – overrides the class defaults
- **cmdline** (*bool* | *List[str]* | *str* | *dict*) – If False, then no command line information is used. If True, then `sys.argv` is parsed and used. If a list of strings that used instead of `sys.argv`. If a string, then that is parsed using `shlex` and used instead of `sys.argv`.

If a dictionary grants fine grained controls over the args passed to `Config._read_argv()`.
Can contain:

- strict (bool): defaults to False
- argv (List[str]): defaults to None
- special_options (bool): defaults to True
- autocomplete (bool): defaults to False

Defaults to False.

Note: Avoid setting `cmdline` parameter here. Instead prefer to use the `cli` classmethod to create a command line aware config instance..

```
epilog = '\n Example Usage:\n kwcoco conform --help\n kwcoco conform\n--src=shapes8 --dst conformed.json\n kwcoco conform special:shapes8\nconformed.json\n'\n\ndefault = {'compress': <Value('auto')>, 'dst': <Value(None)>,\n'ensure_imgsize': <Value(True)>, 'legacy': <Value(False)>, 'mmlab':\n<Value(False)>, 'pycocotools_info': <Value(True)>, 'src': <Value(None)>,\n'workers': <Value(8)>}\n\nclassmethod main(cmdline=True, **kw)
```

Example

```
>>> from kwcoco.cli.coco_conform import * # NOQA\n>>> import kwcoco\n>>> import ubelt as ub\n>>> dpath = ub.Path.appdir('kwcoco/tests/cli/conform').ensuredir()\n>>> dst = dpath / 'out.kwcoco.json'\n>>> kw = {'src': 'special:shapes8', 'dst': dst, 'compress': True}\n>>> cmdline = False\n>>> cls = CocoConformCLI\n>>> cls.main(cmdline, **kw)
```

`kwcoco.cli.coco_conform._CLI`

alias of `CocoConformCLI`

2.1.1.1.3 `kwcoco.cli.coco_eval` module

Wraps the logic in `kwcoco/coco_evaluator.py` with a command line script

`class kwcoco.cli.coco_eval.CocoEvalCLICConfig(*args, **kwargs)`

Bases: `CocoEvalConfig`

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

```

default = {'ap_method': <Value('pycocotools')>, 'area_range': <Value(['all'])>,
'assign_workers': <Value(8)>, 'classes_of_interest': <Value(None)>, 'compat':
<Value('mutex')>, 'draw': <Value(True)>, 'expt_title': <Value('')>,
'force_pycocoutils': <Value(False)>, 'fp_cutoff': <Value(inf)>, 'ignore_classes':
<Value(None)>, 'implicit_ignore_classes': <Value(['ignore'])>,
'implicit_negative_classes': <Value(['background'])>, 'iou_bias': <Value(1)>,
'iou_thresh': <Value(0.5)>, 'load_workers': <Value(0)>, 'max_dets': <Value(inf)>,
'monotonic_ppv': <Value(True)>, 'out_dpath': <Value('./coco_metrics')>,
'pred_dataset': <Value(None)>, 'true_dataset': <Value(None)>, 'use_area_attr':
<Value('try')>, 'use_image_names': <Value(False)>}

class kwcoco.cli.coco_eval.CocoEvalCLI
    Bases: object
    name = 'eval'

    CLIConfig
        alias of CocoEvalCLICConfig

    classmethod main(cmdline=True, **kw)

```

Example

```

>>> # xdoctest: +REQUIRES(module:kwplot)
>>> from kwcoco.cli.coco_eval import * # NOQA
>>> import ubelt as ub
>>> from kwcoco.cli.coco_eval import * # NOQA
>>> from os.path import join
>>> import kwcoco
>>> dpath = ub.Path.appdir('kwcoco/tests/eval').ensuredir()
>>> true_dset = kwcoco.CocoDataset.demo('shapes8')
>>> from kwcoco.demo.perterb import perterb_coco
>>> kwargs = {
>>>     'box_noise': 0.5,
>>>     'n_fp': (0, 10),
>>>     'n_fn': (0, 10),
>>> }
>>> pred_dset = perterb_coco(true_dset, **kwargs)
>>> true_dset.fpath = join(dpath, 'true.mscoco.json')
>>> pred_dset.fpath = join(dpath, 'pred.mscoco.json')
>>> true_dset.dump(true_dset.fpath)
>>> pred_dset.dump(pred_dset.fpath)
>>> draw = False # set to false for faster tests
>>> CocoEvalCLI.main(cmdline=False,
>>>                   true_dataset=true_dset.fpath,
>>>                   pred_dataset=pred_dset.fpath,
>>>                   draw=draw, out_dpath=dpath)

```

```
kwcoco.cli.coco_eval.main(cmdline=True, **kw)
```

Todo:

- [X] should live in kwcoco.cli.coco_eval
-

CommandLine

```
# Generate test data
xdoctest -m kwcoc.cli.coco_eval CocoEvalCLI.main

kwcoc eval \
    --true_dataset=$HOME/.cache/kwcoco/tests/eval/true.msco.json \
    --pred_dataset=$HOME/.cache/kwcoco/tests/eval/pred.msco.json \
    --out_dpath=$HOME/.cache/kwcoco/tests/eval/out \
    --force_pycocoutils=False \
    --area_range=all,0-4096,4096-inf

nautilus $HOME/.cache/kwcoco/tests/eval/out
```

kwcoc.cli.coco_eval._CLI

alias of *CocoEvalCLI*

2.1.1.1.4 kwcoc.cli.coco_grab module

```
class kwcoc.cli.coco_grab.CocoGrabCLI
    Bases: object
    name = 'grab'

    class CLIConfig(data=None, default=None, cmdline=False)
        Bases: Config
        Grab standard datasets.
```

Example

```
kwcoc grab cifar10 camvid
```

Parameters

- **data** (*object*) – filepath, dict, or None
- **default** (*dict* | *None*) – overrides the class defaults
- **cmdline** (*bool* | *List[str]* | *str* | *dict*) – If False, then no command line information is used. If True, then sys.argv is parsed and used. If a list of strings that used instead of sys.argv. If a string, then that is parsed using shlex and used instead of sys.argv.

If a dictionary grants fine grained controls over the args passed to *Config._read_argv()*. Can contain:

- strict (*bool*): defaults to False
- argv (*List[str]*): defaults to None
- special_options (*bool*): defaults to True
- autocomplete (*bool*): defaults to False

Defaults to False.

Note: Avoid setting `cmdline` parameter here. Instead prefer to use the `cli` classmethod to create a command line aware config instance..

```
default = {'dpath': <Path(Path('/home/docs/.cache/kwcoco/data'))>, 'names':  
<Value([])>}  
  
classmethod main(cmdline=True, **kw)  
  
kwcoco.cli.coco_grab._CLI  
alias of CocoGrabCLI
```

2.1.1.1.5 kwcoco.cli.coco_modify_categories module

```
class kwcoco.cli.coco_modify_categories.CocoModifyCatsCLI
```

Bases: `object`

Remove, rename, or coarsen categories.

```
name = 'modify_categories'
```

```
class CLIConfig(data=None, default=None, cmdline=False)
```

Bases: `Config`

Rename or remove categories

Parameters

- **data** (*object*) – filepath, dict, or None
- **default** (*dict* | *None*) – overrides the class defaults
- **cmdline** (*bool* | *List[str]* | *str* | *dict*) – If False, then no command line information is used. If True, then `sys.argv` is parsed and used. If a list of strings that used instead of `sys.argv`. If a string, then that is parsed using shlex and used instead of `sys.argv`.

If a dictionary grants fine grained controls over the args passed to `Config._read_argv()`. Can contain:

- strict (bool): defaults to False
- argv (*List[str]*): defaults to None
- special_options (bool): defaults to True
- autocomplete (bool): defaults to False

Defaults to False.

Note: Avoid setting `cmdline` parameter here. Instead prefer to use the `cli` classmethod to create a command line aware config instance..

```
epilog = '\n Example Usage:\n kwcococo modify_categories --help\n kwcococo\nmodify_categories --src=shapes8 --dst modcats.json\n kwcococo\nmodify_categories --src=shapes8 --dst modcats.json --rename\n eff:star\n kwcococo modify_categories --src=shapes8 --dst\nmodcats.json --remove eff,star\n kwcococo modify_categories --src=shapes8\n--dst modcats.json --keep eff,\n kwcococo modify_categories\n--src=shapes8 --dst modcats.json --keep=[] --keep_annot=True\n\n\ndefault = {'compress': <Value('auto')>, 'dst': <Value(None)>, 'keep':\n<Value(None)>, 'keep_annot': <Value(False)>, 'remove': <Value(None)>,\n'rename': <Value(None)>, 'src': <Value(None)>}\n\nclassmethod main(cmdline=True, **kw)
```

Example

```
>>> # xdoctest: +SKIP\n>>> kw = {'src': 'special:shapes8'}\n>>> cmdline = False\n>>> cls = CocoModifyCatsCLI\n>>> cls.main(cmdline, **kw)
```

`kwcococo.cli.coco_modify_categories._CLI`

alias of `CocoModifyCatsCLI`

2.1.1.1.6 `kwcococo.cli.coco_move` module

`class kwcococo.cli.coco_move.CocoMove(*args, **kwargs)`

Bases: `DataConfig`

Move a kwcococo file to a new location while maintaining relative paths. This is equivalent to a regular copy followed by `kwcococo reroot` followed by a delete of the original.

TODO: add option to move the assets as well?

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

`classmethod main(cmdline=False, **kwargs)`

Example

```
>>> import ubelt as ub
>>> from kwcoco.cli import coco_move
>>> import kwcoco
>>> dpath = ub.Path.appdir('kwcoco/doctest/move')
>>> dpath.delete().ensuredir()
>>> dset = kwcoco.CocoDataset.demo('vidshapes2', dpath=dpath)
>>> cmdline = 0
>>> dst = (ub.Path(dset.bundle_dpath) / 'new_dpath').ensuredir()
>>> kwargs = dict(src=dset.fpath, dst=dst)
>>> coco_move.CocoMove.main(cmdline=cmdline, **kwargs)
>>> assert dst.exists()
>>> assert not ub.Path(dset.fpath).exists()

default = {'absolute': <Value(False)>, 'check': <Value(True)>, 'dst': <Value(None)>, 'src': <Value(None)>}
```

2.1.1.1.7 kwcoco.cli.coco_reroot module

class kwcoco.cli.coco_reroot.CocoRerootCLI

Bases: `object`

name = 'reroot'

class CocoRerootConfig(*args, **kwargs)

Bases: `DataConfig`

Reroot image paths onto a new image root.

Modify the root of a coco dataset such to either make paths relative to a new root or make paths absolute.

Todo:

- [] Evaluate that all tests cases work

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

```
default = {'absolute': <Value(True)>, 'autofix': <Value(False)>, 'check': <Value(True)>, 'compress': <Value('auto')>, 'dst': <Value(None)>, 'inplace': <Value(False)>, 'new_prefix': <Value(None)>, 'old_prefix': <Value(None)>, 'src': <Value(None)>}
```

CLIConfig

alias of `CocoRerootConfig`

classmethod main(cmdline=True, **kw)

Example

```
>>> # xdoctest: +SKIP
>>> kw = {'src': 'special:shapes8'}
>>> cmdline = False
>>> cls = CocoRerootCLI
>>> cls.main(cmdline, **kw)
```

kwcoc.cli.coco_reroot.**find_reroot_autofix**(*dset*)

kwcoc.cli.coco_reroot._CLI

alias of *CocoRerootCLI*

2.1.1.1.8 kwcoc.cli.coco_show module

class kwcoc.cli.coco_show.CocoShowCLI

Bases: *object*

name = 'show'

class CLIConfig(*data=None*, *default=None*, *cmdline=False*)

Bases: *Config*

Visualize a COCO image using matplotlib or opencv, optionally writing it to disk

Parameters

- **data** (*object*) – filepath, dict, or None
- **default** (*dict* | *None*) – overrides the class defaults
- **cmdline** (*bool* | *List[str]* | *str* | *dict*) – If False, then no command line information is used. If True, then sys.argv is parsed and used. If a list of strings that used instead of sys.argv. If a string, then that is parsed using shlex and used instead of sys.argv.

If a dictionary grants fine grained controls over the args passed to *Config._read_argv()*. Can contain:

- strict (bool): defaults to False
- argv (*List[str]*): defaults to None
- special_options (bool): defaults to True
- autocomplete (bool): defaults to False

Defaults to False.

Note: Avoid setting *cmdline* parameter here. Instead prefer to use the *cli* classmethod to create a command line aware config instance..

```
default = {'aid': <Value(None)>, 'channels': <Value(None)>, 'dst': <Value(None)>, 'gid': <Value(None)>, 'mode': <Value('matplotlib')>, 'show_annot': <Value(True)>, 'show_labels': <Value(False)>, 'src': <Value(None)>}
```

```
classmethod main(cmdline=True, **kw)
```

Todo:

- [] Visualize auxiliary data
-

Example

```
>>> # xdoctest: +SKIP
>>> kw = {'src': 'special:shapes8'}
>>> cmdline = False
>>> cls = CocoShowCLI
>>> cls.main(cmdline, **kw)
```

`kwcoco.cli.coco_show._CLI`

alias of `CocoShowCLI`

2.1.1.1.9 `kwcoco.cli.coco_split` module

`class kwcoco.cli.coco_split.CocoSplitCLI`

Bases: `object`

Splits a coco files into two parts base on some criteria.

Useful for generating quick and dirty train/test splits, but in general users should opt for using `kwcoco subset` instead to explicitly construct these splits based on domain knowledge.

`name = 'split'`

`class CLIConfig(data=None, default=None, cmdline=False)`

Bases: `Config`

Split a single COCO dataset into two sub-datasets.

Parameters

- `data (object)` – filepath, dict, or None
- `default (dict | None)` – overrides the class defaults
- `cmdline (bool | List[str] | str | dict)` – If False, then no command line information is used. If True, then sys.argv is parsed and used. If a list of strings that used instead of sys.argv. If a string, then that is parsed using shlex and used instead of sys.argv.

If a dictionary grants fine grained controls over the args passed to `Config._read_argv()`. Can contain:

- strict (bool): defaults to False
- argv (List[str]): defaults to None
- special_options (bool): defaults to True
- autocomplete (bool): defaults to False

Defaults to False.

Note: Avoid setting cmdline parameter here. Instead prefer to use the cli classmethod to create a command line aware config instance..

```
default = {'balance_categories': <Value(True)>, 'compress': <Value('auto')>,
'dst1': <Value('split1.kwcoco.json')>, 'dst2': <Value('split2.kwcoco.json')>,
'factor': <Value(3)>, 'num_write': <Value(1)>, 'rng': <Value(None)>,
'splitter': <Value('auto')>, 'src': <Value(None)>}

classmethod main(cmdline=True, **kw)
```

Example

```
>>> from kwCOCO.cli.coco_split import * # NOQA
>>> import ubelt as ub
>>> dpath = ub.Path.appdir('kwCOCO/tests/cli/split').ensuredir()
>>> kw = {'src': 'special:vidshapes8',
>>>       'dst1': dpath / 'train.json',
>>>       'dst2': dpath / 'test.json'}
>>> cmdline = False
>>> cls = CocoSplitCLI
>>> cls.main(cmdline, **kw)
```

`kwCOCO.cli.coco_split._CLI`

alias of *CocoSplitCLI*

2.1.1.1.10 `kwCOCO.cli.coco_stats` module

`class kwCOCO.cli.coco_stats.CocoStatsCLI`

Bases: `object`

`name = 'stats'`

`class CLIConfig(*args, **kwargs)`

Bases: `DataConfig`

Compute summary statistics about a COCO dataset

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

```
default = {'annot_attrs': <Value(False)>, 'basic': <Value(True)>, 'boxes':
<Value(False)>, 'catfreq': <Value(True)>, 'embed': <Value(False)>, 'extended':
<Value(True)>, 'image_attrs': <Value(False)>, 'image_size': <Value(False)>,
'io_workers': <Value(0)>, 'src': <Value(['special:shapes8'])>, 'video_attrs':
<Value(False)>}
```

```
classmethod main(cmdline=True, **kw)
```

Example

```
>>> kw = {'src': 'special:shapes8'}
>>> cmdline = False
>>> cls = CocoStatsCLI
>>> cls.main(cmdline, **kw)
```

`kwcocoo.cli.coco_stats._CLI`alias of `CocoStatsCLI``kwcocoo.cli.coco_stats.main(cmdline=True, **kw)`**Example**

```
>>> kw = {'src': 'special:shapes8'}
>>> cmdline = False
>>> cls = CocoStatsCLI
>>> cls.main(cmdline, **kw)
```

2.1.1.1.11 kwcocoo.cli.coco_subset module`class kwcocoo.cli.coco_subset.CocoSubsetCLI`Bases: `object``name = 'subset'``class CocoSubetConfig(*args, **kwargs)`Bases: `DataConfig`

Take a subset of this dataset and write it to a new file

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

```
default = {'absolute': <Value('auto')>, 'channels': <Value(None)>, 'compress': <Value('auto')>, 'copy_assets': <Value(False)>, 'dst': <Value(None)>, 'gids': <Value(None)>, 'include_categories': <Value(None)>, 'select_images': <Value(None)>, 'select_videos': <Value(None)>, 'src': <Value(None)>}
```

`CLICConfig`alias of `CocoSubetConfig``classmethod main(cmdline=True, **kw)`

Example

```
>>> from kwcoco.cli.coco_subset import * # NOQA
>>> import ubelt as ub
>>> dpath = ub.Path.appdir('kwcoco/tests/cli/union').ensuredir()
>>> kw = {'src': 'special:shapes8',
>>>       'dst': dpath / 'subset.json',
>>>       'include_categories': 'superstar'}
>>> cmdline = False
>>> cls = CocoSubsetCLI
>>> cls.main(cmdline, **kw)
```

kwcoco.cli.coco_subset.query_subset(*dset, config*)

Example

```
>>> # xdoctest: +REQUIRES(module:jq)
>>> from kwcoco.cli.coco_subset import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> assert dset.n_images == 3
>>> #
>>> config = CocoSubsetCLI.CLICConfig(**{'select_images': '.id < 3'})
>>> new_dset = query_subset(dset, config)
>>> assert new_dset.n_images == 2
>>> #
>>> config = CocoSubsetCLI.CLICConfig(**{'select_images': '.file_name | test(".*.png\n->")'})
>>> new_dset = query_subset(dset, config)
>>> assert all(n.endswith('.png') for n in new_dset.images().lookup('file_name'))
>>> assert new_dset.n_images == 2
>>> #
>>> config = CocoSubsetCLI.CLICConfig(**{'select_images': '.file_name | test(".*.png\n->") | not'})
>>> new_dset = query_subset(dset, config)
>>> assert not any(n.endswith('.png') for n in new_dset.images().lookup('file_name'))
>>> assert new_dset.n_images == 1
>>> #
>>> config = CocoSubsetCLI.CLICConfig(**{'select_images': '.id < 3 and (.file_name |_\n->test(".*.png"))'})
>>> new_dset = query_subset(dset, config)
>>> assert new_dset.n_images == 1
>>> #
>>> config = CocoSubsetCLI.CLICConfig(**{'select_images': '.id < 3 or (.file_name |_\n->test(".*.png"))'})
>>> new_dset = query_subset(dset, config)
>>> assert new_dset.n_images == 3
```

Example

```
>>> # xdoctest: +REQUIRES(module:jq)
>>> from kwcoco.cli.coco_subset import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8')
>>> assert dset.n_videos == 8
>>> assert dset.n_images == 16
>>> config = CocoSubsetCLI.CLICConfig(**{'select_videos': '.name == "toy_video_3''})
>>> new_dset = query_subset(dset, config)
>>> assert new_dset.n_images == 2
>>> assert new_dset.n_videos == 1
```

`kwcoco.cli.coco_subset._CLI`

alias of `CocoSubsetCLI`

2.1.1.1.12 `kwcoco.cli.coco_toydata` module

```
class kwcoco.cli.coco_toydata.CocoToyDataCLI
    Bases: object

    name = 'toydata'

    class CLICConfig(data=None, default=None, cmdline=False)
        Bases: Config
```

Create COCO toydata for demo and testing purposes.

Parameters

- **data** (*object*) – filepath, dict, or None
- **default** (*dict* | *None*) – overrides the class defaults
- **cmdline** (*bool* | *List[str]* | *str* | *dict*) – If False, then no command line information is used. If True, then sys.argv is parsed and used. If a list of strings that used instead of sys.argv. If a string, then that is parsed using shlex and used instead of sys.argv.

If a dictionary grants fine grained controls over the args passed to `Config._read_argv()`. Can contain:

- strict (bool): defaults to False
- argv (List[str]): defaults to None
- special_options (bool): defaults to True
- autocomplete (bool): defaults to False

Defaults to False.

Note: Avoid setting `cmdline` parameter here. Instead prefer to use the `cli` classmethod to create a command line aware config instance..

```
epilog = '\n Example Usage:\n kwCOCO toydata --key=shapes8\n --dst=toydata.kwCOCO.json\n\n kwCOCO toydata --key=shapes8\n --bundle_dpath=my_test_bundle_v1\n kwCOCO toydata --key=shapes8\n --bundle_dpath=my_test_bundle_v1\n\n kwCOCO toydata \\\n --key=vidshapes1-frames32 \\\n --dst=./mytoybundle/dataset.kwCOCO.json\n\n TODO:\n - [ ] allow specification of images directory\n '\n\n default = {'bundle_dpath': <Value(None)>, 'dst': <Value(None)>, 'key':\n <Value('shapes8')>, 'use_cache': <Value(True)>, 'verbose': <Value(False)>}\n\n @classmethod def main(cmdline=True, **kw):\n     pass
```

Example

```
>>> from kwCOCO.cli.coco_toydata import * # NOQA\n>>> import ubelt as ub\n>>> dpath = ub.Path.appdir('kwCOCO/tests/cli/demo').ensuredir()\n>>> kw = {'key': 'shapes8', 'dst': dpath / 'test.json'}\n>>> cmdline = False\n>>> cls = CocoToyDataCLI\n>>> cls.main(cmdline, **kw)
```

`kwCOCO.cli.coco_toydata._CLI`

alias of `CocoToyDataCLI`

2.1.1.1.13 `kwCOCO.cli.coco_union` module

`class kwCOCO.cli.coco_union.CocoUnionCLI`

Bases: `object`

`name = 'union'`

`class CLIConfig(*args, **kwargs)`

Bases: `DataConfig`

Combine multiple COCO datasets into a single merged dataset.

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

`default = {'absolute': <Value(False)>, 'compress': <Value('auto')>, 'dst':\n <Value('combo.kwCOCO.json')>, 'io_workers': <Value('avail-2')>, 'remember_parent':\n <Value(False)>, 'src': <Value([])>}`

`@classmethod def main(cmdline=True, **kw):\n pass`

Example

```
>>> from kwcoco.cli.coco_union import * # NOQA
>>> import ubelt as ub
>>> dpath = ub.Path.appdir('kwcoco/tests/cli/union').ensuredir()
>>> dst_fpath = dpath / 'combo.kwcoco.json'
>>> kw = {
>>>     'src': ['special:shapes8', 'special:shapes1'],
>>>     'dst': dst_fpath
>>> }
>>> cmdline = False
>>> cls = CocoUnionCLI
>>> cls.main(cmdline, **kw)
```

`kwcoco.cli.coco_union._postprocess_absolute(dset)`

`kwcoco.cli.coco_union._CLI`

alias of `CocoUnionCLI`

2.1.1.1.14 `kwcoco.cli.coco_validate` module

`class kwcoco.cli.coco_validate.CocoValidateCLI`

Bases: `object`

`name = 'validate'`

`class CLIConfig(*args, **kwargs)`

Bases: `DataConfig`

Validates that a coco file satisfies expected properties.

Checks that a coco file conforms to the json schema, that assets exist, and that other expected properties are satisfied.

This also has the ability to fix corrupted assets by removing them, but that functionality may be moved to a new command in the future.

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

`default = {'channels': <Value(True)>, 'corrupted': <Value(False)>, 'dst': <Value(None)>, 'fastfail': <Value(False)>, 'fix': <Value(None)>, 'img_attrs': <Value('warn')>, 'missing': <Value(True)>, 'require_relative': <Value(False)>, 'schema': <Value(True)>, 'src': <Value(None)>, 'unique': <Value(True)>, 'verbose': <Value(1)>, 'workers': <Value(0)>}`

`classmethod main(cmdline=True, **kw)`

Example

```
>>> from kwcoco.cli.coco_validate import * # NOQA
>>> kw = {'src': 'special:shapes8'}
>>> cmdline = False
>>> cls = CocoValidateCLI
>>> cls.main(cmdline, **kw)
```

`kwcoco.cli.coco_validate._CLI`

alias of `CocoValidateCLI`

2.1.1.2 Module contents

2.1.1.2 kwcoco.data package

2.1.1.2.1 Submodules

2.1.1.2.1.1 kwcoco.data.grab_camvid module

Downloads the CamVid data if necessary, and converts it to COCO.

`kwcoco.data.grab_camvid._devcheck_sample_full_image()`

`kwcoco.data.grab_camvid._devcheck_load_sub_image()`

`kwcoco.data.grab_camvid.grab_camvid_train_test_val_splits(coco_dset, mode='segnet')`

`kwcoco.data.grab_camvid.grab_camvid_sampler()`

Grab a kwcoco.CocoSampler object for the CamVid dataset.

Returns

`sampler`

Return type

`kwcoco.CocoSampler`

Example

```
>>> # xdoctest: +REQUIRES(--download)
>>> sampler = grab_camvid_sampler()
>>> print('sampler = {!r}'.format(sampler))
>>> # sampler.load_sample()
>>> for gid in ub.ProgIter(sampler.image_ids, desc='load image'):
>>>     img = sampler.load_image(gid)
```

`kwcoco.data.grab_camvid.grab_coco_camvid()`

Example

```
>>> # xdoctest: +REQUIRES(--download)
>>> dset = grab_coco_camvid()
>>> print('dset = {!r}'.format(dset))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> plt = kwplot.autopl()
>>> plt.clf()
>>> dset.show_image(gid=1)
```

`kwcoco.data.grab_camvid.grab_raw_camvid()`

Grab the raw camvid data.

`kwcoco.data.grab_camvid.rgb_to_cid(r, g, b)`

`kwcoco.data.grab_camvid.cid_to_rgb(cid)`

`kwcoco.data.grab_camvid.convert_camvid_raw_to_coco(camvid_raw_info)`

Converts the raw camvid format to an MSCOCO based format, (which lets use use kwcoco's COCO backend).

Example

```
>>> # xdoctest: +REQUIRES(--download)
>>> camvid_raw_info = grab_raw_camvid()
>>> # test with a reduced set of data
>>> del camvid_raw_info['img_paths'][2:]
>>> del camvid_raw_info['mask_paths'][2:]
>>> dset = convert_camvid_raw_to_coco(camvid_raw_info)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> plt = kwplot.autopl()
>>> kwplot.figure(fnum=1, pnum=(1, 2, 1))
>>> dset.show_image(gid=1)
>>> kwplot.figure(fnum=1, pnum=(1, 2, 2))
>>> dset.show_image(gid=2)
```

`kwcoco.data.grab_camvid._define_camvid_class_hierarchy(dset)`

`kwcoco.data.grab_camvid.main()`

Dump the paths to the coco file to stdout

By default these will go to in the path:

`~/cache/kwcoco/camvid/camvid-master`

The four files will be:

| | | |
|--|---|--|
| <code>~/cache/kwcoco/camvid/camvid-master/camvid-full.mscoco.json</code> | <code>~/cache/kwcoco/camvid/camvid-master/camvid-train.mscoco.json</code> | <code>~/cache/kwcoco/camvid/camvid-master/camvid-vali.mscoco.json</code> |
| <code>~/cache/kwcoco/camvid/camvid-master/camvid-test.mscoco.json</code> | | |

2.1.1.2.1.2 kwcoco.data.grab_cifar module

2.1.1.2.1.3 kwcoco.data.grab_datasets module

Todo:

- [] UCF101 - Action Recognition Data Set - <https://www.crcv.ucf.edu/data/UCF101.php>
 - [] HMDB: a large human motion database - <https://serre-lab.clps.brown.edu/resource/hmdb-a-large-human-motion-database/>
 - [] <https://paperswithcode.com/dataset/imagenet>
 - [] <https://paperswithcode.com/dataset/coco>
 - [] <https://paperswithcode.com/dataset/fashion-mnist>
 - [] <https://paperswithcode.com/dataset/visual-question-answering>
 - [] <https://paperswithcode.com/dataset/lfw>
 - [] <https://paperswithcode.com/dataset/lsun>
 - [] <https://paperswithcode.com/dataset/ava>
 - [] <https://paperswithcode.com/dataset/activitynet>
 - [] <https://paperswithcode.com/dataset/clevr>
-

2.1.1.2.1.4 kwcoco.data.grab_domainnet module

References

<http://ai.bu.edu/M3SDA/#dataset>

`kwcoco.data.grab_domainnet.grab_domain_net()`

Todo:

- [] Allow the user to specify the download directory, generalize this pattern across the data grab scripts.
-

2.1.1.2.1.5 kwcoco.data.grab_spacenet module

References

<https://medium.com/the-downline/the-spacenet-7-multi-temporal-urban-development-challenge-algorithmic-baseline-4515ec9bd9fe>
<https://arxiv.org/pdf/2102.11958.pdf> <https://spacenet.ai/sn7-challenge/>

`kwcoco.data.grab_spacenet.grab_spacenet7(data_dpath)`

References

<https://spacenet.ai/sn7-challenge/>

Requires:

awscli

`kwcoco.data.grab_spacenet.convert_spacenet_to_kwcoco(extract_dpath, coco_fpath)`

Converts the raw SpaceNet7 dataset to kwcoco

Note:

- The “train” directory contains 60 “videos” representing a region over time.
- **Each “video” directory contains :**
 - images - unmasked images
 - images_masked - images with masks applied
 - labels - geojson polys in wgs84?
 - labels_match - geojson polys in wgs84 with track ids?
 - labels_match_pix - geojson polys in pixels with track ids?
 - UDM_masks - unusable data masks (binary data corresponding with an image, may not exist)

File names appear like:

“global_monthly_2018_01_mosaic_L15-1538E-1163N_6154_3539_13”

`kwcoco.data.grab_spacenet.main()`

2.1.1.2.1.6 kwcoco.data.grab_voc module

`kwcoco.data.grab_voc.__torrent_voc()`

Requires:

pip install deluge pip install python-libtorrent-bin

References

<https://academictorrents.com/details/f6ddac36ac7ae2ef79dc72a26a065b803c9c7230>

Todo:

- [] Is there a pythonic way to download a torrent programatically?
-

`kwcoco.data.grab_voc.convert_voc_to_coco(dpath=None)`

`kwcoco.data.grab_voc._convert_voc_split(devkit_dpath, classes, split, year, root)`

split, year = ‘train’, 2012 split, year = ‘train’, 2007

`kwcoco.data.grab_voc._read_split_paths(devkit_dpath, split, year)`

split = ‘train’ self = VOCdataset(‘test’) year = 2007 year = 2012

`kwcoco.data.grab_voc.ensure_voc_data(dpath=None, force=False, years=[2007, 2012])`

Download the Pascal VOC data if it does not already exist.

Note:

- [] These URLs seem to be dead
-

Example

```
>>> # xdoctest: +REQUIRES(--download)
>>> devkit_dpath = ensure_voc_data()
```

`kwcoco.data.grab_voc.ensure_voc_coco(dpath=None)`

Download the Pascal VOC data and convert it to coco, if it does exit.

Parameters

`dpath (str | None)` – download directory. Defaults to “~/data/VOC”.

Returns

mapping from dataset tags to coco file paths.

The original datasets have keys prefixed with underscores. The standard splits keys are train, vali, and test.

Return type

`Dict[str, str]`

`kwcoco.data.grab_voc.main()`

2.1.1.2.2 Module contents

2.1.1.3 kwcoco.demo package

2.1.1.3.1 Submodules

2.1.1.3.1.1 kwcoco.demo.boids module

`class kwcoco.demo.boids.Boids(num, dims=2, rng=None, **kwargs)`

Bases: `NiceRepr`

Efficient numpy based backend for generating boid positions.

BOID = bird-oid object

References

<https://www.youtube.com/watch?v=mhjuuHl6qHM> <https://medium.com/better-programming/boids-simulating-birds-flock-behavior-in-python-9fff99375118> <https://en.wikipedia.org/wiki/Boids>

Example

```
>>> from kwcoco.demo.boids import * # NOQA
>>> num_frames = 10
>>> num_objects = 3
>>> rng = None
>>> self = Boids(num=num_objects, rng=rng).initialize()
>>> paths = self.paths(num_frames)
>>> #
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> plt = kwplot.autoplty()
>>> from mpl_toolkits.mplot3d import Axes3D # NOQA
>>> ax = plt.gca(projection='3d')
>>> ax.cla()
>>> #
>>> for path in paths:
>>>     time = np.arange(len(path))
>>>     ax.plot(time, path.T[0] * 1, path.T[1] * 1, ',-')
>>> ax.set_xlim(0, num_frames)
>>> ax.set_ylim(-.01, 1.01)
>>> ax.set_zlim(-.01, 1.01)
>>> ax.set_xlabel('time')
>>> ax.set_ylabel('u-pos')
>>> ax.set_zlabel('v-pos')
>>> kwplot.show_if_requested()
```

import xdev _ = xdev.profile_now(self.compute_forces()) _ = xdev.profile_now(self.update_neighbors())

Example

```
>>> # Test determinism
>>> from kwcoco.demo.boids import * # NOQA
>>> num_frames = 2
>>> num_objects = 1
>>> rng = 4532
>>> self = Boids(num=num_objects, rng=rng).initialize()
>>> #print(ub.hash_data(self.pos))
>>> #print(ub.hash_data(self.vel))
>>> #print(ub.hash_data(self.acc))
>>> tocheck = []
>>> for i in range(100):
>>>     self = Boids(num=num_objects, rng=rng).initialize()
>>>     self.step()
>>>     self.step()
>>>     self.step()
```

(continues on next page)

(continued from previous page)

```
>>>     tocheck.append(self.pos.copy())
>>> assert ub.allsame(list(map(ub.hash_data, tocheck)))
```

initialize()**update_neighbors()****compute_forces()****boundary_conditions()****step()**

Update positions, velocities, and accelerations

paths(num_steps)kwcoc.demo.boids.**clamp_mag**(vec, mag, axis=None)

vec = np.random.rand(10, 2) mag = 1.0 axis = 1 new_vec = clamp_mag(vec, mag, axis) np.linalg.norm(new_vec, axis=axis)

kwcoc.demo.boids.**triu_condense_multi_index**(multi_index, dims, symmetric=False)

Like np.ravel_multi_index but returns positions in an upper triangular condensed square matrix

Examples

multi_index (Tuple[ArrayLike]):

indexes for each dimension into the square matrix

dims (Tuple[int]):

shape of each dimension in the square matrix (should all be the same)

symmetric (bool):

if True, converts lower triangular indices to their upper triangular location. This may cause a copy to occur.

References

<https://stackoverflow.com/a/36867493/887074> https://numpy.org/doc/stable/reference/generated/numpy.ravel_multi_index.html#numpy.ravel_multi_index

Examples

```
>>> dims = (3, 3)
>>> symmetric = True
>>> multi_index = (np.array([0, 0, 1]), np.array([1, 2, 2]))
>>> condensed_idxs = triu_condense_multi_index(multi_index, dims, symmetric=symmetric)
>>> assert condensed_idxs.tolist() == [0, 1, 2]
```

```
>>> n = 7
>>> symmetric = True
>>> multi_index = np.triu_indices(n=n, k=1)
>>> condensed_idxs = triu_condense_multi_index(multi_index, [n] * 2, ↴
    ↴symmetric=symmetric)
```

(continues on next page)

(continued from previous page)

```
>>> assert condensed_idxs.tolist() == list(range(n * (n - 1) // 2))
>>> from scipy.spatial.distance import pdist, squareform
>>> square_mat = np.zeros((n, n))
>>> condens_mat = squareform(square_mat)
>>> condens_mat[condensed_idxs] = np.arange(len(condensed_idxs)) + 1
>>> square_mat = squareform(condens_mat)
>>> print('square_mat =\n{}'.format(ub.urepr(square_mat, nl=1)))
```

```
>>> n = 7
>>> symmetric = True
>>> multi_index = np.tril_indices(n=n, k=-1)
>>> condensed_idxs = triu_condense_multi_index(multi_index, [n] * 2, ↴
    ↪symmetric=symmetric)
>>> assert sorted(condensed_idxs.tolist()) == list(range(n * (n - 1) // 2))
>>> from scipy.spatial.distance import pdist, squareform
>>> square_mat = np.zeros((n, n))
>>> condens_mat = squareform(square_mat, checks=False)
>>> condens_mat[condensed_idxs] = np.arange(len(condensed_idxs)) + 1
>>> square_mat = squareform(condens_mat)
>>> print('square_mat =\n{}'.format(ub.urepr(square_mat, nl=1)))
```

`kwcocoo.demo.boids._spatial_index_scratch()`

`kwcocoo.demo.boids.closest_point_on_line_segment(pts, e1, e2)`

Finds the closet point from p on line segment (e1, e2)

Parameters

- `pts (ndarray)` – xy points [Nx2]
- `e1 (ndarray)` – the first xy endpoint of the segment
- `e2 (ndarray)` – the second xy endpoint of the segment

Returns

`pt_on_seg` - the closest xy point on (e1, e2) from ptp

Return type

`ndarray`

References

http://en.wikipedia.org/wiki/Distance_from_a_point_to_a_line <http://stackoverflow.com/questions/849211/shortest-distance-between-a-point-and-a-line-segment>

Example

```
>>> # ENABLE_DOCTEST
>>> from kwcoco.demo.boids import * # NOQA
>>> verts = np.array([[ 21.83012702,  13.16987298],
>>>                   [ 16.83012702,  21.83012702],
>>>                   [ 8.16987298,  16.83012702],
>>>                   [ 13.16987298,   8.16987298],
>>>                   [ 21.83012702,  13.16987298]])
>>> rng = np.random.RandomState(0)
>>> pts = rng.rand(64, 2) * 20 + 5
>>> e1, e2 = verts[0:2]
>>> closest_point_on_line_segment(pts, e1, e2)
```

kwcoco.demo.boids._pygame_render_boids()

Fast and responsive BOID rendering. This is an easter egg.

Requirements:

pip install pygame

CommandLine

```
python -m kwcoco.demo.boids
pip install pygame kwcoco -U && python -m kwcoco.demo.boids
```

kwcoco.demo.boids._yeah_boid()

2.1.1.3.1.2 kwcoco.demo.perterb module

kwcoco.demo.perterb.perterb_coco(coco_dset, **kwargs)


Perterbs a coco dataset

Parameters

- **rng** (*int, default=0*)
- **box_noise** (*int, default=0*)
- **cls_noise** (*int, default=0*)
- **null_pred** (*bool, default=False*)
- **with_probs** (*bool, default=False*)
- **score_noise** (*float, default=0.2*)
- **hacked** (*int, default=1*)

Example

```
>>> from kwcoco.demo.perterb import * # NOQA
>>> from kwcoco.demo.perterb import _demo_construct_probs
>>> import kwcoco
>>> coco_dset = true_dset = kwcoco.CocoDataset.demo('shapes2')
>>> kwargs = {
>>>     'box_noise': 0.5,
>>>     'n_fp': 3,
>>>     'with_probs': 1,
>>>     'with_heatmaps': 1,
>>> }
>>> pred_dset = perterb_coco(true_dset, **kwargs)
>>> pred_dset._check_json_serializable()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> gid = 1
>>> canvas = true_dset.delayed_load(gid).finalize()
>>> canvas = true_dset.annots(gid=gid).detections.draw_on(canvas, color='green')
>>> canvas = pred_dset.annots(gid=gid).detections.draw_on(canvas, color='blue')
>>> kwplot.imshow(canvas)
```

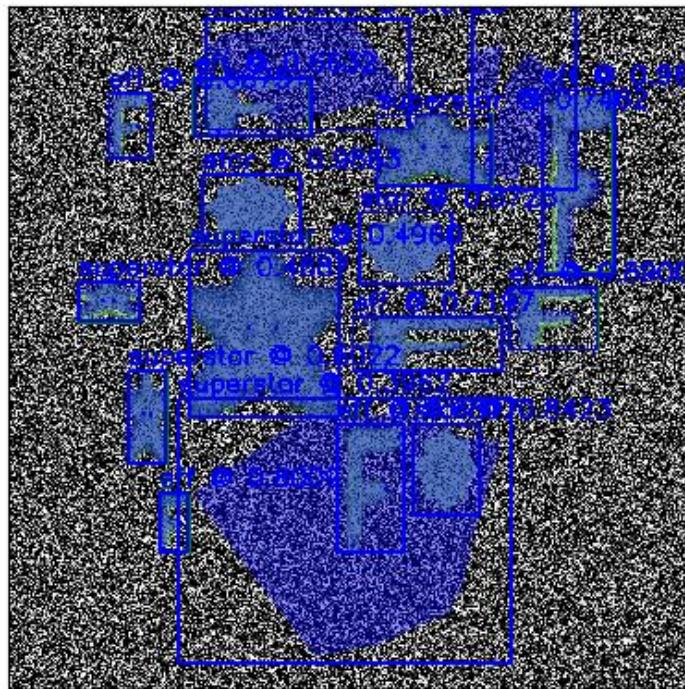

`kwcoco.demo.perterb._demo_construct_probs(pred_cxs, pred_scores, classes, rng, hacked=1)`

Constructs random probabilities for demo data

Example

```
>>> import kwcoco
>>> import kwarray
>>> rng = kwarray.ensure_rng(0)
>>> classes = kwcoco.CategoryTree.coerce(10)
>>> hacked = 1
>>> pred_cxs = rng.randint(0, 10, 10)
>>> pred_scores = rng.rand(10)
>>> probs = _demo_construct_probs(pred_cxs, pred_scores, classes, rng, hacked)
>>> probs.sum(axis=1)
```

2.1.1.3.1.3 kwcoco.demo.toydata module

Generates “toydata” for demo and testing purposes.

Note: The implementation of `demodata_toy_img` and `demodata_toy_dset` should be redone using the tools built for `random_video_dset`, which have more extensible implementations.

`kwcoco.demo.toydata.demodata_toy_dset(image_size=(600, 600), n_imgs=5, verbose=3, rng=0, newstyle=True, dpath=None, fpath=None, bundle_dpath=None, aux=None, use_cache=True, **kwargs)`

Create a toy detection problem

Parameters

- **image_size** (`Tuple[int, int]`) – The width and height of the generated images
- **n_imgs** (`int`) – number of images to generate
- **rng** (`int | RandomState | None`) – random number generator or seed. Defaults to 0.
- **newstyle** (`bool`) – create newstyle kwcoco data. default=True
- **dpath** (`str | PathLike | None`) – path to the directory that will contain the bundle, (defaults to a kwcoco cache dir). Ignored if `bundle_dpath` is given.
- **fpath** (`str | PathLike | None`) – path to the kwcoco file. The parent will be the bundle if it is not specified. Should be a descendant of the dpath if specified.
- **bundle_dpath** (`str | PathLike | None`) – path to the directory that will store images. If specified, dpath is ignored. If unspecified, a bundle will be written inside `dpath`.
- **aux** (`bool | None`) – if True generates dummy auxiliary channels
- **verbose** (`int`) – verbosity mode. default=3
- **use_cache** (`bool`) – if True caches the generated json in the `dpath`. Default=True
- ****kwargs** – used for old backwards compatible argument names gsize - alias for `image_size`

Return type

`kwcoco.CocoDataset`

SeeAlso:

`random_video_dset`

CommandLine

```
xdoctest -m kwcoco.demo.toydata_image demodata_toy_dset --show
```

Todo:

- [] Non-homogeneous images sizes
-


Example

```
>>> from kwcoco.demo.toydata_image import *
>>> import kwcoco
>>> dset = demodata_toy_dset(image_size=(300, 300), aux=True, use_cache=False)
>>> # xdoctest: +REQUIRES(--show)
>>> print(ub.urepr(dset.dataset, nl=2))
>>> import kwplot
>>> kwplot.autompl()
>>> dset.show_image(gid=1)
>>> ub.startfile(dset.bundle_dpath)
```

dset._tree()

```
>>> from kwcoco.demo.toydata_image import *
>>> import kwcoco
```

```
cs/.cache/kwcoco/demodata_bundles/shapes_5_gjnxqrhunjrzxt/_assets/images/
```

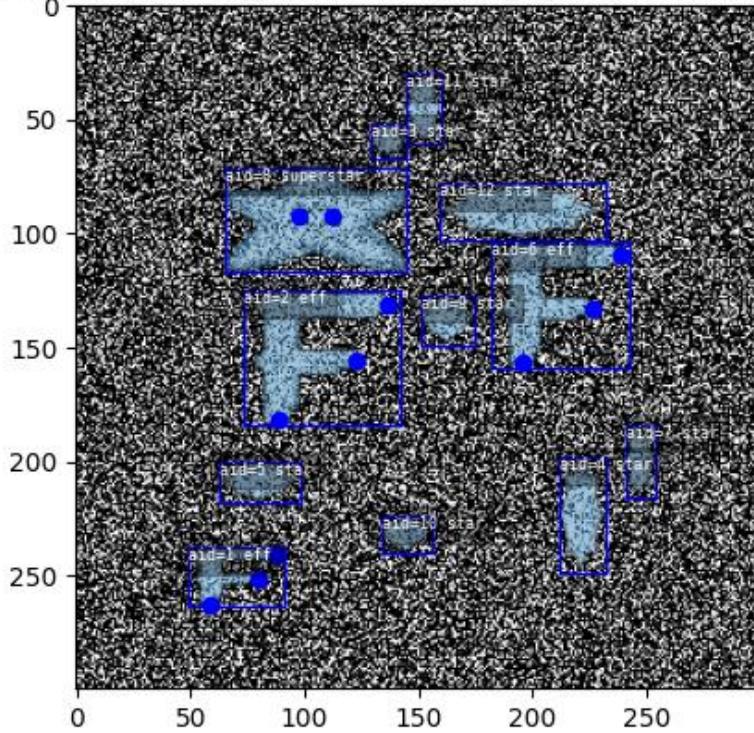

```
dset = demodata_toy_dset(image_size=(300, 300), aux=True, use_cache=False) print(dset.imgs[1]) dset._tree()  
dset = demodata_toy_dset(image_size=(300, 300), aux=True, use_cache=False,  
    bundle_dpath='test_bundle')  
print(dset.imgs[1]) dset._tree()  
dset = demodata_toy_dset(  
    image_size=(300, 300), aux=True, use_cache=False, dpath='test_cache_dpath')  
kwcoco.demo.toydata.random_single_video_dset(image_size=(600, 600), num_frames=5, num_tracks=3,  
    tid_start=1, gid_start=1, video_id=1, anchors=None,  
    rng=None, render=False, dpath=None, autobuild=True,  
    verbose=3, aux=None, multispectral=False,  
    max_speed=0.01, channels=None, multisensor=False,  
    **kwargs)
```

Create the video scene layout of object positions.

Note: Does not render the data unless specified.

Parameters

- **image_size** (*Tuple[int, int]*) – size of the images
- **num_frames** (*int*) – number of frames in this video
- **num_tracks** (*int*) – number of tracks in this video

- **tid_start** (*int*) – track-id start index, default=1
- **gid_start** (*int*) – image-id start index, default=1
- **video_id** (*int*) – video-id of this video, default=1
- **anchors** (*ndarray | None*) – base anchor sizes of the object boxes we will generate.
- **rng** (*RandomState | None | int*) – random state / seed
- **render** (*bool | dict*) – if truthy, does the rendering according to provided params in the case of dict input.
- **autobuild** (*bool*) – prebuild coco lookup indexes, default=True
- **verbose** (*int*) – verbosity level
- **aux** (*bool | None | List[str]*) – if specified generates auxiliary channels
- **multispectral** (*bool*) – if specified simulates multispectral imagery This is similar to aux, but has no “main” file.
- **max_speed** (*float*) – max speed of movers
- **channels** (*str | None | kwcoco.ChannelSpec*) – if specified generates multispectral images with dummy channels
- **multisensor** (*bool*) –
if True, generates demodata from “multiple sensors”, in
other words, observations may have different “bands”.
- ****kwargs** – used for old backwards compatible argument names gsize - alias for image_size

Todo:

- [] Need maximum allowed object overlap measure
- [] Need better parameterized path generation

Example



```
>>> import numpy as np
>>> from kwcoco.demo.toydata_video import random_single_video_dset
>>> anchors = np.array([ [0.3, 0.3], [0.1, 0.1] ])
>>> dset = random_single_video_dset(render=True, num_frames=5,
>>>                               num_tracks=3, anchors=anchors,
>>>                               max_speed=0.2, rng=91237446)
>>> # xdoctest: +REQUIRES(--show)
>>> # Show the tracks in a single image
>>> import kwplot
>>> import kwimage
>>> #kwplot.autosns()
>>> kwplot.autoplt()
>>> # Group track boxes and centroid locations
>>> paths = []
>>> track_boxes = []
>>> for tid, aids in dset.index.trackid_to_aids.items():
```

(continues on next page)

(continued from previous page)

```
>>> boxes = dset.annots(aids).boxes.to_cxywh()
>>> path = boxes.data[:, 0:2]
>>> paths.append(path)
>>> track_boxes.append(boxes)
>>> # Plot the tracks over time
>>> ax = kwplot.figure(fnum=1, doclf=1).gca()
>>> colors = kwimage.Color.distinct(len(track_boxes))
>>> for i, boxes in enumerate(track_boxes):
>>>     color = colors[i]
>>>     path = boxes.data[:, 0:2]
>>>     boxes.draw(color=color, centers={'radius': 0.01}, alpha=0.8)
>>>     ax.plot(path.T[0], path.T[1], 'x-', color=color)
>>> ax.invert_yaxis()
>>> ax.set_title('Track locations flattened over time')
>>> # Plot the image sequence
>>> fig = kwplot.figure(fnum=2, doclf=1)
>>> gids = list(dset.imgs.keys())
>>> pnums = kwplot.PlotNums(nRows=1, nSubplots=len(gids))
>>> for gid in gids:
>>>     dset.show_image(gid, pnum=pnums(), fnum=2, title=f'Image {gid}', show_aid=0,
>>>     setlim='image')
>>> fig.suptitle('Video Frames')
>>> fig.set_size_inches(15.4, 4.0)
>>> fig.tight_layout()
>>> kwplot.show_if_requested()
```

Track locations flattened over time

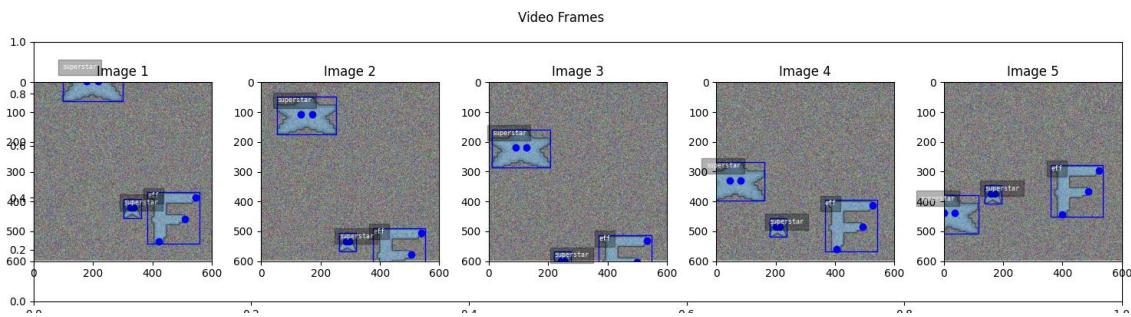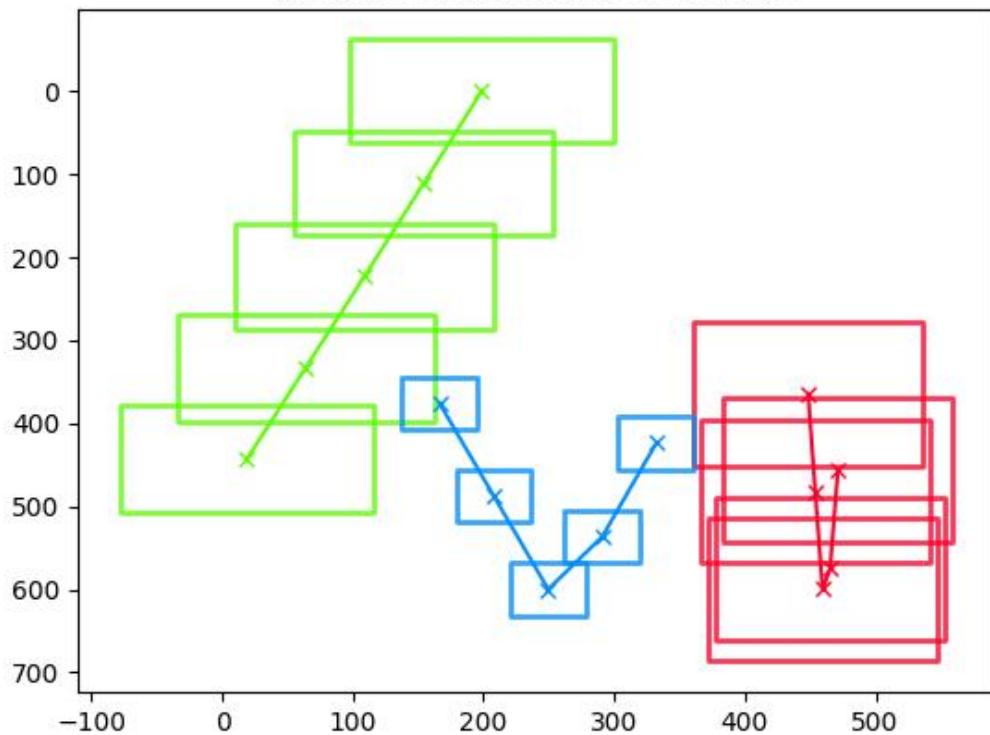


Example

```
>>> from kwCOCO.demo.toydata_video import * # NOQA
>>> anchors = np.array([ [0.2, 0.2], [0.1, 0.1] ])
>>> gsize = np.array([(600, 600)])
>>> print(anchors * gsize)
>>> dset = random_single_video_dset(render=True, num_frames=10,
>>>                               anchors=anchors, num_tracks=10,
>>>                               image_size='random')
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> plt = kwplot.autoplot()
>>> plt.clf()
```

(continues on next page)

(continued from previous page)

```
>>> gids = list(dset.imgs.keys())
>>> pnums = kwplot.PlotNums(nSubplots=len(gids))
>>> for gid in gids:
>>>     dset.show_image(gid, pnum=pnums(), fnum=1, title=f'Image {gid}')
>>> kwplot.show_if_requested()
```

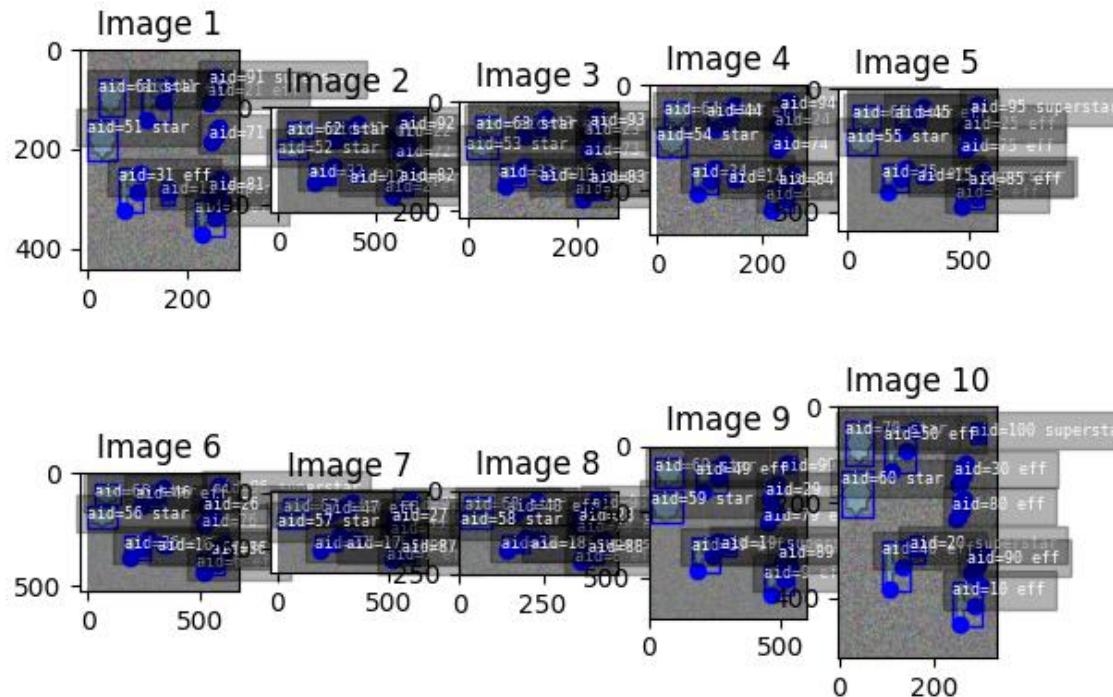

Example


```
>>> from kwcoc.demo.toydata_video import * # NOQA
>>> dset = random_single_video_dset(num_frames=10, num_tracks=10, aux=True)
>>> assert 'auxiliary' in dset.imgs[1]
>>> assert dset.imgs[1]['auxiliary'][0]['channels']
>>> assert dset.imgs[1]['auxiliary'][1]['channels']
```

Example

```
>>> from kwCOCO.demo.toydata_video import * # NOQA
>>> multispectral = True
>>> dset = random_single_video_dset(num_frames=1, num_tracks=1, multispectral=True)
>>> dset._check_json_serializable()
>>> dset.dataset['images']
>>> assert dset.imgs[1]['auxiliary'][1]['channels']
>>> # test that we can render
>>> render_toy_dataset(dset, rng=0, dpath=None, renderkw={})
```

Example

```
>>> from kwCOCO.demo.toydata_video import * # NOQA
>>> dset = random_single_video_dset(num_frames=4, num_tracks=1, multispectral=True, ...
>>>     multisensor=True, image_size='random', rng=2338)
>>> dset._check_json_serializable()
>>> assert dset.imgs[1]['auxiliary'][1]['channels']
>>> # Print before and after render
>>> #print('multisensor-images = {}'.format(ub.urepr(dset.dataset['images'], nl=-2)))
>>> #print('multisensor-images = {}'.format(ub.urepr(dset.dataset, nl=-2)))
>>> print(ub.hash_data(dset.dataset))
>>> # test that we can render
>>> render_toy_dataset(dset, rng=0, dpath=None, renderkw={})
>>> #print('multisensor-images = {}'.format(ub.urepr(dset.dataset['images'], nl=-2)))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> from kwCOCO.demo.toydata_video import _draw_video_sequence # NOQA
>>> gids = [1, 2, 3, 4]
>>> final = _draw_video_sequence(dset, gids)
>>> print('dset.fpath = {!r}'.format(dset.fpath))
>>> kwplot.imshow(final)
```

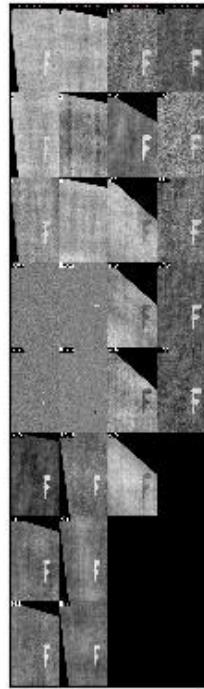

```
kwcoco.demo.toydata.random_video_dset(num_videos=1, num_frames=2, num_tracks=2, anchors=None,  
image_size=(600, 600), verbose=3, render=False, aux=None,  
multispectral=False, multisensor=False, rng=None, dpath=None,  
max_speed=0.01, channels=None, background='noise', **kwargs)
```

Create a toy Coco Video Dataset

Parameters

- **num_videos** (*int*) – number of videos
- **num_frames** (*int*) – number of images per video
- **num_tracks** (*int*) – number of tracks per video
- **image_size** (*Tuple[int, int]*) – The width and height of the generated images
- **render** (*bool | dict*) – if truthy the toy annotations are synthetically rendered. See `render_toy_image()` for details.
- **rng** (*int | None | RandomState*) – random seed / state
- **dpath** (*str | PathLike | None*) – only used if render is truthy, place to write rendered images.
- **verbose** (*int*) – verbosity mode, default=3
- **aux** (*bool | None*) – if True generates dummy auxiliary / asset channels
- **multispectral** (*bool*) – similar to aux, but does not have the concept of a “main” image.
- **max_speed** (*float*) – max speed of movers
- **channels** (*str | None*) – experimental new way to get MSI with specific band distributions.

- ****kwargs** – used for old backwards compatible argument names gsize - alias for image_size


SeeAlso:

`random_single_video_dset`

Example


```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> dset = random_video_dset(render=True, num_videos=3, num_frames=2,
>>>                               num_tracks=5, image_size=(128, 128))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> dset.show_image(1, doclf=True)
>>> dset.show_image(2, doclf=True)
```

```
>>> from kwcoco.demo.toydata_video import * # NOQA
dset = random_video_dset(render=False, num_videos=3, num_frames=2,
    num_tracks=10)
dset._tree()
dset.imgs[1]
```

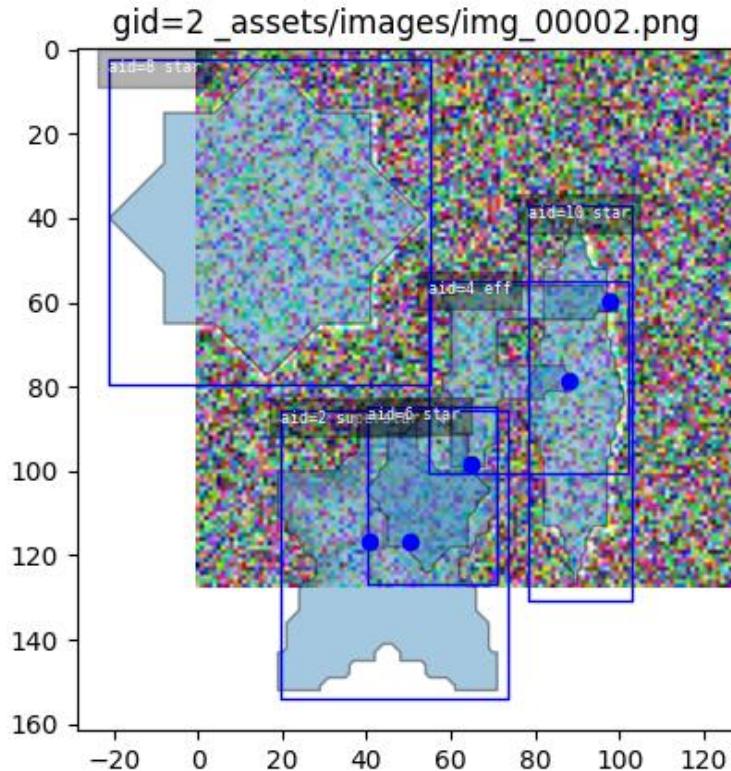

Example

```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> # Test small images
>>> dset = random_video_dset(render=True, num_videos=1, num_frames=1,
>>>                      num_tracks=1, image_size=(2, 2))
>>> ann = dset.annots().peek()
>>> print('ann = {}'.format(ub.urepr(ann, nl=2)))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> dset.show_image(1, doclf=True)
```

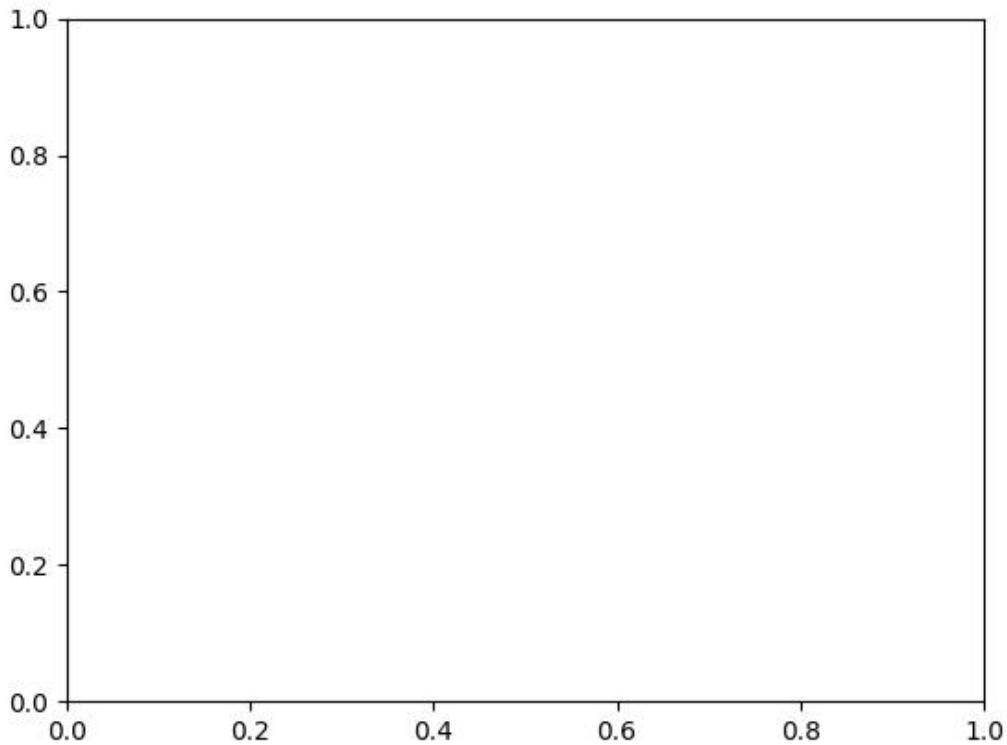

`kwcoco.demo.toydata.demodata_toy_img(anchors=None, image_size=(104, 104), categories=None, n_annot=(0, 50), fg_scale=0.5, bg_scale=0.8, bg_intensity=0.1, fg_intensity=0.9, gray=True, centerobj=None, exact=False, newstyle=True, rng=None, aux=None, **kwargs)`

Generate a single image with non-overlapping toy objects of available categories.

Todo:

DEPRECATE IN FAVOR OF

`random_single_video_dset + render_toy_image`

Parameters

- **anchors** (*ndarray | None*) – Nx2 base width / height of boxes
- **gsize** (*Tuple[int, int]*) – width / height of the image
- **categories** (*List[str] | None*) – list of category names
- **n_annot** (*Tuple | int*) – controls how many annotations are in the image. if it is a tuple, then it is interpreted as uniform random bounds
- **fg_scale** (*float*) – standard deviation of foreground intensity
- **bg_scale** (*float*) – standard deviation of background intensity
- **bg_intensity** (*float*) – mean of background intensity
- **fg_intensity** (*float*) – mean of foreground intensity
- **centerobj** (*bool | None*) – if ‘pos’, then the first annotation will be in the center of the image, if ‘neg’, then no annotations will be in the center.
- **exact** (*bool*) – if True, ensures that exactly the number of specified annots are generated.
- **newstyle** (*bool*) – use new-style kwcoco format
- **rng** (*RandomState | int | None*) – the random state used to seed the process
- **aux** (*bool | None*) – if specified builds auxiliary channels
- ****kwargs** – used for old backwards compatible argument names. gsize - alias for image_size

CommandLine

```
xdoctest -m kwcoco.demo.toydata_image demodata_toy_img:0 --profile
xdoctest -m kwcoco.demo.toydata_image demodata_toy_img:1 --show
```

Example

```
>>> from kwcoco.demo.toydata_image import * # NOQA
>>> img, anns = demodata_toy_img(image_size=(32, 32), anchors=[[.3, .3]], rng=0)
>>> img['imdata'] = '<ndarray shape={}>'.format(img['imdata'].shape)
>>> print('img = {}'.format(ub.urepr(img)))
>>> print('anns = {}'.format(ub.urepr(anns, nl=2, cbr=True)))
>>> # xdoctest: +IGNORE_WANT
img = {
    'height': 32,
    'imdata': '<ndarray shape=(32, 32, 3)>',
    'width': 32,
}
anns = [{`bbox`: [15, 10, 9, 8],
          'category_name': 'star',
          'keypoints': [],
          'segmentation': {'counts': '[`06j0000020N1000e8', 'size': [32, 32]},},
          `bbox`: [11, 20, 7, 7],
          'category_name': 'star',
          'keypoints': [],
          'segmentation': {'counts': 'g;1m04N0020N102L[=', 'size': [32, 32]},},}
```



(continues on next page)

(continued from previous page)

```
{'bbox': [4, 4, 8, 6],
 'category_name': 'superstar',
 'keypoints': [{keypoint_category': 'left_eye', 'xy': [7.25, 6.8125]}, {'keypoint_category': 'right_eye', 'xy': [8.75, 6.8125]}],
 'segmentation': {'counts': 'U4210j0300001010000MV00ed0', 'size': [32, 32]}, },
{'bbox': [3, 20, 6, 7],
 'category_name': 'star',
 'keypoints': [],
 'segmentation': {'counts': 'g31m04N000002L[f0', 'size': [32, 32]}, }, ]
```


Example

```
>>> # xdoctest: +REQUIRES(--show)
>>> img, anns = demodata_toy_img(image_size=(172, 172), rng=None, aux=True)
>>> print('anns = {}'.format(ub.urepr(anns, nl=1)))
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(img['imdata'], pnum=(1, 2, 1), fnum=1)
>>> auxdata = img['auxiliary'][0]['imdata']
>>> kwplot.imshow(auxdata, pnum=(1, 2, 2), fnum=1)
>>> kwplot.show_if_requested()
```

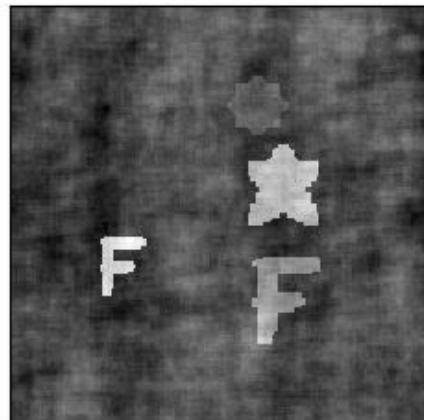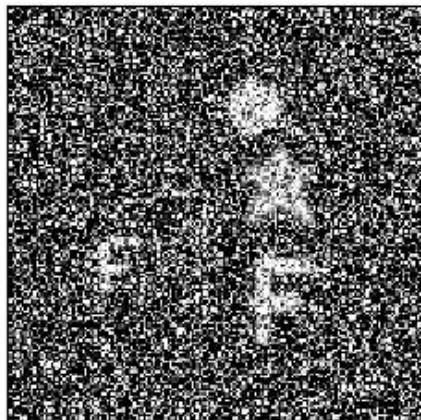

Example

```
>>> # xdoctest: +REQUIRES(--show)
>>> img, anns = demodata_toy_img(image_size=(172, 172), rng=None, aux=True)
>>> print('anns = {}'.format(ub.urepr(anns, nl=1)))
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(img['imdata'], pnum=(1, 2, 1), fnum=1)
>>> auxdata = img['auxiliary'][0]['imdata']
>>> kwplot.imshow(auxdata, pnum=(1, 2, 2), fnum=1)
>>> kwplot.show_if_requested()
```

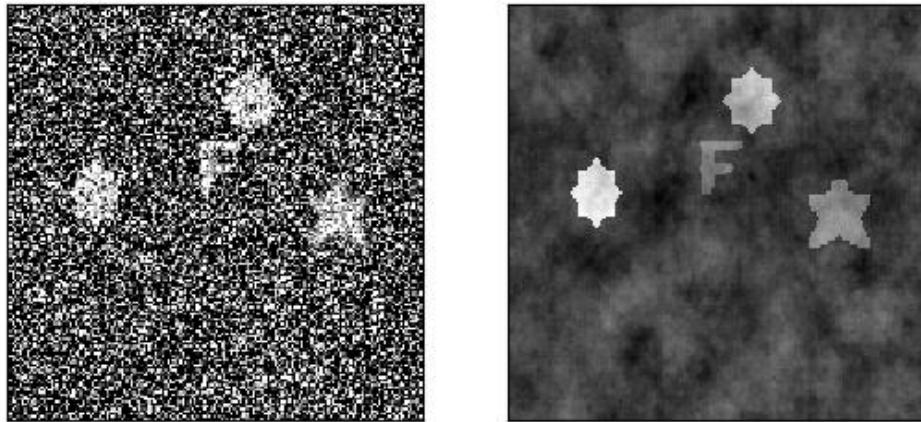

2.1.1.3.1.4 kwcoco.demo.toydata_image module

Generates “toydata” for demo and testing purposes.

Loose image version of the toydata generators.

Note: The implementation of `demodata_toy_img` and `demodata_toy_dset` should be redone using the tools built for `random_video_dset`, which have more extensible implementations.

```
kwcoco.demo.toydata_image.demodata_toy_dset(image_size=(600, 600), n_imgs=5, verbose=3, rng=0,
                                              newstyle=True, dpath=None, fpath=None,
                                              bundle_dpath=None, aux=None, use_cache=True,
                                              **kwargs)
```

Create a toy detection problem

Parameters

- **image_size** (*Tuple[int, int]*) – The width and height of the generated images
- **n_imgs** (*int*) – number of images to generate
- **rng** (*int | RandomState | None*) – random number generator or seed. Defaults to 0.
- **newstyle** (*bool*) – create newstyle kwcoco data. default=True
- **dpath** (*str | PathLike | None*) – path to the directory that will contain the bundle, (defaults to a kwcoco cache dir). Ignored if *bundle_dpath* is given.
- **fpath** (*str | PathLike | None*) – path to the kwcoco file. The parent will be the bundle if it is not specified. Should be a descendant of the *dpath*.
- **bundle_dpath** (*str | PathLike | None*) – path to the directory that will store images. If specified, *dpath* is ignored. If unspecified, a bundle will be written inside *dpath*.
- **aux** (*bool | None*) – if True generates dummy auxiliary channels
- **verbose** (*int*) – verbosity mode. default=3
- **use_cache** (*bool*) – if True caches the generated json in the *dpath*. Default=True
- ****kwargs** – used for old backwards compatible argument names gsize - alias for image_size

Return type

kwcoco.CocoDataset

SeeAlso:

[random_video_dset](#)

CommandLine

```
xdoctest -m kwcoco.demo.toydata_image demodata_toy_dset --show
```

Todo:

- [] Non-homogeneous images sizes
-

Example

```
>>> from kwcoco.demo.toydata_image import *
>>> import kwcoco
>>> dset = demodata_toy_dset(image_size=(300, 300), aux=True, use_cache=False)
>>> # xdoctest: +REQUIRES(--show)
>>> print(ub.urepr(dset.dataset, nl=2))
>>> import kwplot
>>> kwplot.autompl()
```

(continues on next page)


(continued from previous page)

```
>>> dset.show_image(gid=1)
>>> ub.startfile(dset.bundle_dpath)
```

```
dset._tree()
```

```
>>> from kwCOCO.demo.toydata_image import *
>>> import kwCOCO
```

cs/.cache/kwCOCO/demodata_bundles/shapes_5_gjnxqrhunjrzxt/_assets/images/00000000000000000000000000000000.jpg

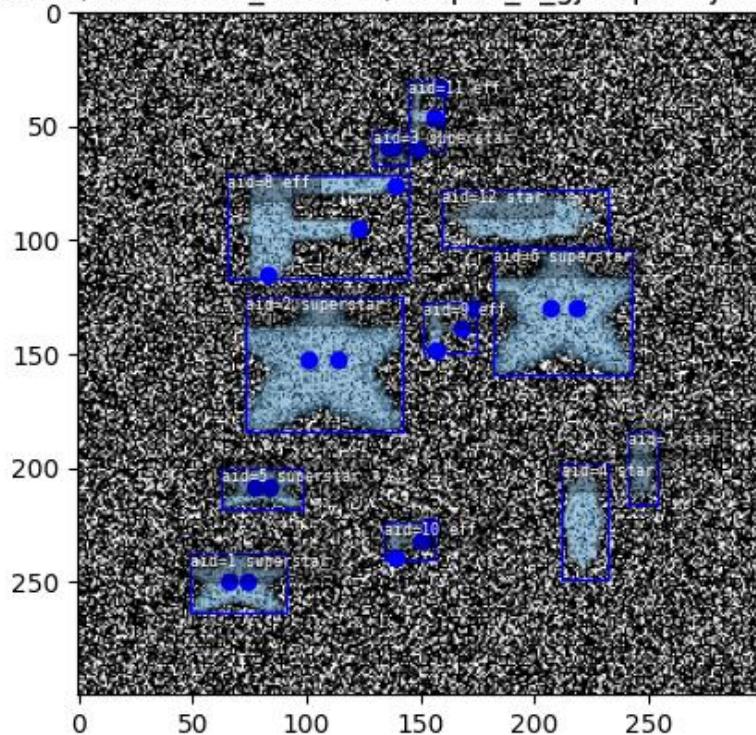

```
dset = demodata_toy_dset(image_size=(300, 300), aux=True, use_cache=False) print(dset.imgs[1]) dset._tree()
dset = demodata_toy_dset(image_size=(300, 300), aux=True, use_cache=False,
                        bundle_dpath='test_bundle')
print(dset.imgs[1]) dset._tree()
dset = demodata_toy_dset(
    image_size=(300, 300), aux=True, use_cache=False, dpath='test_cache_dpath')
kwCOCO.demo.toydata_image.demodata_toy_img(anchors=None, image_size=(104, 104), categories=None,
                                             n_annots=(0, 50), fg_scale=0.5, bg_scale=0.8,
                                             bg_intensity=0.1, fg_intensity=0.9, gray=True,
                                             centerobj=None, exact=False, newstyle=True, rng=None,
                                             aux=None, **kwargs)
```

Generate a single image with non-overlapping toy objects of available categories.

Todo:

DEPRECATE IN FAVOR OFrandom_single_video_dset + render_toy_image

Parameters

- **anchors** (*ndarray* | *None*) – Nx2 base width / height of boxes
- **gsize** (*Tuple[int, int]*) – width / height of the image
- **categories** (*List[str]* | *None*) – list of category names
- **n_annot** (*Tuple* | *int*) – controls how many annotations are in the image. if it is a tuple, then it is interpreted as uniform random bounds
- **fg_scale** (*float*) – standard deviation of foreground intensity
- **bg_scale** (*float*) – standard deviation of background intensity
- **bg_intensity** (*float*) – mean of background intensity
- **fg_intensity** (*float*) – mean of foreground intensity
- **centerobj** (*bool* | *None*) – if ‘pos’, then the first annotation will be in the center of the image, if ‘neg’, then no annotations will be in the center.
- **exact** (*bool*) – if True, ensures that exactly the number of specified annots are generated.
- **newstyle** (*bool*) – use new-style kwCOCO format
- **rng** (*RandomState* | *int* | *None*) – the random state used to seed the process
- **aux** (*bool* | *None*) – if specified builds auxiliary channels
- ****kwargs** – used for old backwards compatible argument names. gsize - alias for image_size

CommandLine

```
xdoctest -m kwCOCO.demo.toydata_image demodata_toy_img:0 --profile  
xdoctest -m kwCOCO.demo.toydata_image demodata_toy_img:1 --show
```

Example

```
>>> from kwCOCO.demo.toydata_image import * # NOQA  
>>> img, anns = demodata_toy_img(image_size=(32, 32), anchors=[[.3, .3]], rng=0)  
>>> img['imdata'] = '<ndarray shape={}>'.format(img['imdata'].shape)  
>>> print('img = {}'.format(ub.urepr(img)))  
>>> print('anns = {}'.format(ub.urepr(anns, nl=2, cbr=True)))  
>>> # xdoctest: +IGNORE_WANT  
img = {  
    'height': 32,  
    'imdata': '<ndarray shape=(32, 32, 3)>',  
    'width': 32,  
}  
anns = [{  
    'bbox': [15, 10, 9, 8],  
    'category_name': 'star',  
    'keypoints': [],  
    'segmentation': {'counts': '[`06j0000020N1000e8', 'size': [32, 32]},  
},
```


(continues on next page)

(continued from previous page)

```
{'bbox': [11, 20, 7, 7],
 'category_name': 'star',
 'keypoints': [],
 'segmentation': {'counts': 'g;1m04N0020N102L[=', 'size': [32, 32]},},
{'bbox': [4, 4, 8, 6],
 'category_name': 'superstar',
 'keypoints': [{'keypoint_category': 'left_eye', 'xy': [7.25, 6.8125]}, {'keypoint_
category': 'right_eye', 'xy': [8.75, 6.8125]}],
 'segmentation': {'counts': 'U4210j0300001010000MV00ed0', 'size': [32, 32]},},
{'bbox': [3, 20, 6, 7],
 'category_name': 'star',
 'keypoints': [],
 'segmentation': {'counts': 'g31m04N000002L[f0', 'size': [32, 32]},},]
```


Example

```
>>> # xdoctest: +REQUIRES(--show)
>>> img, anns = demodata_toy_img(image_size=(172, 172), rng=None, aux=True)
>>> print('anns = {}'.format(ub.urepr(anns, nl=1)))
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.imshow(img['imdata'], pnum=(1, 2, 1), fnum=1)
>>> auxdata = img['auxiliary'][0]['imdata']
>>> kwplot.imshow(auxdata, pnum=(1, 2, 2), fnum=1)
>>> kwplot.show_if_requested()
```

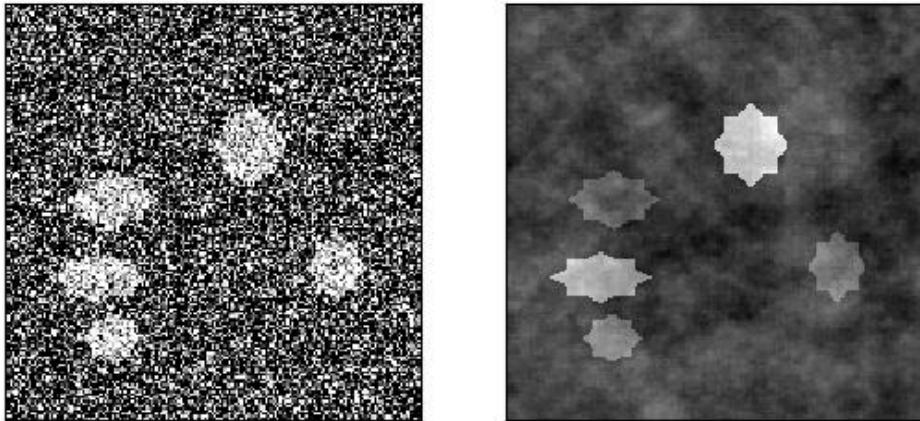

Example

```
>>> # xdoctest: +REQUIRES(--show)
>>> img, anns = demodata_toy_img(image_size=(172, 172), rng=None, aux=True)
>>> print('anns = {}'.format(ub.urepr(anns, nl=1)))
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.imshow(img['imdata'], pnum=(1, 2, 1), fnum=1)
>>> auxdata = img['auxiliary'][0]['imdata']
>>> kwplot.imshow(auxdata, pnum=(1, 2, 2), fnum=1)
>>> kwplot.show_if_requested()
```

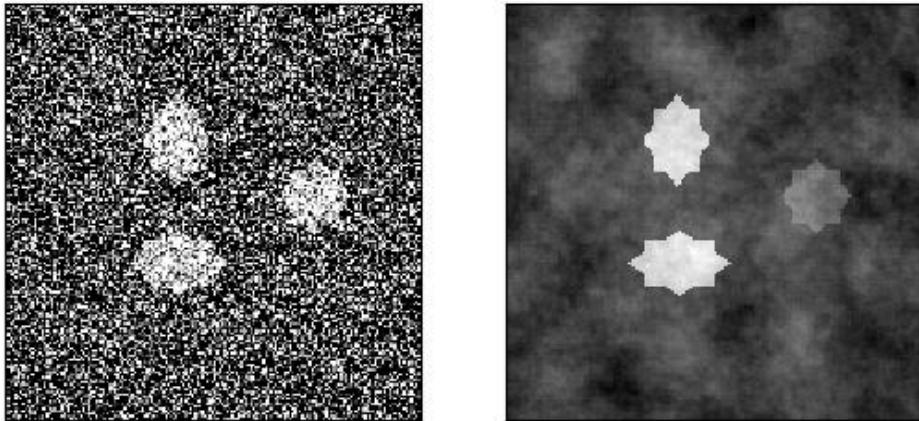

2.1.1.3.1.5 kwcoco.demo.toydata_video module

Generates “toydata” for demo and testing purposes.

This is the video version of the toydata generator and should be preferred to the loose image version in `toydata_image`.

```
kwcoco.demo.toydata_video.random_video_dset(num_videos=1, num_frames=2, num_tracks=2,
                                             anchors=None, image_size=(600, 600), verbose=3,
                                             render=False, aux=None, multispectral=False,
                                             multisensor=False, rng=None, dpath=None,
                                             max_speed=0.01, channels=None, background='noise',
                                             **kwargs)
```

Create a toy Coco Video Dataset

Parameters

- `num_videos` (`int`) – number of videos
- `num_frames` (`int`) – number of images per video
- `num_tracks` (`int`) – number of tracks per video
- `image_size` (`Tuple[int, int]`) – The width and height of the generated images
- `render` (`bool | dict`) – if truthy the toy annotations are synthetically rendered. See [`render_toy_image\(\)`](#) for details.
- `rng` (`int | None | RandomState`) – random seed / state

- **dpath** (*str | PathLike | None*) – only used if render is truthy, place to write rendered images.
- **verbose** (*int*) – verbosity mode, default=3
- **aux** (*bool | None*) – if True generates dummy auxiliary / asset channels
- **multispectral** (*bool*) – similar to aux, but does not have the concept of a “main” image.
- **max_speed** (*float*) – max speed of movers
- **channels** (*str | None*) – experimental new way to get MSI with specific band distributions.
- ****kwargs** – used for old backwards compatible argument names gsize - alias for image_size


SeeAlso:

`random_single_video_dset`

Example


```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> dset = random_video_dset(render=True, num_videos=3, num_frames=2,
>>>                      num_tracks=5, image_size=(128, 128))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> dset.show_image(1, doclf=True)
>>> dset.show_image(2, doclf=True)
```

```
>>> from kwcoco.demo.toydata_video import * # NOQA
dset = random_video_dset(render=False, num_videos=3, num_frames=2,
    num_tracks=10)
dset._tree()
dset.imgs[1]
```

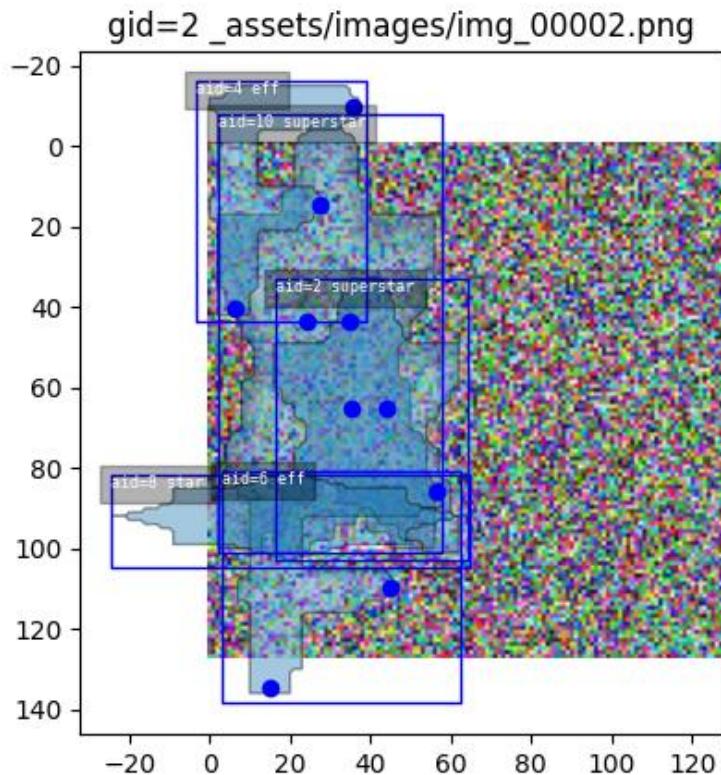

Example

```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> # Test small images
>>> dset = random_video_dset(render=True, num_videos=1, num_frames=1,
>>>                         num_tracks=1, image_size=(2, 2))
>>> ann = dset.annots().peek()
>>> print('ann = {}'.format(ub.urepr(ann, nl=2)))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> dset.show_image(1, doclf=True)
```

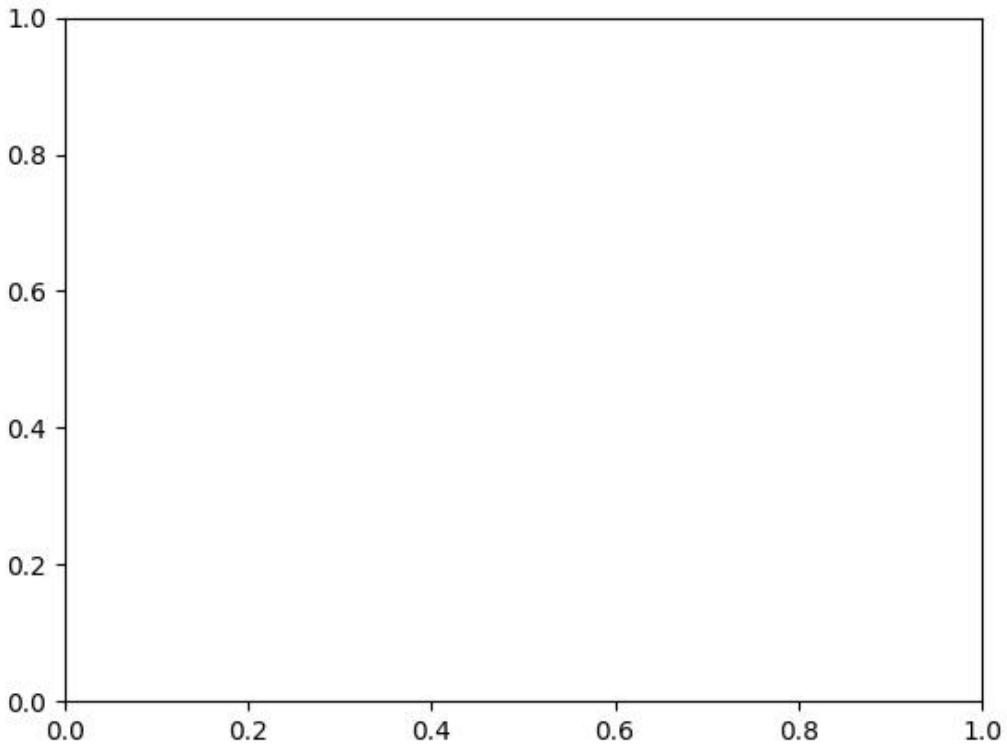

```
kwCOCO.demo.toydata_video.random_single_video_dset(image_size=(600, 600), num_frames=5,  
num_tracks=3, tid_start=1, gid_start=1,  
video_id=1, anchors=None, rng=None,  
render=False, dpath=None, autobuild=True,  
verbose=3, aux=None, multispectral=False,  
max_speed=0.01, channels=None,  
multisensor=False, **kwargs)
```

Create the video scene layout of object positions.

Note: Does not render the data unless specified.

Parameters

- **image_size** (*Tuple[int, int]*) – size of the images
- **num_frames** (*int*) – number of frames in this video
- **num_tracks** (*int*) – number of tracks in this video
- **tid_start** (*int*) – track-id start index, default=1
- **gid_start** (*int*) – image-id start index, default=1
- **video_id** (*int*) – video-id of this video, default=1
- **anchors** (*ndarray | None*) – base anchor sizes of the object boxes we will generate.
- **rng** (*RandomState | None | int*) – random state / seed

- **render** (*bool | dict*) – if truthy, does the rendering according to provided params in the case of dict input.
- **autobuild** (*bool*) – prebuild coco lookup indexes, default=True
- **verbose** (*int*) – verbosity level
- **aux** (*bool | None | List[str]*) – if specified generates auxiliary channels
- **multispectral** (*bool*) – if specified simulates multispectral imagery This is similar to aux, but has no “main” file.
- **max_speed** (*float*) – max speed of movers
- **channels** (*str | None | kwcoco.ChannelSpec*) – if specified generates multispectral images with dummy channels
- **multisensor** (*bool*) –
if True, generates demodata from “multiple sensors”, in
other words, observations may have different “bands”.
- ****kwargs** – used for old backwards compatible argument names gsize - alias for image_size

Todo:

- [] Need maximum allowed object overlap measure
- [] Need better parameterized path generation

Example


```
>>> import numpy as np
>>> from kwcoco.demo.toydata_video import random_single_video_dset
>>> anchors = np.array([[0.3, 0.3], [0.1, 0.1]])
>>> dset = random_single_video_dset(render=True, num_frames=5,
>>>                               num_tracks=3, anchors=anchors,
>>>                               max_speed=0.2, rng=91237446)
>>> # xdoctest: +REQUIRES(--show)
>>> # Show the tracks in a single image
>>> import kwplot
>>> import kwimage
>>> #kwplot.autosns()
>>> kwplot.autoplt()
>>> # Group track boxes and centroid locations
>>> paths = []
>>> track_boxes = []
>>> for tid, aids in dset.index.trackid_to_aids.items():
>>>     boxes = dset.annots(aids).boxes.to_cxywh()
>>>     path = boxes.data[:, 0:2]
>>>     paths.append(path)
>>>     track_boxes.append(boxes)
>>> # Plot the tracks over time
>>> ax = kwplot.figure(fnum=1, doclf=1).gca()
>>> colors = kwimage.Color.distinct(len(track_boxes))
>>> for i, boxes in enumerate(track_boxes):
```


(continues on next page)

(continued from previous page)

```
>>> color = colors[i]
>>> path = boxes.data[:, 0:2]
>>> boxes.draw(color=color, centers={'radius': 0.01}, alpha=0.8)
>>> ax.plot(path.T[0], path.T[1], 'x-', color=color)
>>> ax.invert_yaxis()
>>> ax.set_title('Track locations flattened over time')
>>> # Plot the image sequence
>>> fig = kwplot.figure(fnum=2, doclf=1)
>>> gids = list(dset.imgs.keys())
>>> pnums = kwplot.PlotNums(nRows=1, nSubplots=len(gids))
>>> for gid in gids:
>>>     dset.show_image(gid, pnum=pnums(), fnum=2, title=f'Image {gid}', show_aid=0,
>>>     setlim='image')
>>> fig.suptitle('Video Frames')
>>> fig.set_size_inches(15.4, 4.0)
>>> fig.tight_layout()
>>> kwplot.show_if_requested()
```


Track locations flattened over time

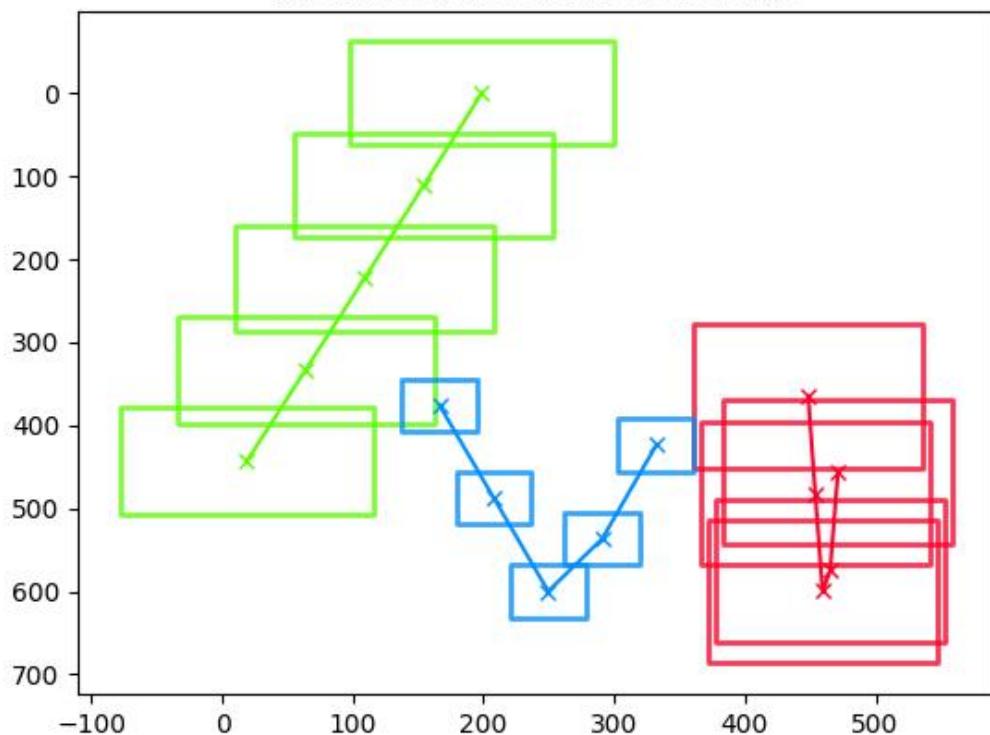

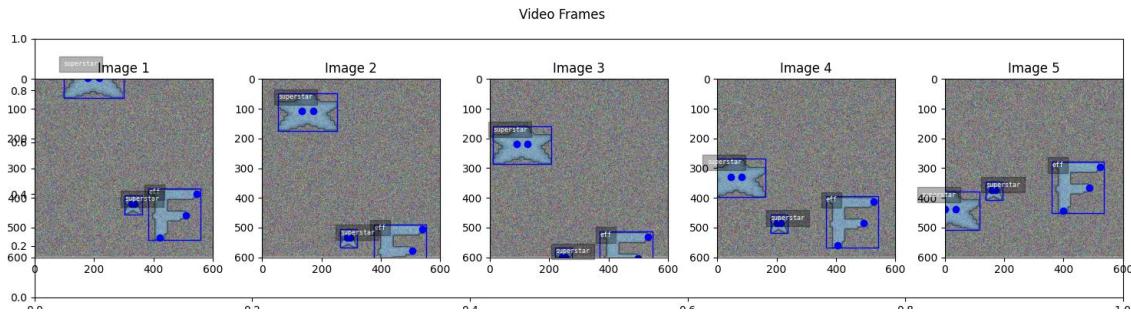

Example

```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> anchors = np.array([ [0.2, 0.2], [0.1, 0.1]] )
>>> gsize = np.array([(600, 600)])
>>> print(anchors * gsize)
>>> dset = random_single_video_dset(render=True, num_frames=10,
>>>                               anchors=anchors, num_tracks=10,
>>>                               image_size='random')
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> plt = kwplot.autoplt()
>>> plt.clf()
>>> gids = list(dset.imgs.keys())
>>> pnums = kwplot.PlotNums(nSubplots=len(gids))
>>> for gid in gids:
>>>     dset.show_image(gid, pnum=pnums(), fnum=1, title=f'Image {gid}')
>>> kwplot.show_if_requested()
```

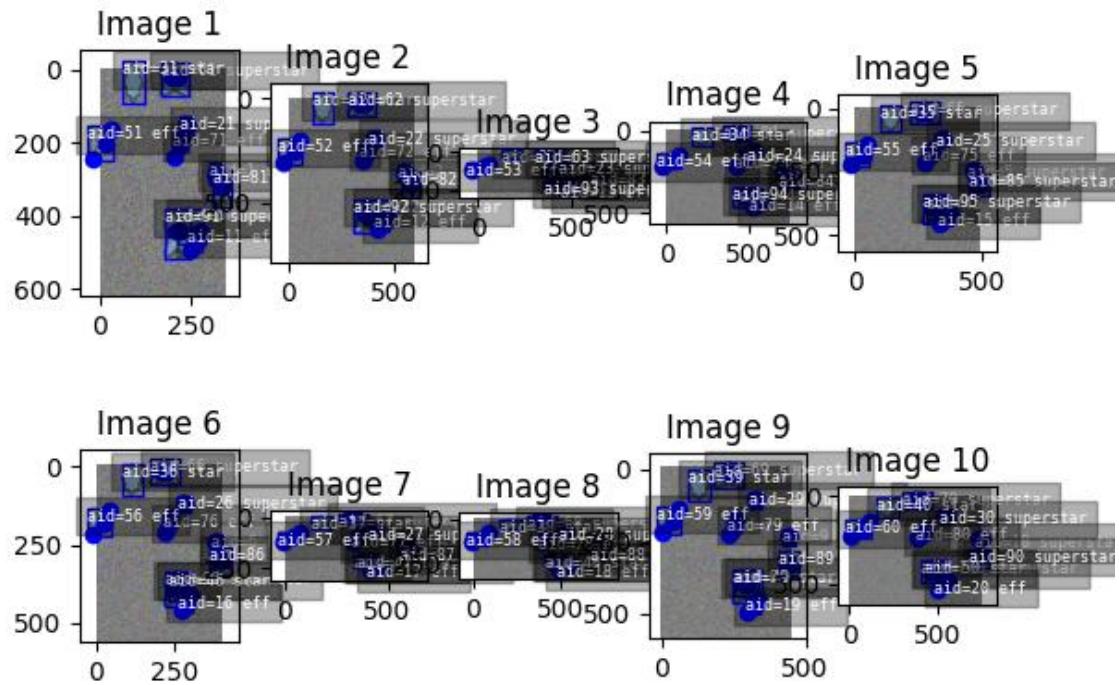

Example


```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> dset = random_single_video_dset(num_frames=10, num_tracks=10, aux=True)
>>> assert 'auxiliary' in dset.imgs[1]
>>> assert dset.imgs[1]['auxiliary'][0]['channels']
>>> assert dset.imgs[1]['auxiliary'][1]['channels']
```

Example

```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> multispectral = True
>>> dset = random_single_video_dset(num_frames=1, num_tracks=1, multispectral=True)
>>> dset._check_json_serializable()
>>> dset.dataset['images']
>>> assert dset.imgs[1]['auxiliary'][1]['channels']
>>> # test that we can render
>>> render_toy_dataset(dset, rng=0, dpath=None, renderkw={})
```

Example

```
>>> from kwCOCO.demo.toydata_video import * # NOQA
>>> dset = random_single_video_dset(num_frames=4, num_tracks=1, multispectral=True, ↴
    ↵multisensor=True, image_size='random', rng=2338)
>>> dset._check_json_serializable()
>>> assert dset.imgs[1]['auxiliary'][1]['channels']
>>> # Print before and after render
>>> #print('multisensor-images = {}'.format(ub.urepr(dset.dataset['images'], nl=-2)))
>>> #print('multisensor-images = {}'.format(ub.urepr(dset.dataset, nl=-2)))
>>> print(ub.hash_data(dset.dataset))
>>> # test that we can render
>>> render_toy_dataset(dset, rng=0, dpath=None, renderkw={})
>>> #print('multisensor-images = {}'.format(ub.urepr(dset.dataset['images'], nl=-2)))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> from kwCOCO.demo.toydata_video import _draw_video_sequence # NOQA
>>> gids = [1, 2, 3, 4]
>>> final = _draw_video_sequence(dset, gids)
>>> print('dset.fpath = {!r}'.format(dset.fpath))
>>> kwplot.imshow(final)
```

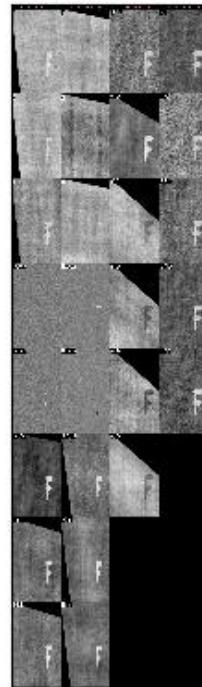

`kwCOCO.demo.toydata_video._draw_video_sequence(dset, gids)`

Helper to draw a multi-sensor sequence

`kwcoco.demo.toydata_video.render_toy_dataset(dset, rng, dpath=None, renderkw=None, verbose=0)`

Create toydata_video renderings for a preconstructed coco dataset.

Parameters

- **dset** (*kwcoco.CocoDataset*) – A dataset that contains special “renderable” annotations. (e.g. the demo shapes). Each image can contain special fields that influence how an image will be rendered.


Currently this process is simple, it just creates a noisy image with the shapes superimposed over where they should exist as indicated by the annotations. In the future this may become more sophisticated.

Each item in *dset.dataset['images']* will be modified to add the “file_name” field indicating where the rendered data is written.

- **rng** (*int | None | RandomState*) – random state
- **dpath** (*str | PathLike | None*) – The location to write the images to. If unspecified, it is written to the rendered folder inside the kwcoco cache directory.
- **renderkw** (*dict | None*) – See [*render_toy_image\(\)*](#) for details. Also takes imwrite keywords args only handled in this function. TODO better docs.

Example

```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> import kwarray
>>> rng = None
>>> rng = kwarray.ensure_rng(rng)
>>> num_tracks = 3
>>> dset = random_video_dset(rng=rng, num_videos=3, num_frames=5,
>>>                           num_tracks=num_tracks, image_size=(128, 128))
>>> dset = render_toy_dataset(dset, rng)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> plt = kwplot.autoplt()
>>> plt.clf()
>>> gids = list(dset.imgs.keys())
>>> pnums = kwplot.PlotNums(nSubplots=len(gids), nRows=num_tracks)
>>> for gid in gids:
>>>     dset.show_image(gid, pnum=pnums(), fnum=1, title=False)
>>> pnums = kwplot.PlotNums(nSubplots=len(gids))
```

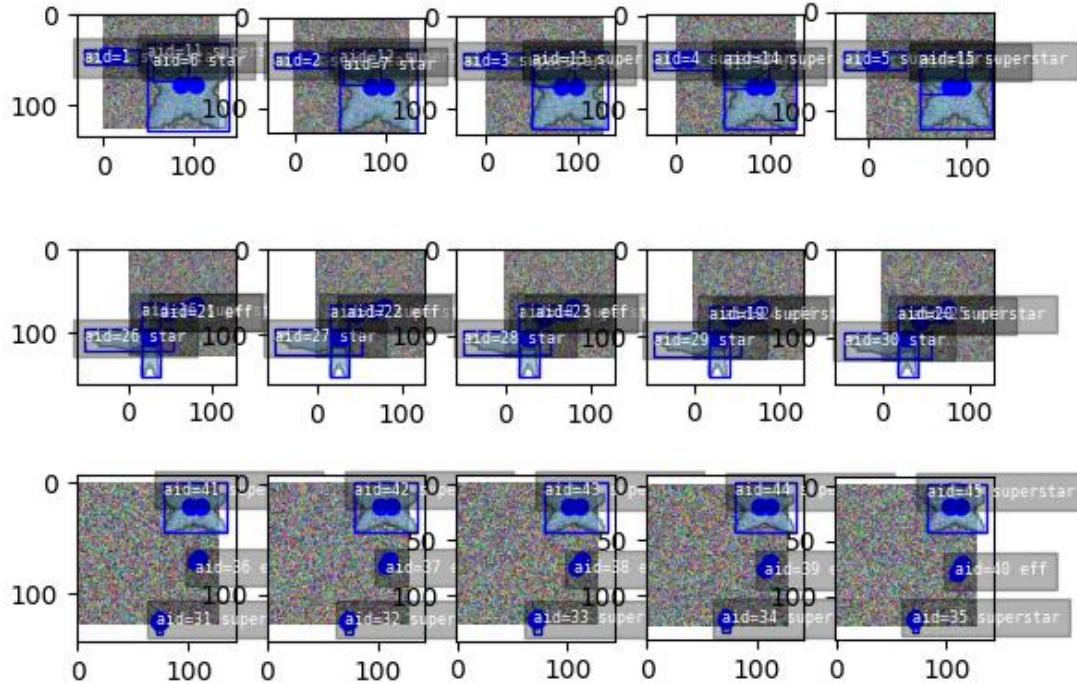

`kwCOCO.demo.toydata_video.render_toy_image(dset, gid, rng=None, renderkw=None)`

Modifies dataset inplace, rendering synthetic annotations.

This does not write to disk. Instead this writes to placeholder values in the image dictionary.

Parameters

- **dset** (*kwCOCO.CocoDataset*) – coco dataset with renderable annotations / images
- **gid** (*int*) – image to render
- **rng** (*int | None | RandomState*) – random state
- **renderkw** (*dict | None*) – rendering config gray (bool): gray or color images fg_scale (float): foreground noisiness (gauss std) bg_scale (float): background noisiness (gauss std) fg_intensity (float): foreground brightness (gauss mean) bg_intensity (float): background brightness (gauss mean) newstyle (bool): use new kwCOCO datastructure formats with_kpts (bool): include keypoint info with_sseg (bool): include segmentation info

Returns

the inplace-modified image dictionary

Return type


Dict

Example

```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> image_size=(600, 600)
>>> num_frames=5
>>> verbose=3
>>> rng = None
>>> import kwarray
>>> rng = kwarray.ensure_rng(rng)
>>> aux = 'mx'
>>> dset = random_single_video_dset(
>>>     image_size=image_size, num_frames=num_frames, verbose=verbose, aux=aux, ↴
>>>     rng=rng)
>>> print('dset.dataset = {}'.format(ub.urepr(dset.dataset, nl=2)))
>>> gid = 1
>>> renderkw = {}
>>> renderkw['background'] = 'parrot'
>>> render_toy_image(dset, gid, rng, renderkw=renderkw)
>>> img = dset.imgs[gid]
>>> canvas = img['imdata']
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.imshow(canvas, doclf=True, pnum=(1, 2, 1))
>>> dets = dset.annots(gid=gid).detections
>>> dets.draw()
```

```
>>> auxdata = img['auxiliary'][0]['imdata']
>>> aux_canvas = false_color(auxdata)
>>> kwplot.imshow(aux_canvas, pnum=(1, 2, 2))
>>> _ = dets.draw()
```

```
>>> # xdoctest: +REQUIRES(--show)
>>> img, anns = demodata_toy_img(image_size=(172, 172), rng=None, aux=True)
>>> print('anns = {}'.format(ub.urepr(anns, nl=1)))
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.imshow(img['imdata'], pnum=(1, 2, 1), fnum=1)
>>> auxdata = img['auxiliary'][0]['imdata']
>>> kwplot.imshow(auxdata, pnum=(1, 2, 2), fnum=1)
>>> kwplot.show_if_requested()
```

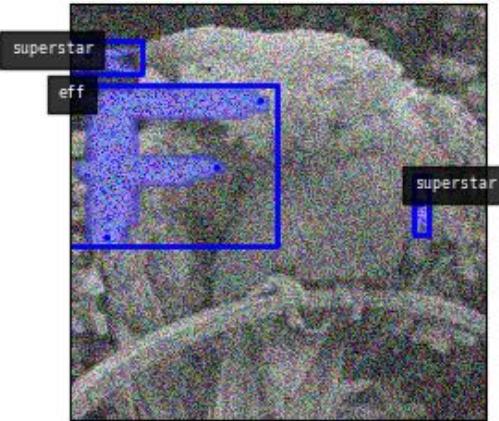

Example

```
>>> from kwCOCO.demo.toydata_video import * # NOQA
>>> multispectral = True
>>> dset = random_single_video_dset(num_frames=1, num_tracks=1, multispectral=True)
>>> gid = 1
>>> dset.imgs[gid]
>>> rng = kwarray.ensure_rng(0)
>>> renderkw = {'with_sseg': True}
>>> img = render_toy_image(dset, gid, rng=rng, renderkw=renderkw)
```

`kwCOCO.demo.toydata_video.render_foreground(imdata, chan_to_auxinfo, dset, annots, catpats, with_sseg, with_kpts, dims, newstyle, gray, rng)`

Renders demo annotations on top of a demo background

`kwCOCO.demo.toydata_video.render_background(img, rng, gray, bg_intensity, bg_scale, imgspace_background=None)`

`kwCOCO.demo.toydata_video.false_color(twochan)`

TODO: the function ensure_false_color will eventually be ported to kwimage use that instead.

`kwCOCO.demo.toydata_video.random_multi_object_path(num_objects, num_frames, rng=None, max_speed=0.01)`

`kwcoco.demo.toydata_video.random_path(num, degree=1, dimension=2, rng=None, mode='boid')`

Create a random path using a somem ethod curve.

Parameters


- **num** (*int*) – number of points in the path
- **degree** (*int*) – degree of curvieness of the path, default=1
- **dimension** (*int*) – number of spatial dimensions, default=2
- **mode** (*str*) – can be boid, walk, or bezier
- **rng** (*RandomState* | *None* | *int*) – seed, default=None

References

<https://github.com/dhermes/bezier>

Example

```
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> num = 10
>>> dimension = 2
>>> degree = 3
>>> rng = None
>>> path = random_path(num, degree, dimension, rng, mode='boid')
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> plt = kwplot.autoplt()
>>> kwplot.multi_plot(xdata=path[:, 0], ydata=path[:, 1], fnum=1, doclf=1, xlim=(0, ↵
    ↵1), ylim=(0, 1))
>>> kwplot.show_if_requested()
```

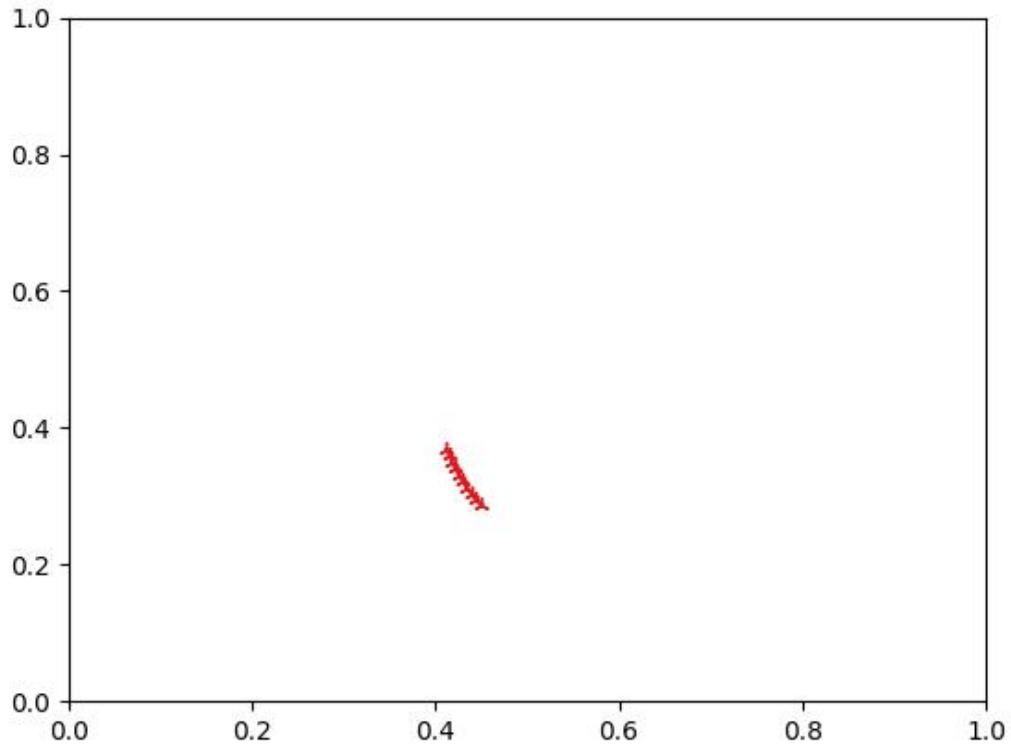

Example

```
>>> # xdoctest: +REQUIRES(--3d)
>>> # xdoctest: +REQUIRES(module:bezier)
>>> import kwarray
>>> import kwplot
>>> plt = kwplot.autoplt()
>>> #
>>> num= num_frames = 100
>>> rng = kwarray.ensure_rng(0)
>>> #
>>> from kwcoco.demo.toydata_video import * # NOQA
>>> paths = []
>>> paths.append(random_path(num, degree=3, dimension=3, mode='bezier'))
>>> paths.append(random_path(num, degree=2, dimension=3, mode='bezier'))
>>> paths.append(random_path(num, degree=4, dimension=3, mode='bezier'))
>>> #
>>> from mpl_toolkits.mplot3d import Axes3D # NOQA
>>> ax = plt.gca(projection='3d')
>>> ax.cla()
>>> #
>>> for path in paths:
>>>     time = np.arange(len(path))
```

(continues on next page)

(continued from previous page)

```
>>>     ax.plot(time, path.T[0] * 1, path.T[1] * 1, 'o-')
>>> ax.set_xlim(0, num_frames)
>>> ax.set_ylim(-.01, 1.01)
>>> ax.set_zlim(-.01, 1.01)
>>> ax.set_xlabel('x')
>>> ax.set_ylabel('y')
>>> ax.set_zlabel('z')
```


2.1.1.3.1.6 kwcoco.demo.toypatterns module

```
class kwcoco.demo.toypatterns.CategoryPatterns(categories=None, fg_scale=0.5, fg_intensity=0.9,
                                                rng=None)
```

Bases: object

Example

```
>>> from kwcoco.demo.toypatterns import * # NOQA
>>> self = CategoryPatterns.coerce()
>>> chip = np.zeros((100, 100, 3))
>>> offset = (20, 10)
>>> dims = (160, 140)
>>> info = self.random_category(chip, offset, dims)
>>> print('info = {}'.format(ub.repr(info, nl=1)))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(info['data'], pnum=(1, 2, 1), fnum=1, title='chip-space')
>>> kpts = kwimage.Points._from_coco(info['keypoints'])
>>> kpts.translate(-np.array(offset)).draw(radius=3)
>>> #####
>>> mask = kwimage.Mask.coerce(info['segmentation'])
>>> kwplot.imshow(mask.to_c_mask().data, pnum=(1, 2, 2), fnum=1, title='img-space')
>>> kpts.draw(radius=3)
>>> kwplot.show_if_requested()
```

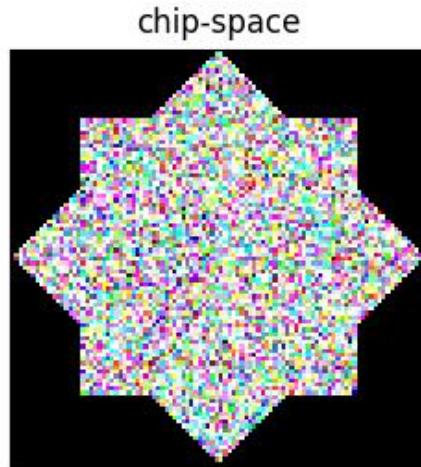

Parameters

`categories (List[Dict] | None)` – List of coco category dictionaries

```
_default_categories = [{"id": 0, "keypoints": [], "name": "background"}, {"id": 1, "keypoints": [], "name": "box", "supercategory": "vector"}, {"id": 2, "keypoints": [], "name": "circle", "supercategory": "vector"}, {"id": 3, "keypoints": [], "name": "star", "supercategory": "vector"}, {"id": 4, "keypoints": [], "name": "octagon", "supercategory": "vector"}, {"id": 5, "keypoints": [], "name": "diamond", "supercategory": "vector"}, {"id": 6, "keypoints": ["left_eye", "right_eye"], "name": "superstar", "supercategory": "raster"}, {"id": 7, "keypoints": ["top_tip", "mid_tip", "bot_tip"], "name": "eff", "supercategory": "raster"}, {"id": 8, "keypoints": [], "name": "raster", "supercategory": "raster"}, {"id": 9, "keypoints": [], "name": "vector", "supercategory": "shape"}, {"id": 10, "keypoints": [], "name": "shape"}]

_default_keypoint_categories = [{"id": 1, "name": "left_eye", "reflection_id": 2}, {"id": 2, "name": "right_eye", "reflection_id": 1}, {"id": 3, "name": "top_tip", "reflection_id": None}, {"id": 4, "name": "mid_tip", "reflection_id": None}, {"id": 5, "name": "bot_tip", "reflection_id": None}]

_default_catnames = ['star', 'eff', 'superstar']

@classmethod coerce(data=None, **kwargs)
```

Construct category patterns from either defaults or only with specific categories. Can accept either an existig category pattern object, a list of known catnames, or mscoco category dictionaries.

Example

```
>>> data = ['superstar']
>>> self = CategoryPatterns.coerce(data)
```

index(name)**get(index, default=NoParam)****random_category(chip, xy_offset=None, dims=None, newstyle=True, size=None)****Example**

```
>>> from kwcoco.demo.toypatterns import * # NOQA
>>> self = CategoryPatterns.coerce(['superstar'])
>>> chip = np.random.rand(64, 64)
>>> info = self.random_category(chip)
```

render_category(cname, chip, xy_offset=None, dims=None, newstyle=True, size=None)**Example**

```
>>> from kwcoco.demo.toypatterns import * # NOQA
>>> self = CategoryPatterns.coerce(['superstar'])
>>> chip = np.random.rand(64, 64)
>>> info = self.render_category('superstar', chip, newstyle=True)
>>> print('info = {}'.format(ub.urepr(info, nl=-1)))
>>> info = self.render_category('superstar', chip, newstyle=False)
>>> print('info = {}'.format(ub.urepr(info, nl=-1)))
```

Example

```
>>> from kwcoco.demo.toypatterns import * # NOQA
>>> self = CategoryPatterns.coerce(['superstar'])
>>> chip = None
>>> dims = (64, 64)
>>> info = self.render_category('superstar', chip, newstyle=True, dims=dims,
->>> size=dims)
>>> print('info = {}'.format(ub.urepr(info, nl=-1)))
```

_todo_refactor_geometric_info(cname, xy_offset, dims)

This function is used to populate kpts and sseg information in the autogenerated coco dataset before rendering. It is redundant with other functionality.

TODO: rectify with _from_elem

Example

```
>>> self = CategoryPatterns.coerce(['superstar'])
>>> dims = (64, 64)
>>> cname = 'superstar'
>>> xy_offset = None
>>> self._todo_refactor_geometric_info(cname, xy_offset, dims)
```

Example

```
>>> from kwcoco.demo.toypatterns import * # NOQA
>>> cname = 'star'
>>> xy_offset = None
>>> self = CategoryPatterns.coerce([cname])
>>> for d in range(0, 5):
...     dims = (d, d)
...     info = self._todo_refactor_geometric_info(cname, xy_offset, dims)
...     print(info['segmentation'].data)
```

_package_info(cname, data, mask, kpts, xy_offset, dims, newstyle)

packages data from _from_elem into coco-like annotation

_from_elem(cname, chip, size=None)

Example

```
>>> # hack to allow chip to be None
>>> chip = None
>>> size = (32, 32)
>>> cname = 'superstar'
>>> self = CategoryPatterns.coerce()
>>> self._from_elem(cname, chip, size)
```

kwcoco.demo.toypatterns.star(a, dtype=<class 'numpy.uint8'>)

Generates a star shaped structuring element.

Much faster than skimage.morphology version

class kwcoco.demo.toypatterns.Rasters

Bases: `object`

static superstar()

test data patch

static eff()

test data patch

2.1.1.3.2 Module contents

2.1.1.4 kwcoco.examples package

2.1.1.4.1 Submodules

2.1.1.4.1.1 kwcoco.examples.bench_large_hyperspectral module

2.1.1.4.1.2 kwcoco.examples.demo_kwco_spaces module

2.1.1.4.1.3 kwcoco.examples.demo_sql_and_zip_files module

2.1.1.4.1.4 kwcoco.examples.draw_gt_and_predicted_boxes module

2.1.1.4.1.5 kwcoco.examples.faq module

2.1.1.4.1.6 kwcoco.examples.getting_started_existing_dataset module

2.1.1.4.1.7 kwcoco.examples.loading_multispectral_data module

2.1.1.4.1.8 kwcoco.examples.modification_example module

2.1.1.4.1.9 kwcoco.examples.shifting_annot module

2.1.1.4.1.10 kwcoco.examples.simple_kwco_torch_dataset module

2.1.1.4.1.11 kwcoco.examples.vectorized_interface module

2.1.1.4.2 Module contents

2.1.1.5 kwcoco.metrics package

2.1.1.5.1 Submodules

2.1.1.5.1.1 kwcoco.metrics.assignment module

Todo:

- [] **_fast_pdist_priority**: Look at absolute difference in sibling entropy when deciding whether to go up or down in the tree.
- [] **medschool applications true-pred matching (applicant proposing)** fast algorithm.
- [] **Maybe looping over truth rather than pred is faster? but it makes you have to combine pred score / ious, which is weird.**
- [x] **preallocate ndarray and use hstack to build confusion vectors?**
 - doesn't help

- [] relevant classes / classes / classes-of-interest we care about needs
to be a first class member of detection metrics.
 - [] Add parameter that allows one prediction to “match” to more than one
truth object. (example: we have a duck detector problem and all the ducks in a row are annotated as separate object, and we only care about getting the group)
-

```
kwCOCO.metrics.assignment._assign_confusion_vectors(true_dets, pred_dets, bg_weight=1.0,
                                                    iou_thresh=0.5, bg_cidx=-1, bias=0.0,
                                                    classes=None, compat='all', prioritize='iou',
                                                    ignore_classes='ignore', max_dets=None)
```

Create confusion vectors for detections by assigning to ground true boxes

Given predictions and truth for an image return (y_pred, y_true, y_score), which is suitable for sklearn classification metrics

Parameters

- **true_dets** (*Detections*) – groundtruth with boxes, classes, and weights
- **pred_dets** (*Detections*) – predictions with boxes, classes, and scores
- **iou_thresh** (*float, default=0.5*) – bounding box overlap iou threshold required for assignment
- **bias** (*float, default=0.0*) – for computing bounding box overlap, either 1 or 0
- **gids** (*List[int], default=None*) – which subset of images ids to compute confusion metrics on. If not specified all images are used.
- **compat** (*str, default='all'*) – can be ('ancestors' | 'mutex' | 'all'). determines which pred boxes are allowed to match which true boxes. If 'mutex', then pred boxes can only match true boxes of the same class. If 'ancestors', then pred boxes can match true boxes that match or have a coarser label. If 'all', then any pred can match any true, regardless of its category label.
- **prioritize** (*str, default='iou'*) – can be ('iou' | 'class' | 'correct') determines which box to assign to if mutiple true boxes overlap a predicted box. if prioritize is iou, then the true box with maximum iou (above iou_thresh) will be chosen. If prioritize is class, then it will prefer matching a compatible class above a higher iou. If prioritize is correct, then ancestors of the true class are preferred over descendants of the true class, over unrelated classes.
- **bg_cidx** (*int, default=-1*) – The index of the background class. The index used in the truth column when a predicted bounding box does not match any true bounding box.
- **classes** (*List[str] | kwCOCO.CategoryTree*) – mapping from class indices to class names. Can also contain class heirarchy information.
- **ignore_classes** (*str | List[str]*) – class name(s) indicating ignore regions
- **max_dets** (*int*) – maximum number of detections to consider

Todo:

- [] This is a bottleneck function. An implementation in C / C++ / Cython would likely improve the overall system.
 - [] Implement crowd truth. Allow multiple predictions to match any truth object marked as “iscrowd”.
-

Returns

with relevant confusion vectors. This keys of this dict can be

interpreted as columns of a data frame. The *txs* / *pxs* columns represent the indexes of the true / predicted annotations that were assigned as matching. Additionally each row also contains the true and predicted class index, the predicted score, the true weight and the iou of the true and predicted boxes. A *txs* value of -1 means that the predicted box was not assigned to a true annotation and a *pxs* value of -1 means that the true annotation was not assigned to any predicted annotation.

Return type

dict

Example

```
>>> # xdoctest: +REQUIRES(module:pandas)
>>> import pandas as pd
>>> import kwimage
>>> # Given a raw numpy representation construct Detection wrappers
>>> true_dets = kwimage.Detections(
>>>     boxes=kwimage.Boxes(np.array([
>>>         [0, 0, 10, 10], [10, 0, 20, 10],
>>>         [10, 0, 20, 10], [20, 0, 30, 10]]), 'tlbr'),
>>>     weights=np.array([1, 0, .9, 1]),
>>>     class_idxs=np.array([0, 0, 1, 2]))
>>> pred_dets = kwimage.Detections(
>>>     boxes=kwimage.Boxes(np.array([
>>>         [6, 2, 20, 10], [3, 2, 9, 7],
>>>         [3, 9, 9, 7], [3, 2, 9, 7],
>>>         [2, 6, 7, 7], [20, 0, 30, 10]]), 'tlbr'),
>>>     scores=np.array([.5, .5, .5, .5, .5]),
>>>     class_idxs=np.array([0, 0, 1, 2, 0, 1]))
>>> bg_weight = 1.0
>>> compat = 'all'
>>> iou_thresh = 0.5
>>> bias = 0.0
>>> import kwcoco
>>> classes = kwcoco.CategoryTree.from_mutex(list(range(3)))
>>> bg_cidx = -1
>>> y = _assign_confusion_vectors(true_dets, pred_dets, bias=bias,
>>>                                bg_weight=bg_weight, iou_thresh=iou_thresh,
>>>                                compat=compat)
>>> y = pd.DataFrame(y)
>>> print(y) # xdoc: +IGNORE_WANT
   pred  true  score  weight      iou    txs    pxs
0     1     2  0.5000  1.0000  1.0000     3      5
1     0    -1  0.5000  1.0000 -1.0000    -1      4
2     2    -1  0.5000  1.0000 -1.0000    -1      3
3     1    -1  0.5000  1.0000 -1.0000    -1      2
4     0    -1  0.5000  1.0000 -1.0000    -1      1
5     0     0  0.5000  0.0000  0.6061     1      0
6    -1     0  0.0000  1.0000 -1.0000     0     -1
7    -1     1  0.0000  0.9000 -1.0000     2     -1
```

Example

```
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics.assignment import _assign_confusion_vectors
>>> import pandas as pd
>>> import ubelt as ub
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(nimgs=1, nclasses=8,
>>>                         nboxes=(0, 20), n_fp=20,
>>>                         box_noise=.2, cls_noise=.3)
>>> classes = dmet.classes
>>> gid = ub.peek(dmet.gid_to_pred_dets)
>>> true_dets = dmet.true_detections(gid)
>>> pred_dets = dmet.pred_detections(gid)
>>> y = _assign_confusion_vectors(true_dets, pred_dets,
>>>                               classes=dmet.classes,
>>>                               compat='all', prioritize='class')
>>> y = pd.DataFrame(y)
>>> print(y) # xdoc: +IGNORE_WANT
>>> y = _assign_confusion_vectors(true_dets, pred_dets,
>>>                               classes=dmet.classes,
>>>                               compat='ancestors', iou_thresh=.5)
>>> y = pd.DataFrame(y)
>>> print(y) # xdoc: +IGNORE_WANT
```

`kwcoco.metrics.assignment._critical_loop(true_dets, pred_dets, iou_lookup, isvalid_lookup,
 cx_to_matchable_txs, bg_weight, prioritize, iou_thresh_,
 pdist_priority, cx_to_ancestors, bg_cidx, ignore_classes,
 max_dets)`

`kwcoco.metrics.assignment._fast_pdist_priority(classes, prioritize, _cache={})`

Custom priority computation. Needs some vetting.

This is the priority used when deciding which prediction to assign to which truth.

Todo:

- [] Look at absolute difference in sibling entropy when deciding whether to go up or down in the tree.

`kwcoco.metrics.assignment._filter_ignore_regions(true_dets, pred_dets, ioaa_thresh=0.5,
 ignore_classes='ignore')`

Determine which true and predicted detections should be ignored.

Parameters

- `true_dets` (*Detections*)
- `pred_dets` (*Detections*)
- `ioaa_thresh` (*float*) – intersection over other area thresh for ignoring a region.

Returns

`flags indicating which true and predicted
 detections should be ignored.`

Return type

Tuple[ndarray, ndarray]

Example

```
>>> from kwcoco.metrics.assignment import * # NOQA
>>> from kwcoco.metrics.assignment import _filter_ignore_regions
>>> import kwimage
>>> pred_dets = kwimage.Detections.random(classes=['a', 'b', 'c'])
>>> true_dets = kwimage.Detections.random(
>>>     segmentations=True, classes=['a', 'b', 'c', 'ignore'])
>>> ignore_classes = {'ignore', 'b'}
>>> ioaa_thresh = 0.5
>>> print('true_dets = {!r}'.format(true_dets))
>>> print('pred_dets = {!r}'.format(pred_dets))
>>> flags1, flags2 = _filter_ignore_regions(
>>>     true_dets, pred_dets, ioaa_thresh=ioaa_thresh, ignore_classes=ignore_
>>> classes)
>>> print('flags1 = {!r}'.format(flags1))
>>> print('flags2 = {!r}'.format(flags2))

>>> flags3, flags4 = _filter_ignore_regions(
>>>     true_dets, pred_dets, ioaa_thresh=ioaa_thresh,
>>>     ignore_classes={c.upper() for c in ignore_classes})
>>> assert np.all(flags1 == flags3)
>>> assert np.all(flags2 == flags4)
```

2.1.1.5.1.2 kwcoco.metrics.clf_report module

```
kwcoco.metrics.clf_report.classification_report(y_true, y_pred, target_names=None,
                                                sample_weight=None, verbose=False,
                                                remove_unsupported=False, log=None,
                                                ascii_only=False)
```

Computes a classification report which is a collection of various metrics commonly used to evaluate classification quality. This can handle binary and multiclass settings.

Note that this function does not accept probabilities or scores and must instead act on final decisions. See ovr_classification_report for a probability based report function using a one-vs-rest strategy.

This emulates the bm(cm) Matlab script [[MatlabBM](#)] written by David Powers that is used for computing bookmaker, markedness, and various other scores and is based on the paper [[PowersMetrics](#)].

References

Parameters

- **y_true** (*ndarray*) – true labels for each item
- **y_pred** (*ndarray*) – predicted labels for each item
- **target_names** (*List | None*) – mapping from label to category name
- **sample_weight** (*ndarray | None*) – weight for each item
- **verbose** (*int*) – print if True
- **log** (*callable | None*) – print or logging function
- **remove_unsupported** (*bool*) – removes categories that have no support. Defaults to False.
- **ascii_only** (*bool*) – if True dont use unicode characters. if the environ ASCII_ONLY is present this is forced to True and cannot be undone. Defaults to False.

Example

```
>>> # xdoctest: +IGNORE_WANT
>>> # xdoctest: +REQUIRES(module:sklearn)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> y_true = [1, 1, 1, 1, 1, 2, 2, 2, 2, 2, 3, 3, 3, 3, 3, 3, 3, 3, 3]
>>> y_pred = [1, 2, 1, 3, 1, 2, 2, 3, 2, 2, 3, 3, 2, 3, 3, 3, 1, 3]
>>> target_names = None
>>> sample_weight = None
>>> report = classification_report(y_true, y_pred, verbose=0, ascii_only=1)
>>> print(report['confusion'])
pred   1   2   3   r
real
1      3   1   1   5
2      0   4   1   5
3      1   1   6   8
p     4   6   8  18
>>> print(report['metrics'])
metric      precision    recall      fpr  markedness  bookmaker      mcc  support
class
1          0.7500  0.6000  0.0769      0.6071  0.5231  0.5635      5
2          0.6667  0.8000  0.1538      0.5833  0.6462  0.6139      5
3          0.7500  0.7500  0.2000      0.5500  0.5500  0.5500      8
combined   0.7269  0.7222  0.1530      0.5751  0.5761  0.5758     18
```

Example

```
>>> # xdoctest: +IGNORE_WANT
>>> # xdoctest: +REQUIRES(module:sklearn)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcocoo.metrics.clf_report import * # NOQA
>>> y_true = [1, 1, 1, 1, 1, 2, 2, 2, 2, 2, 3, 3, 3, 3, 3, 3, 3, 3]
>>> y_pred = [1, 2, 1, 3, 1, 2, 2, 3, 2, 2, 3, 3, 2, 3, 3, 3, 1, 3]
>>> target_names = None
```

(continues on next page)

(continued from previous page)

```
>>> sample_weight = None
>>> logs = []
>>> report = classification_report(y_true, y_pred, verbose=1, ascii_only=True,
-> log=logs.append)
>>> print('\n'.join(logs))
```

`kwcoc.metrics.clf_report.ovr_classification_report(mc_y_true, mc_probs, target_names=None,
sample_weight=None, metrics=None,
verbose=0, remove_unsupported=False,
log=None)`

One-vs-rest classification report

Parameters

- **mc_y_true** (*ndarray*) – multiclass truth labels (integer label format). Shape [N].
- **mc_probs** (*ndarray*) – multiclass probabilities for each class. Shape [N x C].
- **target_names** (*Dict[int, str] | None*) – mapping from int label to string name
- **sample_weight** (*ndarray | None*) – weight for each item. Shape [N].
- **metrics** (*List[str] | None*) – names of metrics to compute

Example

```
>>> # xdoctest: +IGNORE_WANT
>>> # xdoctest: +REQUIRES(module:sklearn)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoc.metrics.clf_report import * # NOQA
>>> y_true = [1, 1, 1, 1, 1, 2, 2, 2, 2, 0, 0, 0, 0, 0, 0, 0, 0]
>>> y_probs = np.random.rand(len(y_true), max(y_true) + 1)
>>> target_names = None
>>> sample_weight = None
>>> verbose = True
>>> report = ovr_classification_report(y_true, y_probs)
>>> print(report['ave'])
auc      0.6541
ap       0.6824
kappa    0.0963
mcc      0.1002
brier    0.2214
dtype: float64
>>> print(report['ovr'])
      auc      ap      kappa      mcc      brier      support      weight
0 0.6062 0.6161 0.0526 0.0598 0.2608      8  0.4444
1 0.5846 0.6014 0.0000 0.0000 0.2195      5  0.2778
2 0.8000 0.8693 0.2623 0.2652 0.1602      5  0.2778
```

2.1.1.5.1.3 kwcoco.metrics.confusion_measures module

Classes that store accumulated confusion measures (usually derived from confusion vectors).

For each chosen threshold value:

- thresholds[i] - the i-th threshold value

The primary data we manipulate are arrays of “confusion” counts, i.e.

- tp_count[i] - true positives at the i-th threshold
- fp_count[i] - false positives at the i-th threshold
- fn_count[i] - false negatives at the i-th threshold
- tn_count[i] - true negatives at the i-th threshold


```
class kwcoco.metrics.confusion_measures.Measures(info)
```

Bases: `NiceRepr, DictProxy`

Holds accumulated confusion counts, and derived measures

Example

```
>>> from kwcoco.metrics.confusion_vectors import BinaryConfusionVectors # NOQA
>>> binvecs = BinaryConfusionVectors.demo(n=100, p_error=0.5)
>>> self = binvecs.measures()
>>> print('self = {!r}'.format(self))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()l()
>>> self.draw(doclf=True)
>>> self.draw(key='pr', pnum=(1, 2, 1))
>>> self.draw(key='roc', pnum=(1, 2, 2))
>>> kwplot.show_if_requested()
```

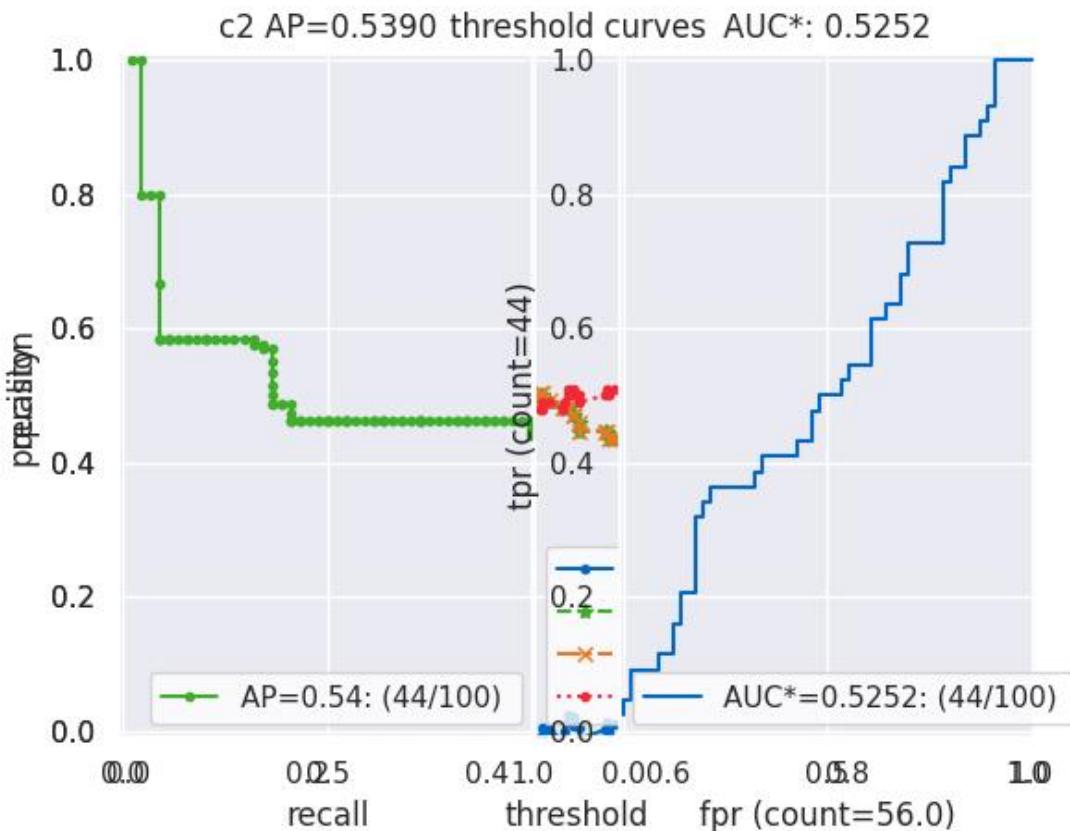

```

property catname
reconstruct()
classmethod from_json(state)
summary()
maximized_thresholds()
    Returns thresholds that maximize metrics.
counts()
draw(key=None, prefix='', **kw)

```

Example

```

>>> # xdoctest: +REQUIRES(module:kwplot)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics.confusion_vectors import ConfusionVectors # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> ovr_cfsn = cfsn_vecs.binarize_ovr(keyby='name')
>>> self = ovr_cfsn.measures()['perclass']
>>> self.draw('mcc', doclf=True, fnum=1)

```

(continues on next page)


(continued from previous page)

```
>>> self.draw('pr', doclf=1, fnum=2)
>>> self.draw('roc', doclf=1, fnum=3)

summary_plot(fnum=1, title='', subplots='auto')
```

Example

```
>>> from kwCOCO.metrics.confusion_measures import * # NOQA
>>> from kwCOCO.metrics.confusion_vectors import ConfusionVectors # NOQA
>>> cfsn_vecs = ConfusionVectors.demo(n=3, p_error=0.5)
>>> binvecs = cfsn_vecs.binarize_classless()
>>> self = binvecs.measures()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autoplots()
>>> self.summary_plot()
>>> kwplot.show_if_requested()
```

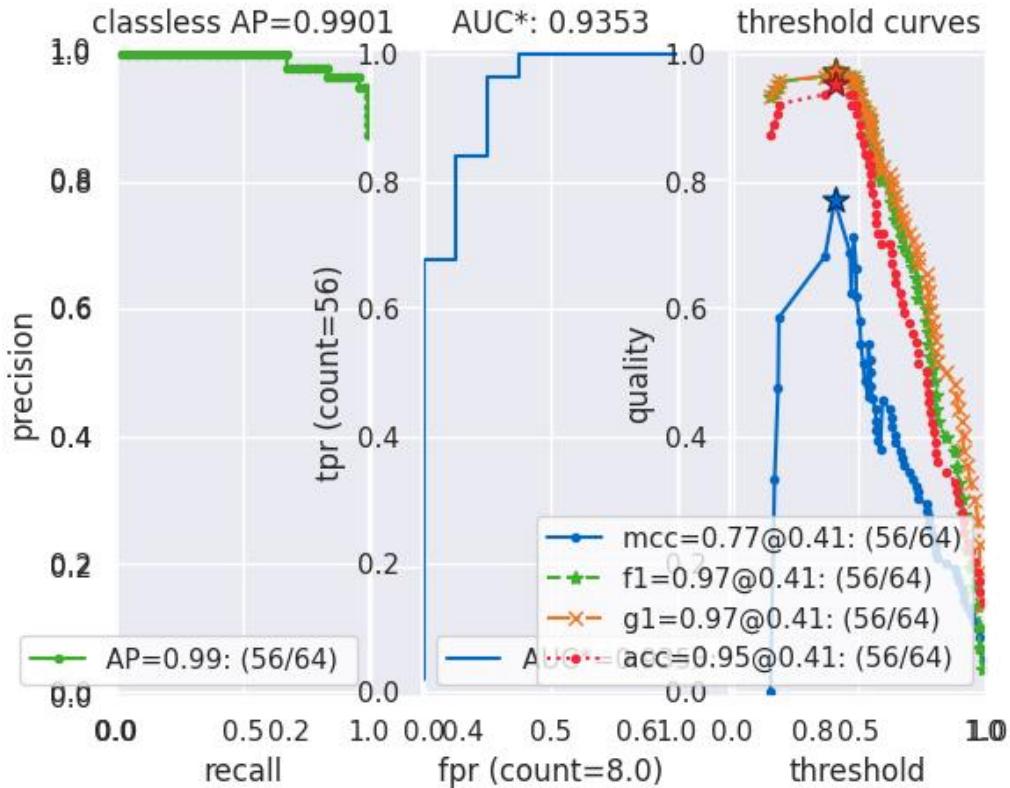

classmethod demo(kwargs)**

Create a demo Measures object for testing / demos

Parameters

****kwargs** – passed to `BinaryConfusionVectors.demo()`. some valid keys are: n, rng, p_rue, p_error, p_miss.

```
classmethod combine(tocombine, precision=None, growth=None, thresh_bins=None)
```

Combine binary confusion metrics

Parameters


- **tocombine** (*List[Measures]*) – a list of measures to combine into one
- **precision** (*int | None*) – If specified rounds thresholds to this precision which can prevent a RAM explosion when combining a large number of measures. However, this is a lossy operation and will impact the underlying scores. NOTE: use **growth** instead.
- **growth** (*int | None*) – if specified this limits how much the resulting measures are allowed to grow by. If *None*, growth is unlimited. Otherwise, if growth is ‘max’, the growth is limited to the maximum length of an input. We might make this more numerical in the future.
- **thresh_bins** (*int | None*) – Force this many threshold bins.

Returns

`kwcoc.metrics.confusion_measures.Measures`

Example

```
>>> from kwcoc.metrics.confusion_measures import * # NOQA
>>> measures1 = Measures.demo(n=15)
>>> measures2 = measures1
>>> tocombine = [measures1, measures2]
>>> new_measures = Measures.combine(tocombine)
>>> new_measures.reconstruct()
>>> print('new_measures = {!r}'.format(new_measures))
>>> print('measures1 = {!r}'.format(measures1))
>>> print('measures2 = {!r}'.format(measures2))
>>> print(ub.urepr(measures1.__json__(), nl=1, sort=0))
>>> print(ub.urepr(measures2.__json__(), nl=1, sort=0))
>>> print(ub.urepr(new_measures.__json__(), nl=1, sort=0))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.figure(fnum=1)
>>> new_measures.summary_plot()
>>> measures1.summary_plot()
>>> measures1.draw('roc')
>>> measures2.draw('roc')
>>> new_measures.draw('roc')
```

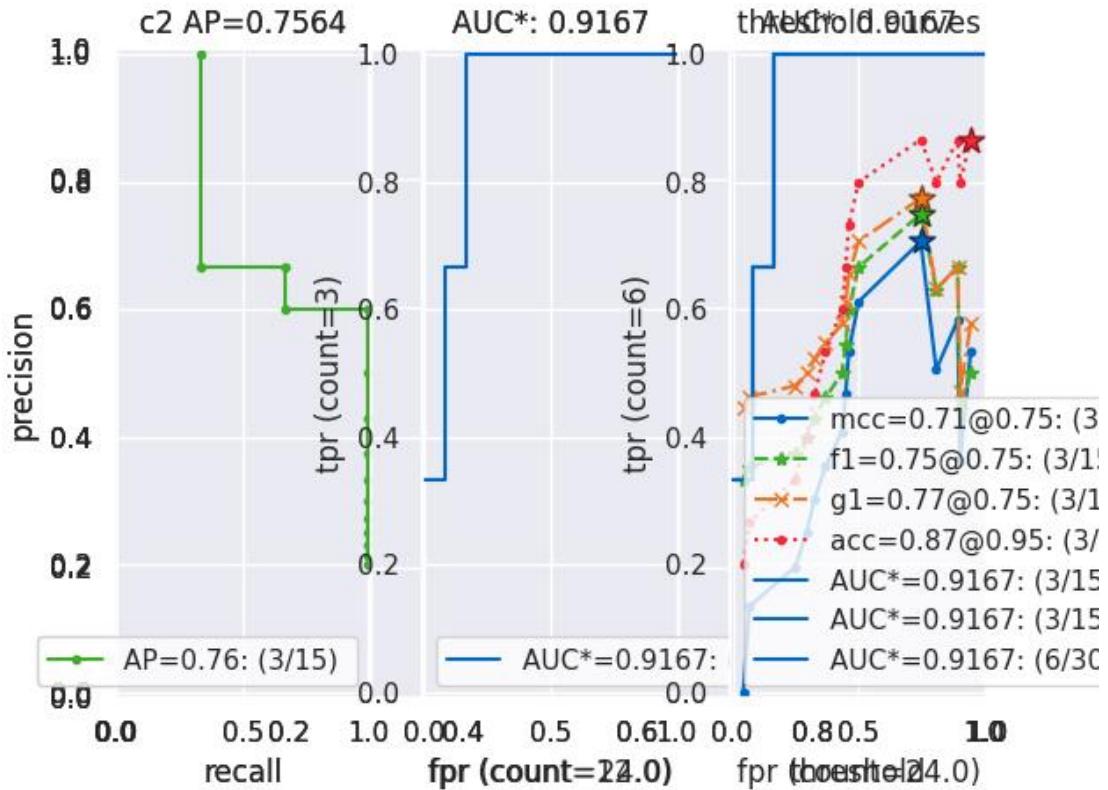

Example

```
>>> # Demonstrate issues that can arise from choosing a precision
>>> # that is too low when combining metrics. Breakpoints
>>> # between different metrics can get muddled, but choosing a
>>> # precision that is too high can overwhelm memory.
>>> from kwCOCO.metrics.confusion_measures import * # NOQA
>>> base = ub.map_vals(np.asarray, {
>>>     'tp_count': [ 1, 1, 2, 2, 2, 2, 3],
>>>     'fp_count': [ 0, 1, 1, 2, 3, 4, 5],
>>>     'fn_count': [ 1, 1, 0, 0, 0, 0, 0],
>>>     'tn_count': [ 5, 4, 4, 3, 2, 1, 0],
>>>     'thresholds': [.0, .0, .0, .0, .0, .0, .0],
>>> })
>>> # Make tiny offsets to thresholds
>>> rng = kwarray.ensure_rng(0)
>>> n = len(base['thresholds'])
>>> offsets = [
>>>     sorted(rng.rand(n) * 10 ** -rng.randint(4, 7))[::-1]
>>>     for _ in range(20)
>>> ]
>>> tocombine = []
>>> for offset in offsets:
>>>     base_n = base.copy()
>>>     base_n['thresholds'] += offset
```

(continues on next page)

(continued from previous page)

```
>>> measures_n = Measures(base_n).reconstruct()
>>> tocombine.append(measures_n)
>>> for precision in [6, 5, 2]:
>>>     combo = Measures.combine(tocombine, precision=precision).reconstruct()
>>>     print('precision = {!r}'.format(precision))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> for growth in [None, 'max', 'log', 'root', 'half']:
>>>     combo = Measures.combine(tocombine, growth=growth).reconstruct()
>>>     print('growth = {!r}'.format(growth))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> #print(combo.counts().pandas())
```

Example

```
>>> # Test case: combining a single measures should leave it unchanged
>>> from kwcoc.metrics.confusion_measures import * # NOQA
>>> measures = Measures.demo(n=40, p_true=0.2, p_error=0.4, p_miss=0.6)
>>> df1 = measures.counts().pandas().fillna(0)
>>> print(df1)
>>> tocombine = [measures]
>>> combo = Measures.combine(tocombine)
>>> df2 = combo.counts().pandas().fillna(0)
>>> print(df2)
>>> assert np.allclose(df1, df2)
```

```
>>> combo = Measures.combine(tocombine, thresh_bins=2)
>>> df3 = combo.counts().pandas().fillna(0)
>>> print(df3)
```

```
>>> # I am NOT sure if this is correct or not
>>> thresh_bins = 20
>>> combo = Measures.combine(tocombine, thresh_bins=thresh_bins)
>>> df4 = combo.counts().pandas().fillna(0)
>>> print(df4)
```

```
>>> combo = Measures.combine(tocombine, thresh_bins=np.linspace(0, 1, 20))
>>> df4 = combo.counts().pandas().fillna(0)
>>> print(df4)
```

```
assert np.allclose(combo['thresholds'], measures['thresholds']) assert np.allclose(combo['fp_count'], measures['fp_count']) assert np.allclose(combo['tp_count'], measures['tp_count']) assert np.allclose(combo['tp_count'], measures['tp_count'])

globals().update(xdev.get_func_kwargs(Measures.combine))
```

Example

```
>>> # Test degenerate case
>>> from kwcocoo.metrics.confusion_measures import * # NOQA
>>> tocombine = [
>>>     {'fn_count': [0.0], 'fp_count': [359980.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7747.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [360849.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [424.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [367003.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [991.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [367976.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [1017.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676338.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7067.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676348.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7406.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676626.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7858.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676693.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [10969.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677269.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11188.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677331.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11734.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677395.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11556.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677418.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11621.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677422.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11424.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677648.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [9804.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677826.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [2470.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677834.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [2470.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677835.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [2470.0]}, 
>>>     {'fn_count': [11123.0, 0.0], 'fp_count': [0.0, 676754.0], 'thresholds': [0.0, 676754.0], 'tn_count': [676754.0, 0.0], 'tp_count': [2.0, 11125.0]}, 
>>>     {'fn_count': [7738.0, 0.0], 'fp_count': [0.0, 676466.0], 'thresholds': [0.0, 676466.0], 'tn_count': [676466.0, 0.0], 'tp_count': [0.0, 7738.0]}, 
>>>     {'fn_count': [8653.0, 0.0], 'fp_count': [0.0, 676341.0], 'thresholds': [0.0, 676341.0], 'tn_count': [676341.0, 0.0], 'tp_count': [0.0, 8653.0]}, 
>>> ]
>>> thresh_bins = np.linspace(0, 1, 4)
>>> combo = Measures.combine(tocombine, thresh_bins=thresh_bins).reconstruct()
>>> print('tocombine = {}'.format(ub.urepr(tocombine, nl=2)))
>>> print('thresh_bins = {!r}'.format(thresh_bins))
```

(continues on next page)

(continued from previous page)

```
>>> print(ub.urepr(combo.__json__(), nl=1))
>>> for thresh_bins in [4096, 1]:
>>>     combo = Measures.combine(tocombine, thresh_bins=thresh_bins).
>>>     reconstruct()
>>>     print('thresh_bins = {!r}'.format(thresh_bins))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> for precision in [6, 5, 2]:
>>>     combo = Measures.combine(tocombine, precision=precision).reconstruct()
>>>     print('precision = {!r}'.format(precision))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> for growth in [None, 'max', 'log', 'root', 'half']:
>>>     combo = Measures.combine(tocombine, growth=growth).reconstruct()
>>>     print('growth = {!r}'.format(growth))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
```

`kwcoc.metrics.confusion_measures._combine_threshold(tocombine_thresh, thresh_bins, growth, precision)`

Logic to take care of combining thresholds in the case bins are not given

This can be fairly slow and lead to unnecessary memory usage

`kwcoc.metrics.confusion_measures.reversible_diff(arr, assume_sorted=1, reverse=False)`

Does a reversible array difference operation.

This will be used to find positions where accumulation happened in confusion count array.

```
class kwcoc.metrics.confusion_measures.PerClass_Measures(cx_to_info)
    Bases: NiceRepr, DictProxy
    summary()
    classmethod from_json(state)
    draw(key='mcc', prefix='', **kw)
```

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> from kwcoc.metrics.confusion_vectors import ConfusionVectors # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> ovr_cfsn = cfsn_vecs.binarize_ovr(keyby='name')
>>> self = ovr_cfsn.measures()['perclass']
>>> self.draw('mcc', doclf=True, fnum=1)
>>> self.draw('pr', doclf=1, fnum=2)
>>> self.draw('roc', doclf=1, fnum=3)
```

`draw_roc(prefix='', **kw)`

`draw_pr(prefix='', **kw)`


`summary_plot(fnum=1, title='', subplots='auto')`

CommandLine

```
python ~/code/kwcoco/kwcoco/metrics/confusion_measures.py PerClass_Measures.
    ↵summary_plot --show
```

Example

```
>>> from kwcoco.metrics.confusion_measures import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 1), n_fn=(0, 3), nimgs=32, nboxes=(0, 32),
>>>     classes=3, rng=0, newstyle=1, box_noise=0.7, cls_noise=0.2, score_
>>>     noise=0.3, with_probs=False)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> ovr_cfsn = cfsn_vecs.binarize_ovr(keyby='name', ignore_classes=['vector',
>>>     'raster'])
>>> self = ovr_cfsn.measures()['perclass']
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> import seaborn as sns
>>> sns.set()
>>> self.summary_plot(title='demo summary_plot ovr', subplots=['pr', 'roc'])
>>> kwplot.show_if_requested()
>>> self.summary_plot(title='demo summary_plot ovr', subplots=['mcc', 'acc'],
>>>     fnum=2)
```

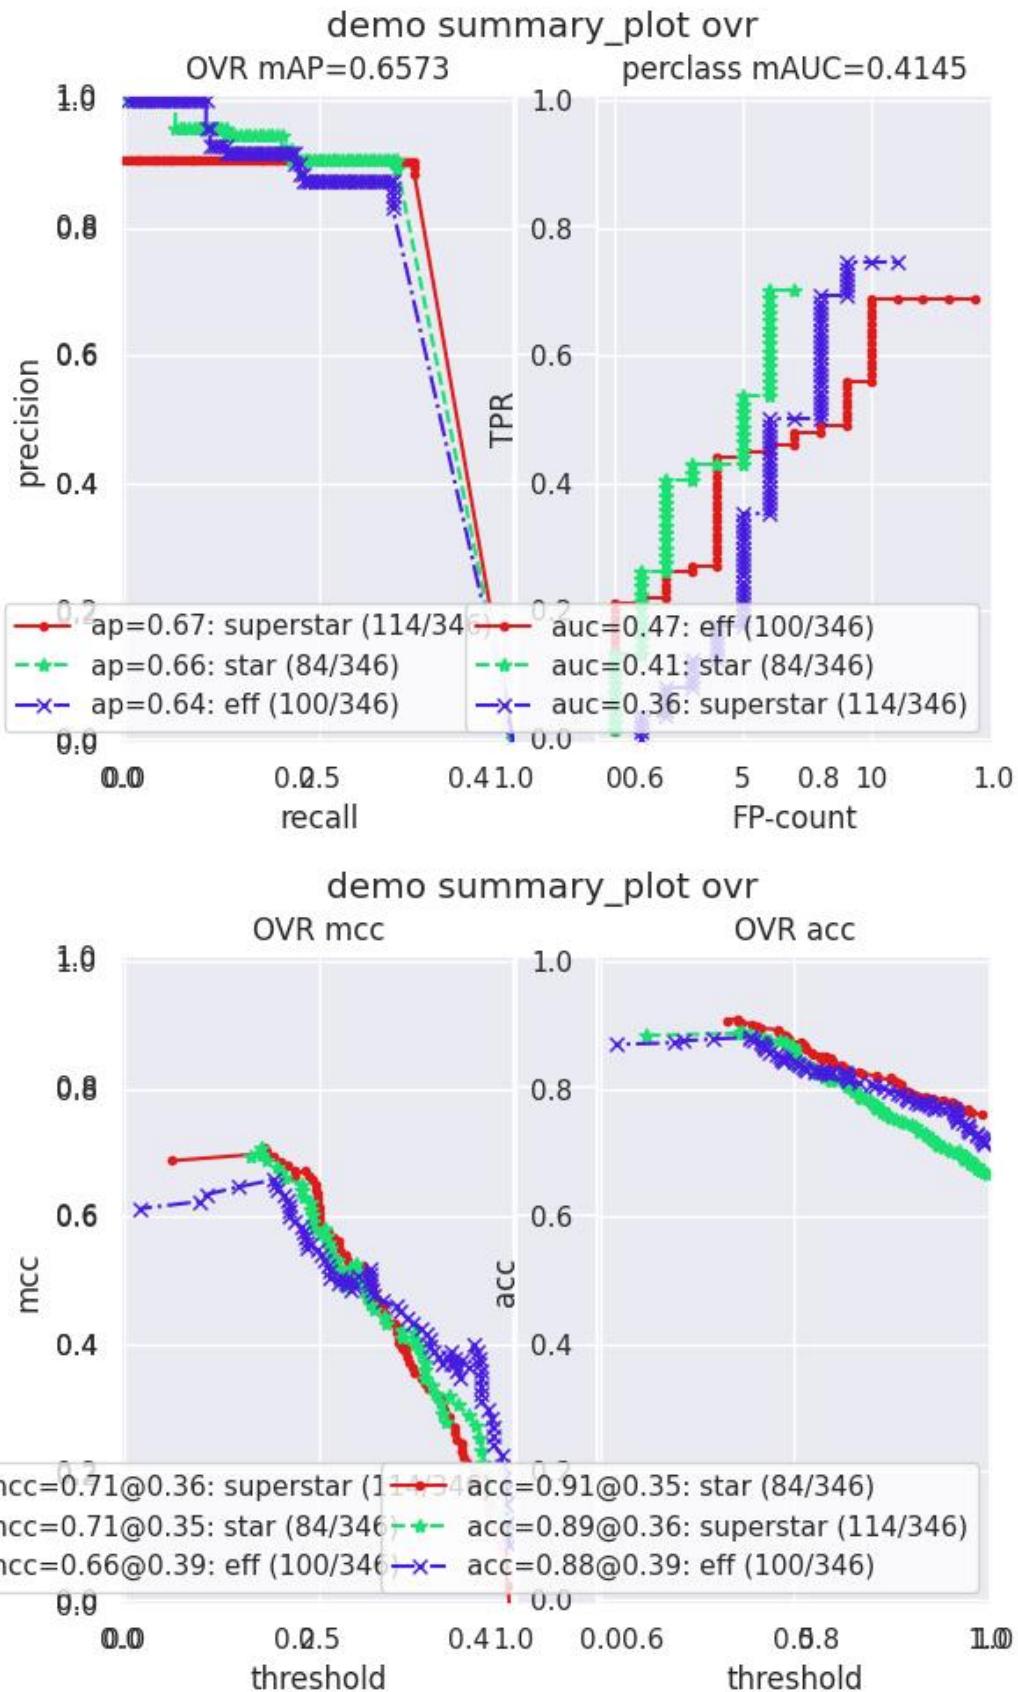

```
class kwcocoo.metrics.confusion_measures.MeasureCombiner(precision=None, growth=None,
                                                        thresh_bins=None)
```

Bases: object

Helper to iteratively combine binary measures generated by some process

Example

```
>>> from kwcocoo.metrics.confusion_measures import * # NOQA
>>> from kwcocoo.metrics.confusion_vectors import BinaryConfusionVectors
>>> rng = kwarray.ensure_rng(0)
>>> bin_combiner = MeasureCombiner(growth='max')
>>> for _ in range(80):
>>>     bin_cfsn_vecs = BinaryConfusionVectors.demo(n=rng.randint(40, 50), rng=rng, ↴
>>>     p_true=0.2, p_error=0.4, p_miss=0.6)
>>>     bin_measures = bin_cfsn_vecs.measures()
>>>     bin_combiner.submit(bin_measures)
>>> combined = bin_combiner.finalize()
>>> print('combined = {!r}'.format(combined))
```

`property queue_size`

`submit(other)`

`combine()`

`finalize()`

```
class kwcocoo.metrics.confusion_measures.OneVersusRestMeasureCombiner(precision=None,
                                                                    growth=None,
                                                                    thresh_bins=None)
```

Bases: object

Helper to iteratively combine ovr measures generated by some process

Example

```
>>> from kwcocoo.metrics.confusion_measures import * # NOQA
>>> from kwcocoo.metrics.confusion_vectors import OneVsRestConfusionVectors
>>> rng = kwarray.ensure_rng(0)
>>> ovr_combiner = OneVersusRestMeasureCombiner(growth='max')
>>> for _ in range(80):
>>>     ovr_cfsn_vecs = OneVsRestConfusionVectors.demo()
>>>     ovr_measures = ovr_cfsn_vecs.measures()
>>>     ovr_combiner.submit(ovr_measures)
>>> combined = ovr_combiner.finalize()
>>> print('combined = {!r}'.format(combined))
```

`submit(other)`

`_summary()`

`combine()`

finalize()

```
kwcoco.metrics.confusion_measures.populate_info(info)
```

Given raw accumulated confusion counts, populated secondary measures like AP, AUC, F1, MCC, etc..

2.1.1.5.1.4 kwcoco.metrics.confusion_vectors module

Classes that store raw confusion vectors, which can be accumulated into confusion measures.

```
class kwcoco.metrics.confusion_vectors.ConfusionVectors(data, classes, probs=None)
```

Bases: `NiceRepr`

Stores information used to construct a confusion matrix. This includes corresponding vectors of predicted labels, true labels, sample weights, etc...

Variables

- `data` (`kwarray.DataFrameArray`) – should at least have keys `true`, `pred`, `weight`
- `classes` (`Sequence` / `CategoryTree`) – list of category names or category graph
- `probs` (`ndarray` / `None`) – probabilities for each class


Example

```
>>> # xdoctest: IGNORE_WANT
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
...     nimgs=10, nboxes=(0, 10), n_fp=(0, 1), classes=3)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> print(cfsn_vecs.data._pandas())
   pred  true    score    weight      iou      txs      pxs      gid
0      2      2  10.0000  1.00000  1.00000       0       4       0
1      2      2  7.5025  1.00000  1.00000       1       3       0
2      1      1  5.0050  1.00000  1.00000       2       2       0
3      3     -1  2.5075  1.00000 -1.00000      -1       1       0
4      2     -1  0.0100  1.00000 -1.00000      -1       0       0
5     -1      2  0.0000  1.00000 -1.00000       3      -1       0
6     -1      2  0.0000  1.00000 -1.00000       4      -1       0
7      2      2  10.0000  1.00000  1.00000       0       5       1
8      2      2  8.0020  1.00000  1.00000       1       4       1
9      1      1  6.0040  1.00000  1.00000       2       3       1
...
62     -1      2  0.0000  1.00000 -1.00000       7      -1       7
63     -1      3  0.0000  1.00000 -1.00000       8      -1       7
64     -1      1  0.0000  1.00000 -1.00000       9      -1       7
65      1     -1  10.0000  1.00000 -1.00000      -1       0       8
66      1      1  0.0100  1.00000  1.00000       0       1       8
67      3     -1  10.0000  1.00000 -1.00000      -1       3       9
68      2      2  6.6700  1.00000  1.00000       0       2       9
69      2      2  3.3400  1.00000  1.00000       1       1       9
70      3     -1  0.0100  1.00000 -1.00000      -1       0       9
71     -1      2  0.0000  1.00000 -1.00000       2      -1       9
```

```

>>> # xdoctest: +REQUIRES(--show)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> import kwplot
>>> kwplot.autopl()
>>> from kwcoco.metrics.confusion_vectors import ConfusionVectors
>>> cfsn_vecs = ConfusionVectors.demo(
>>>     nimgs=128, nboxes=(0, 10), n_fp=(0, 3), n_fn=(0, 3), classes=3)
>>> cx_to_binvecs = cfsn_vecs.binarize_ovr()
>>> measures = cx_to_binvecs.measures()['perclass']
>>> print('measures = {!r}'.format(measures))
measures = <PerClass_Measures{
    'cat_1': <Measures({'ap': 0.227, 'auc': 0.507, 'catname': cat_1, 'max_f1': f1=0.
    ↵45@0.47, 'nsupport': 788.000})>,
    'cat_2': <Measures({'ap': 0.288, 'auc': 0.572, 'catname': cat_2, 'max_f1': f1=0.
    ↵51@0.43, 'nsupport': 788.000})>,
    'cat_3': <Measures({'ap': 0.225, 'auc': 0.484, 'catname': cat_3, 'max_f1': f1=0.
    ↵46@0.40, 'nsupport': 788.000})>,
}> at 0x7facf77bdffd0>
>>> kwplot.figure(fnum=1, doclf=True)
>>> measures.draw(key='pr', fnum=1, pnum=(1, 3, 1))
>>> measures.draw(key='roc', fnum=1, pnum=(1, 3, 2))
>>> measures.draw(key='mcc', fnum=1, pnum=(1, 3, 3))
...

```

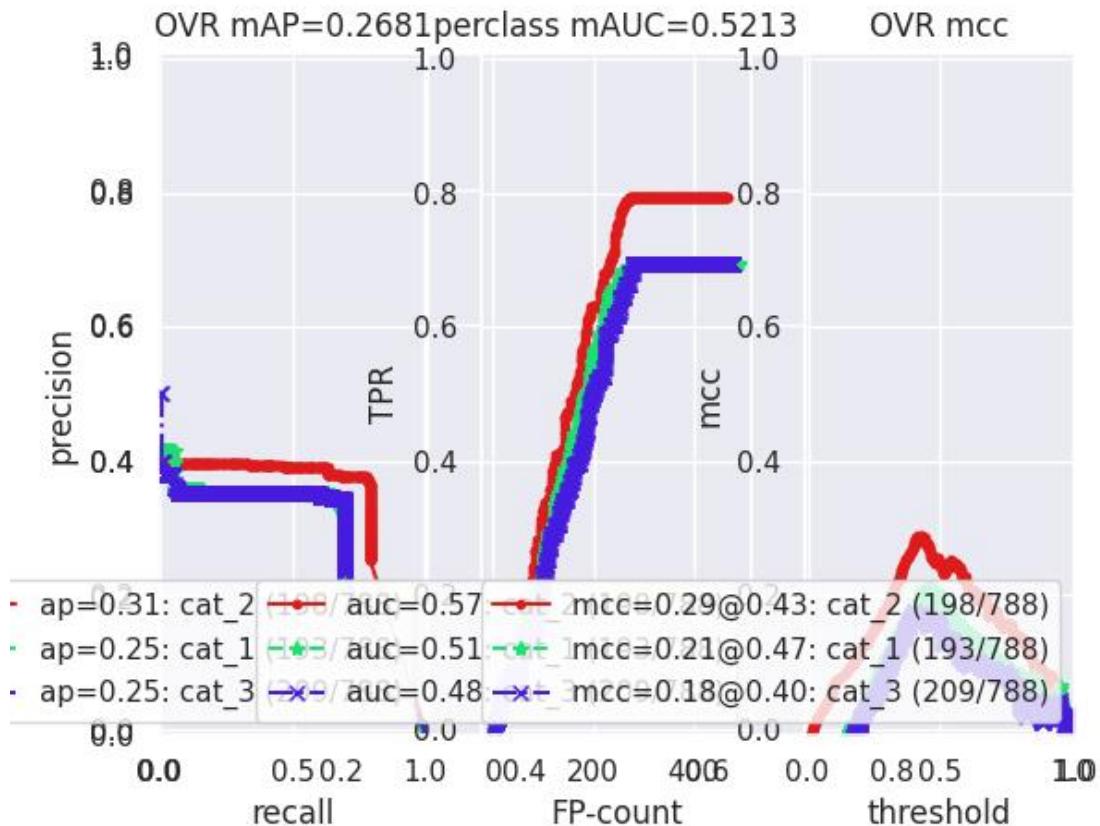

```
classmethod from_json(state)
```

```
classmethod demo(**kw)

Parameters
**kwargs – See kwcoc.metrics.DetectionMetrics.demo\(\)

Returns
ConfusionVectors
```

Example

```
>>> from kwcoc.metrics.confusion_vectors import * # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> print('cfsn_vecs = {!r}'.format(cfsn_vecs))
>>> cx_to_binvecs = cfsn_vecs.binarize_ovr()
>>> print('cx_to_binvecs = {!r}'.format(cx_to_binvecs))
```

classmethod from_arrays(true, pred=None, score=None, weight=None, probs=None, classes=None)

Construct confusion vector data structure from component arrays

Example

```
>>> # xdoctest: +REQUIRES(module:pandas)
>>> import kwarray
>>> classes = ['person', 'vehicle', 'object']
>>> rng = kwarray.ensure_rng(0)
>>> true = (rng.rand(10) * len(classes)).astype(int)
>>> probs = rng.rand(len(true), len(classes))
>>> cfsn_vecs = ConfusionVectors.from_arrays(true=true, probs=probs, u
->classes=classes)
>>> cfsn_vecs.confusion_matrix()
pred      person  vehicle  object
real
person        0        0        0
vehicle       2        4        1
object        2        1        0
```

confusion_matrix(compress=False)

Builds a confusion matrix from the confusion vectors.

Parameters

compress (bool, default=False) – if True removes rows / columns with no entries

Returns

cm

[the labeled confusion matrix]

(Note: we should write a efficient replacement for
this use case. #remove_pandas)

Return type

pd.DataFrame

CommandLine

```
xdotest -m kwcoco.metrics.confusion_vectors ConfusionVectors.confusion_matrix
```

Example

```
>>> # xdotest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 10), n_fp=(0, 1), n_fn=(0, 1),
>>>     classes=3, cls_noise=.2, newstyle=False)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> cm = cfsn_vecs.confusion_matrix()

...
>>> print(cm.to_string(float_format=lambda x: '%.2f' % x))
pred      background  cat_1  cat_2  cat_3
real
background      0.00   1.00   2.00   3.00
cat_1          3.00  12.00   0.00   0.00
cat_2          3.00   0.00  14.00   0.00
cat_3          2.00   0.00   0.00  17.00
```

`coarsen(cx)`

Creates a coarsened set of vectors

Returns

ConfusionVectors

`binarize_classless(negative_classes=None)`

Creates a binary representation useful for measuring the performance of detectors. It is assumed that scores of “positive” classes should be high and “negative” classes should be low.

Parameters

`negative_classes` (`List[str | int] | None`) – list of negative class names or idxs, by default chooses any class with a true class index of -1. These classes should ideally have low scores.

Returns

BinaryConfusionVectors

Note: The “classlessness” of this depends on the `compat="all"` argument being used when constructing confusion vectors, otherwise it becomes something like a macro-average because the class information was used in deciding which true and predicted boxes were allowed to match.

Example

```
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo()
>>> nimgs=10, nboxes=(0, 10), n_fp=(0, 1), n_fn=(0, 1), classes=3
>>> cfsn_vecs = dmet.confusion_vectors()
>>> class_idxs = list(dmet.classes.node_to_idx.values())
>>> binvecs = cfsn_vecs.binarize_classless()
```

binarize_ovr(*mode=1*, *keyby='name'*, *ignore_classes={'ignore'}*, *approx=False*)

Transforms cfsn_vecs into one-vs-rest BinaryConfusionVectors for each category.

Parameters

- **mode** (*int, default=1*) – 0 for heirarchy aware or 1 for voc like. MODE 0 IS PROBABLY BROKEN
- **keyby** (*int | str*) – can be cx or name
- **ignore_classes** (*Set[str]*) – category names to ignore
- **approx** (*bool, default=False*) – if True try and approximate missing scores otherwise assume they are irrecoverable and use -inf

Returns

which behaves like

Dict[int, BinaryConfusionVectors]: cx_to_binvecs

Return type

OneVsRestConfusionVectors

Example

```
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> print('cfsn_vecs = {!r}'.format(cfsn_vecs))
>>> catname_to_binvecs = cfsn_vecs.binarize_ovr(keyby='name')
>>> print('catname_to_binvecs = {!r}'.format(catname_to_binvecs))
```

cfsn_vecs.data.pandas() catname_to_binvecs.cx_to_binvecs['class_1'].data.pandas()

Note:

classification_report(*verbose=0*)

Build a classification report with various metrics.

Example

```
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> report = cfsn_vecs.classification_report(verbose=1)
```

`class kwcoco.metrics.confusion_vectors.OneVsRestConfusionVectors(cx_to_binvecs, classes)`

Bases: `NiceRepr`

Container for multiple one-vs-rest binary confusion vectors

Variables

- `cx_to_binvecs` –
- `classes` –

Example

```
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 10), n_fp=(0, 1), classes=3)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> self = cfsn_vecs.binarize_ovr(keyby='name')
>>> print('self = {!r}'.format(self))
```

`classmethod demo()`

Parameters

`**kwargs` – See `kwcoco.metrics.DetectionMetrics.demo()`

Returns

`ConfusionVectors`

`keys()`

`measures(stabilize_thresh=7, fp_cutoff=None, monotonic_ppv=True, ap_method='pycocotools')`

Creates binary confusion measures for every one-versus-rest category.

Parameters

- `stabilize_thresh (int)` – if fewer than this many data points inserts dummy stabilization data so curves can still be drawn. Default to 7.
- `fp_cutoff (int | None)` – maximum number of false positives in the truncated roc curves. The default `None` is equivalent to `float('inf')`
- `monotonic_ppv (bool)` – if `True` ensures that precision is always increasing as recall decreases. This is done in pycocotools scoring, but I'm not sure its a good idea. Default to `True`.

SeeAlso:

`BinaryConfusionVectors.measures()`

Example

```
>>> self = OneVsRestConfusionVectors.demo()  
>>> thresh_result = self.measures()['perclass']
```

`ovr_classification_report()`

`class kwcoc.metrics.confusion_vectors.BinaryConfusionVectors(data, cx=None, classes=None)`

Bases: `NiceRepr`

Stores information about a binary classification problem. This is always with respect to a specific class, which is given by `cx` and `classes`.

The `data DataFrameArray` must contain

`is_true` - if the row is an instance of class `classes[cx]` `pred_score` - the predicted probability of class `classes[cx]`, and `weight` - sample weight of the example

Example

```
>>> from kwcoc.metrics.confusion_vectors import * # NOQA  
>>> self = BinaryConfusionVectors.demo(n=10)  
>>> print('self = {!r}'.format(self))  
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

```
>>> self = BinaryConfusionVectors.demo(n=0)  
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

```
>>> self = BinaryConfusionVectors.demo(n=1)  
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

```
>>> self = BinaryConfusionVectors.demo(n=2)  
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

`classmethod demo(n=10, p_true=0.5, p_error=0.2, p_miss=0.0, rng=None)`

Create random data for tests

Parameters


- `n (int)` – number of rows
- `p_true (float)` – fraction of real positive cases
- `p_error (float)` – probability of making a recoverable mistake
- `p_miss (float)` – probability of making a unrecoverable mistake
- `rng (int | RandomState | None)` – random seed / state

Returns

`BinaryConfusionVectors`

Example

```
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> cfsn = BinaryConfusionVectors.demo(n=1000, p_error=0.1, p_miss=0.1)
>>> measures = cfsn.measures()
>>> print('measures = {}'.format(ub.urepr(measures, nl=1)))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.figure(fnum=1, pnum=(1, 2, 1))
>>> measures.draw('pr')
>>> kwplot.figure(fnum=1, pnum=(1, 2, 2))
>>> measures.draw('roc')
```

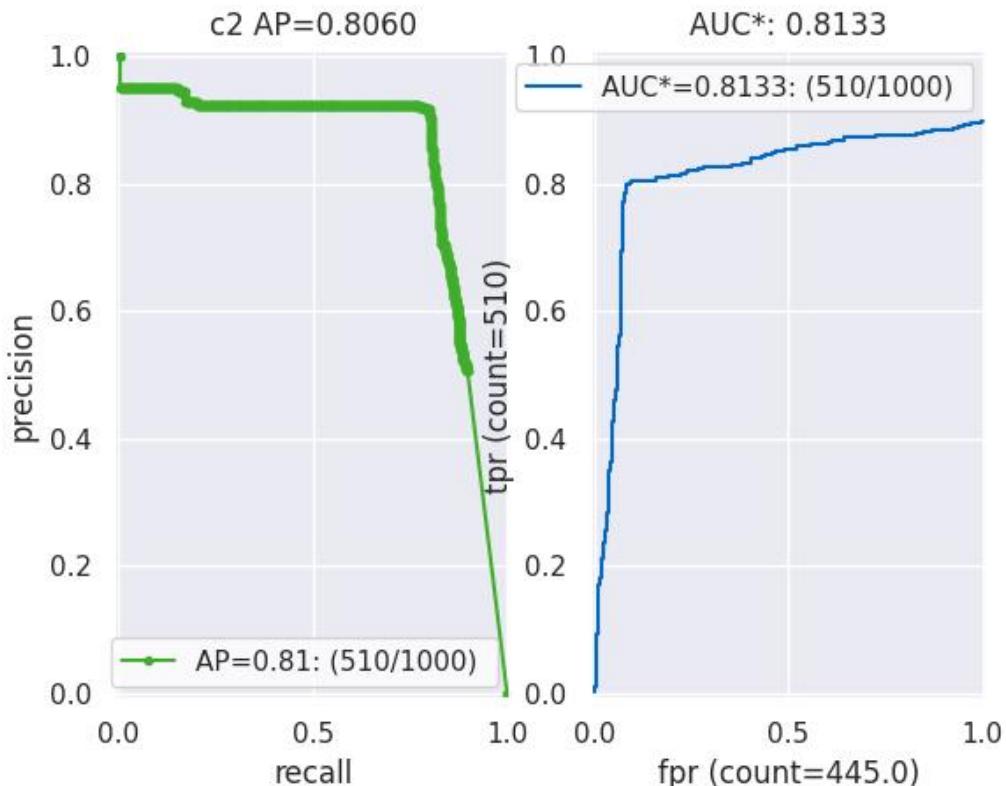

property catname

measures(*stabilize_thresh*=7, *fp_cutoff*=None, *monotonic_ppv*=True, *ap_method*='pycocotools')

Get statistics (F1, G1, MCC) versus thresholds

Parameters

- **stabilize_thresh** (*int*, *default*=7) – if fewer than this many data points inserts dummy stabilization data so curves can still be drawn.
- **fp_cutoff** (*int* | *None*) – maximum number of false positives in the truncated roc curves. The default of *None* is equivalent to `float('inf')`
- **monotonic_ppv** (*bool*) – if True ensures that precision is always increasing as recall decreases. This is done in pycocotools scoring, but I'm not sure its a good idea.

Example

```
>>> from kwcoc.metrics.confusion_vectors import * # NOQA
>>> self = BinaryConfusionVectors.demo(n=0)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
>>> self = BinaryConfusionVectors.demo(n=1, p_true=0.5, p_error=0.5)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
>>> self = BinaryConfusionVectors.demo(n=3, p_true=0.5, p_error=0.5)
>>> print('measures = {}'.format(ub.urepr(self.measures())))

>>> self = BinaryConfusionVectors.demo(n=100, p_true=0.5, p_error=0.5, p_miss=0.
    -> 3)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
>>> print('measures = {}'.format(ub.urepr(ub.odict(self.measures()))))
```

References

https://en.wikipedia.org/wiki/Confusion_matrix https://en.wikipedia.org/wiki/Precision_and_recall https://en.wikipedia.org/wiki/Matthews_correlation_coefficient

`_binary_clf_curves(stabilize_thresh=7, fp_cutoff=None)`

Compute TP, FP, TN, and FN counts for this binary confusion vector.

Code common to ROC, PR, and threshold measures, computes the elements of the binary confusion matrix at all relevant operating point thresholds.

Parameters

- `stabilize_thresh (int)` – if fewer than this many data points insert stabilization data.
- `fp_cutoff (int | None)` – maximum number of false positives

Example

```
>>> from kwcoc.metrics.confusion_vectors import * # NOQA
>>> self = BinaryConfusionVectors.demo(n=1, p_true=0.5, p_error=0.5)
>>> self._binary_clf_curves()

>>> self = BinaryConfusionVectors.demo(n=0, p_true=0.5, p_error=0.5)
>>> self._binary_clf_curves()

>>> self = BinaryConfusionVectors.demo(n=100, p_true=0.5, p_error=0.5)
>>> self._binary_clf_curves()
```

`draw_distribution()`

`_3dplot()`

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 1), n_fn=(0, 2), nimgs=256, nboxes=(0, 10),
>>>     bbox_noise=10,
>>>     classes=1)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> self = bin_cfsn = cfsn_vecs.binarize_classless()
>>> #dmet.summarize(plot=True)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.figure(fnum=3)
>>> self._3dplot()
```

`kwcoco.metrics.confusion_vectors._stabalize_data(y_true, y_score, sample_weight, npad=7)`

Adds ideally calibrated dummy values to curves with few positive examples. This acts somewhat like a Bayesian prior and smooths out the curve.

Example

```
y_score = np.array([0.5, 0.6]) y_true = np.array([1, 1]) sample_weight = np.array([1, 1]) npad = 7 _stabalize_data(y_true, y_score, sample_weight, npad=npad)
```

2.1.1.5.1.5 kwcoco.metrics.detect_metrics module

`class kwcoco.metrics.detect_metrics.DetectionMetrics(classes=None)`

Bases: `NiceRepr`

Object that computes associations between detections and can convert them into sklearn-compatible representations for scoring.

Variables

- `gid_to_true_dets` (`Dict[int, kwimage.Detections]`) – maps image ids to truth
- `gid_to_pred_dets` (`Dict[int, kwimage.Detections]`) – maps image ids to predictions
- `classes` (`kwcoco.CategoryTree / None`) – the categories to be scored, if unspecified attempts to determine these from the truth detections

Example

```
>>> # Demo how to use detection metrics directly given detections only
>>> # (no kwcoco file required)
>>> from kwcoco.metrics import detect_metrics
>>> import kwimage
>>> # Setup random true detections (these are just boxes and scores)
>>> true_dets = kwimage.Detections.random(3)
>>> # Peek at the simple internals of a detections object
>>> print('true_dets.data = {}'.format(ub.urepr(true_dets.data, nl=1)))
>>> # Create similar but different predictions
>>> true_subset = true_dets.take([1, 2]).warp(kwimage.Affine.coerce({'scale': 1.1}))
>>> false_positive = kwimage.Detections.random(3)
>>> pred_dets = kwimage.Detections.concatenate([true_subset, false_positive])
>>> dmet = DetectionMetrics()
>>> dmet.add_predictions(pred_dets, imgname='image1')
>>> dmet.add_truth(true_dets, imgname='image1')
>>> # Raw confusion vectors
>>> cfsn_vecs = dmet.confusion_vectors()
>>> print(cfsn_vecs.data.pandas().to_string())
>>> # Our scoring definition (derived from confusion vectors)
>>> print(dmet.score_kwococo())
>>> # VOC scoring
>>> print(dmet.score_voc(bias=0))
>>> # Original pycocotools scoring
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> print(dmet.score_pycocotools())
```

Example

```
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=100, nboxes=(0, 3), n_fp=(0, 1), classes=8, score_noise=0.9, ↴
>>>     hacked=False)
>>> print(dmet.score_kwococo(bias=0, compat='mutex', prioritize='iou')['mAP'])
...
>>> # NOTE: IN GENERAL NETHARN AND VOC ARE NOT THE SAME
>>> print(dmet.score_voc(bias=0) ['mAP'])
0.8582...
>>> #print(dmet.score_coco() ['mAP'])
```

clear()

enrich_confusion_vectors(*cfsn_vecs*)

Adds annotation id information into confusion vectors computed via this detection metrics object.

TODO: should likely use this at the end of the function that builds the confusion vectors.

classmethod **from_coco**(*true_coco*, *pred_coco*, *gids=None*, *verbose=0*)

Create detection metrics from two coco files representing the truth and predictions.

Parameters

- **true_coco** (*kwcoco.CocoDataset*) – coco dataset with ground truth
- **pred_coco** (*kwcoco.CocoDataset*) – coco dataset with predictions

Example

```
>>> import kwCOCO
>>> from kwCOCO.demo.perterb import perterb_coco
>>> true_coco = kwCOCO.CocoDataset.demo('shapes')
>>> perterbkw = dict(box_noise=0.5, cls_noise=0.5, score_noise=0.5)
>>> pred_coco = perterb_coco(true_coco, **perterbkw)
>>> self = DetectionMetrics.from_coco(true_coco, pred_coco)
>>> self.score_voc()
```

`_register_imagename(imgname, gid=None)`

`add_predictions(pred_dets, imgname=None, gid=None)`

Register/Add predicted detections for an image

Parameters

- `pred_dets` (`kwimage.Detections`) – predicted detections
- `imgname` (`str | None`) – a unique string to identify the image
- `gid` (`int | None`) – the integer image id if known

`add_truth(true_dets, imgname=None, gid=None)`

Register/Add groundtruth detections for an image

Parameters

- `true_dets` (`kwimage.Detections`) – groundtruth
- `imgname` (`str | None`) – a unique string to identify the image
- `gid` (`int | None`) – the integer image id if known

`true_detections(gid)`

gets Detections representation for groundtruth in an image

`pred_detections(gid)`

gets Detections representation for predictions in an image

property classes

`confusion_vectors(iou_thresh=0.5, bias=0, gids=None, compat='mutex', prioritize='iou', ignore_classes='ignore', background_class=NoParam, verbose='auto', workers=0, track_probs='try', max_dets=None)`

Assigns predicted boxes to the true boxes so we can transform the detection problem into a classification problem for scoring.

Parameters

- `iou_thresh` (`float | List[float]`) – bounding box overlap iou threshold required for assignment if a list, then return type is a dict. Defaults to 0.5
- `bias` (`float`) – for computing bounding box overlap, either 1 or 0. Defaults to 0.
- `gids` (`List[int] | None`) – which subset of images ids to compute confusion metrics on. If not specified all images are used. Defaults to None.
- `compat` (`str`) – can be ('ancestors' | 'mutex' | 'all'). determines which pred boxes are allowed to match which true boxes. If 'mutex', then pred boxes can only match true boxes of the same class. If 'ancestors', then pred boxes can match true boxes that match or have

a coarser label. If ‘all’, then any pred can match any true, regardless of its category label. Defaults to all.

- **prioritize** (*str*) – can be (‘iou’ | ‘class’ | ‘correct’) determines which box to assign to if multiple true boxes overlap a predicted box. if prioritize is iou, then the true box with maximum iou (above iou_thresh) will be chosen. If prioritize is class, then it will prefer matching a compatible class above a higher iou. If prioritize is correct, then ancestors of the true class are preferred over descendants of the true class, over unrelated classes. Default to ‘iou’
- **ignore_classes** (*set* | *str*) – class names indicating ignore regions. Default={‘ignore’}
- **background_class** (*str* | *NoParamType*) – Name of the background class. If unspecified we try to determine it with heuristics. A value of None means there is no background class.
- **verbose** (*int* | *str*) – verbosity flag. Default to ‘auto’. In auto mode, verbose=1 if len(gids) > 1000.
- **workers** (*int*) – number of parallel assignment processes. Defaults to 0
- **track_probs** (*str*) – can be ‘try’, ‘force’, or False. if truthy, we assume probabilities for multiple classes are available. default=‘try’

Returns

ConfusionVectors | Dict[float, ConfusionVectors]

Example

```
>>> dmet = DetectionMetrics.demo(nimgs=30, classes=3,
>>>                               nboxes=10, n_fp=3, box_noise=10,
>>>                               with_probs=False)
>>> iou_to_cfsn = dmet.confusion_vectors(iou_thresh=[0.3, 0.5, 0.9])
>>> for t, cfsn in iou_to_cfsn.items():
>>>     print('t = {!r}'.format(t))
>...     print(cfsn.binarize_ovr().measures())
>...     print(cfsn.binarize_classless().measures())
```

score_kwant(*iou_thresh*=0.5)

Scores the detections using kwant

score_kwcoco(*iou_thresh*=0.5, *bias*=0, *gids*=None, *compat*=‘all’, *prioritize*=‘iou’)

our scoring method

score_voc(*iou_thresh*=0.5, *bias*=1, *method*=‘voc2012’, *gids*=None, *ignore_classes*=‘ignore’)

score using voc method

Example

```
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=100, nboxes=(0, 3), n_fp=(0, 1), classes=8,
>>>     score_noise=.5)
>>> print(dmet.score_voc()['mAP'])
0.9399...
```

_to_coco()

Convert to a coco representation of truth and predictions
with inverse aid mappings

score_pycocotools(*with_evaler=False*, *with_confusion=False*, *verbose=0*, *iou_thresholds=None*)
score using ms-coco method

Returns

dictionary with pct info

Return type

Dict

Example

```
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> from kwcoco.metrics.detect_metrics import *
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 3), n_fn=(0, 1), n_fp=(0, 1), classes=8, with_
>>>     _probs=False)
>>> pct_info = dmet.score_pycocotools(verbose=1,
>>>                                     with_evaler=True,
>>>                                     with_confusion=True,
>>>                                     iou_thresholds=[0.5, 0.9])
>>> evaler = pct_info['evaler']
>>> iou_to_cfsn_vecs = pct_info['iou_to_cfsn_vecs']
>>> for iou_thresh in iou_to_cfsn_vecs.keys():
>>>     print('iou_thresh = {!r}'.format(iou_thresh))
>>>     cfsn_vecs = iou_to_cfsn_vecs[iou_thresh]
>>>     ovr_measures = cfsn_vecs.binarize_ovr().measures()
>>>     print('ovr_measures = {}'.format(ub.urepr(ovr_measures, nl=1,_
>>>     -precision=4)))
```

Note: by default pycocotools computes average precision as the literal average of computed precisions at 101 uniformly spaced recall thresholds.

pycocoutils seems to only allow predictions with the same category as the truth to match those truth objects. This should be the same as calling dmet.confusion_vectors with compat = mutex

pycocoutils does not take into account the fact that each box often has a score for each category.

pycocoutils will be incorrect if any annotation has an id of 0

a major difference in the way kwcoco scores versus pycocoutils is the calculation of AP. The assignment between truth and predicted detections produces similar enough results. Given our confusion vectors we use the scikit-learn definition of AP, whereas pycocoutils seems to compute precision and recall — more or less correctly — but then it resamples the precision at various specified recall thresholds (in the *accumulate* function, specifically how *pr* is resampled into the *q* array). This can lead to a large difference in reported scores.

pycocoutils also smooths out the precision such that it is monotonic decreasing, which might not be the best idea.

pycocotools area ranges are inclusive on both ends, that means the “small” and “medium” truth selections do overlap somewhat.

`score_coco(with_evaler=False, with_confusion=False, verbose=0, iou_thresholds=None)`
score using ms-coco method

Returns

dictionary with pct info

Return type

Dict

Example

```
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> from kwcoco.metrics.detect_metrics import *
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 3), n_fn=(0, 1), n_fp=(0, 1), classes=8, with_
>>> -probs=False)
>>> pct_info = dmet.score_pycocotools(verbose=1,
>>>                                     with_evaler=True,
>>>                                     with_confusion=True,
>>>                                     iou_thresholds=[0.5, 0.9])
>>> evaler = pct_info['evaler']
>>> iou_to_cfsn_vecs = pct_info['iou_to_cfsn_vecs']
>>> for iou_thresh in iou_to_cfsn_vecs.keys():
>>>     print('iou_thresh = {!r}'.format(iou_thresh))
>>>     cfsn_vecs = iou_to_cfsn_vecs[iou_thresh]
>>>     ovr_measures = cfsn_vecs.binarize_ovr().measures()
>>>     print('ovr_measures = {}'.format(ub.urepr(ovr_measures, nl=1,_
>>> -precision=4)))
```

Note: by default pycocotools computes average precision as the literal average of computed precisions at 101 uniformly spaced recall thresholds.

pycocoutils seems to only allow predictions with the same category as the truth to match those truth objects. This should be the same as calling dmet.confusion_vectors with compat = mutex

pycocoutils does not take into account the fact that each box often has a score for each category.

pycocoutils will be incorrect if any annotation has an id of 0

a major difference in the way kwcoco scores versus pycocoutils is the calculation of AP. The assignment between truth and predicted detections produces similar enough results. Given our confusion vectors we use the scikit-learn definition of AP, whereas pycocoutils seems to compute precision and recall — more or less correctly — but then it resamples the precision at various specified recall thresholds (in the *accumulate* function, specifically how *pr* is resampled into the *q* array). This can lead to a large difference in reported scores.

pycocoutils also smooths out the precision such that it is monotonic decreasing, which might not be the best idea.

pycocotools area ranges are inclusive on both ends, that means the “small” and “medium” truth selections do overlap somewhat.

`classmethod demo(**kwargs)`

Creates random true boxes and predicted boxes that have some noisy offset from the truth.

Kwargs:

classes (int):

class list or the number of foreground classes. Defaults to 1.

nimgs (int): number of images in the coco datasets. Defaults to 1.

nboxes (int): boxes per image. Defaults to 1.

n_fp (int): number of false positives. Defaults to 0.

n_fn (int):

number of false negatives. Defaults to 0.

box_noise (float):

std of a normal distribution used to perturb both box location and box size. Defaults to 0.

cls_noise (float):

probability that a class label will change. Must be within 0 and 1. Defaults to 0.

anchors (ndarray):

used to create random boxes. Defaults to None.

null_pred (bool):

if True, predicted classes are returned as null, which means only localization scoring is suitable. Defaults to 0.

with_probs (bool):

if True, includes per-class probabilities with predictions Defaults to 1.

rng (int | None | RandomState): random seed / state

CommandLine


```
xdoctest -m kwCOCO.metrics.detect_metrics DetectionMetrics.demo:2 --show
```

Example

```
>>> kwargs = {}
>>> # Seed the RNG
>>> kwargs['rng'] = 0
>>> # Size parameters determine how big the data is
>>> kwargs['nimgs'] = 5
>>> kwargs['nboxes'] = 7
>>> kwargs['classes'] = 11
>>> # Noise parameters perturb predictions further from the truth
>>> kwargs['n_fp'] = 3
>>> kwargs['box_noise'] = 0.1
>>> kwargs['cls_noise'] = 0.5
>>> dmet = DetectionMetrics.demo(**kwargs)
>>> print('dmet.classes = {}'.format(dmet.classes))
dmet.classes = <CategoryTree(nNodes=12, maxDepth=3, maxBreadth=4...)>
>>> # Can grab kwimage.Detection object for any image
>>> print(dmet.true_detections(gid=0))
<Detections(4)>
>>> print(dmet.pred_detections(gid=0))
<Detections(7)>
```

Example

```
>>> # Test case with null predicted categories
>>> dmet = DetectionMetrics.demo(nimgs=30, null_pred=1, classes=3,
>>>                               nboxes=10, n_fp=3, box_noise=0.1,
>>>                               with_probs=False)
>>> dmet.gid_to_pred_dets[0].data
>>> dmet.gid_to_true_dets[0].data
>>> cfsn_vecs = dmet.confusion_vectors()
>>> binvecs_ovr = cfsn_vecs.binarize_ovr()
>>> binvecs_per = cfsn_vecs.binarize_classless()
>>> measures_per = binvecs_per.measures()
>>> measures_ovr = binvecs_ovr.measures()
>>> print('measures_per = {!r}'.format(measures_per))
>>> print('measures_ovr = {!r}'.format(measures_ovr))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> measures_ovr['perclass'].draw(key='pr', fnum=2)
```

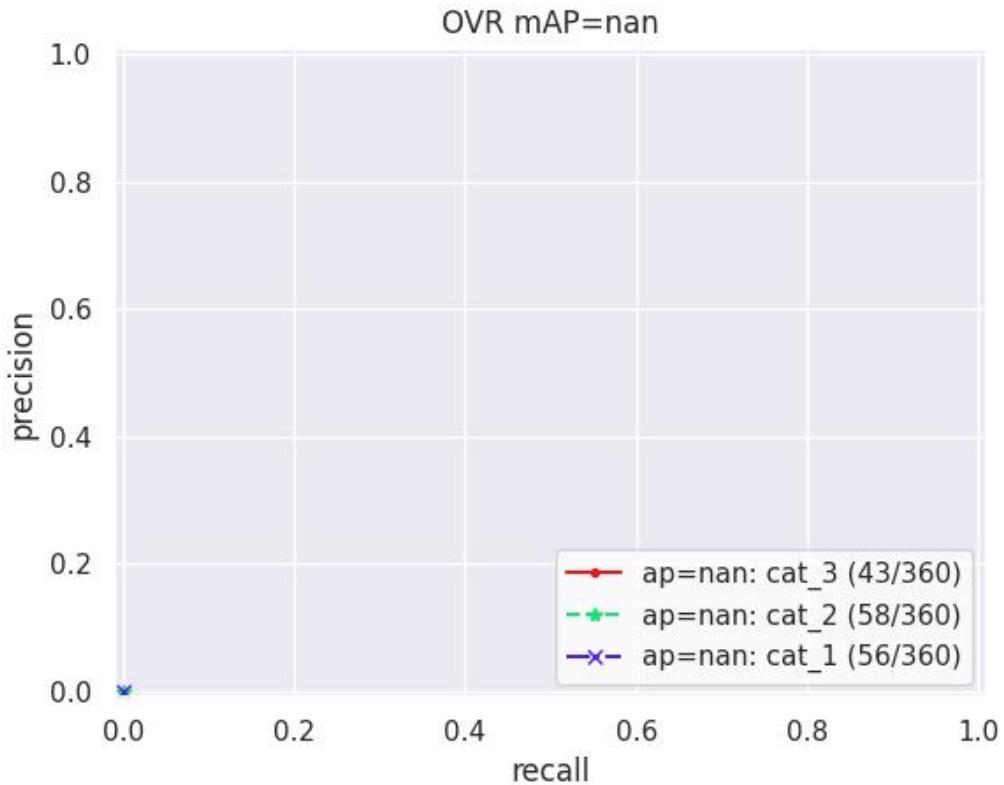

Example

```
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 1), n_fn=(0, 1), nimgs=32, nboxes=(0, 16),
>>>     classes=3, rng=0, newstyle=1, box_noise=0.5, cls_noise=0.0, score_
>>> _noise=0.3, with_probs=False)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> summary = dmet.summarize(plot=True, title='DetectionMetrics summary demo',_
>>> with_ovr=True, with_bin=False)
>>> summary['bin_measures']
>>> kwplot.show_if_requested()
```

summarize(*out_dpath=None*, *plot=False*, *title=''*, *with_bin='auto'*, *with_ovr='auto'*)


Create summary one-versus-rest and binary metrics.

Parameters

- **out_dpath** (*pathlib.Path | None*) – FIXME: not hooked up
- **with_ovr** (*str | bool*) – include one-versus-rest metrics (wrt the classes). If ‘auto’ enables if possible. FIXME: auto is not working.
- **with_bin** (*str | bool*) – include binary classless metrics (i.e. detected or not). If ‘auto’ enables if possible. FIXME: auto is not working.
- **plot** (*bool*) – if true, also write plots. Defaults to False.
- **title** (*str*) – passed if plot is given

Example

```
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 128), n_fn=(0, 4), nimgs=512, nboxes=(0, 32),
>>>     classes=3, rng=0)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> dmet.summarize(plot=True, title='DetectionMetrics summary demo')
>>> kwplot.show_if_requested()
```

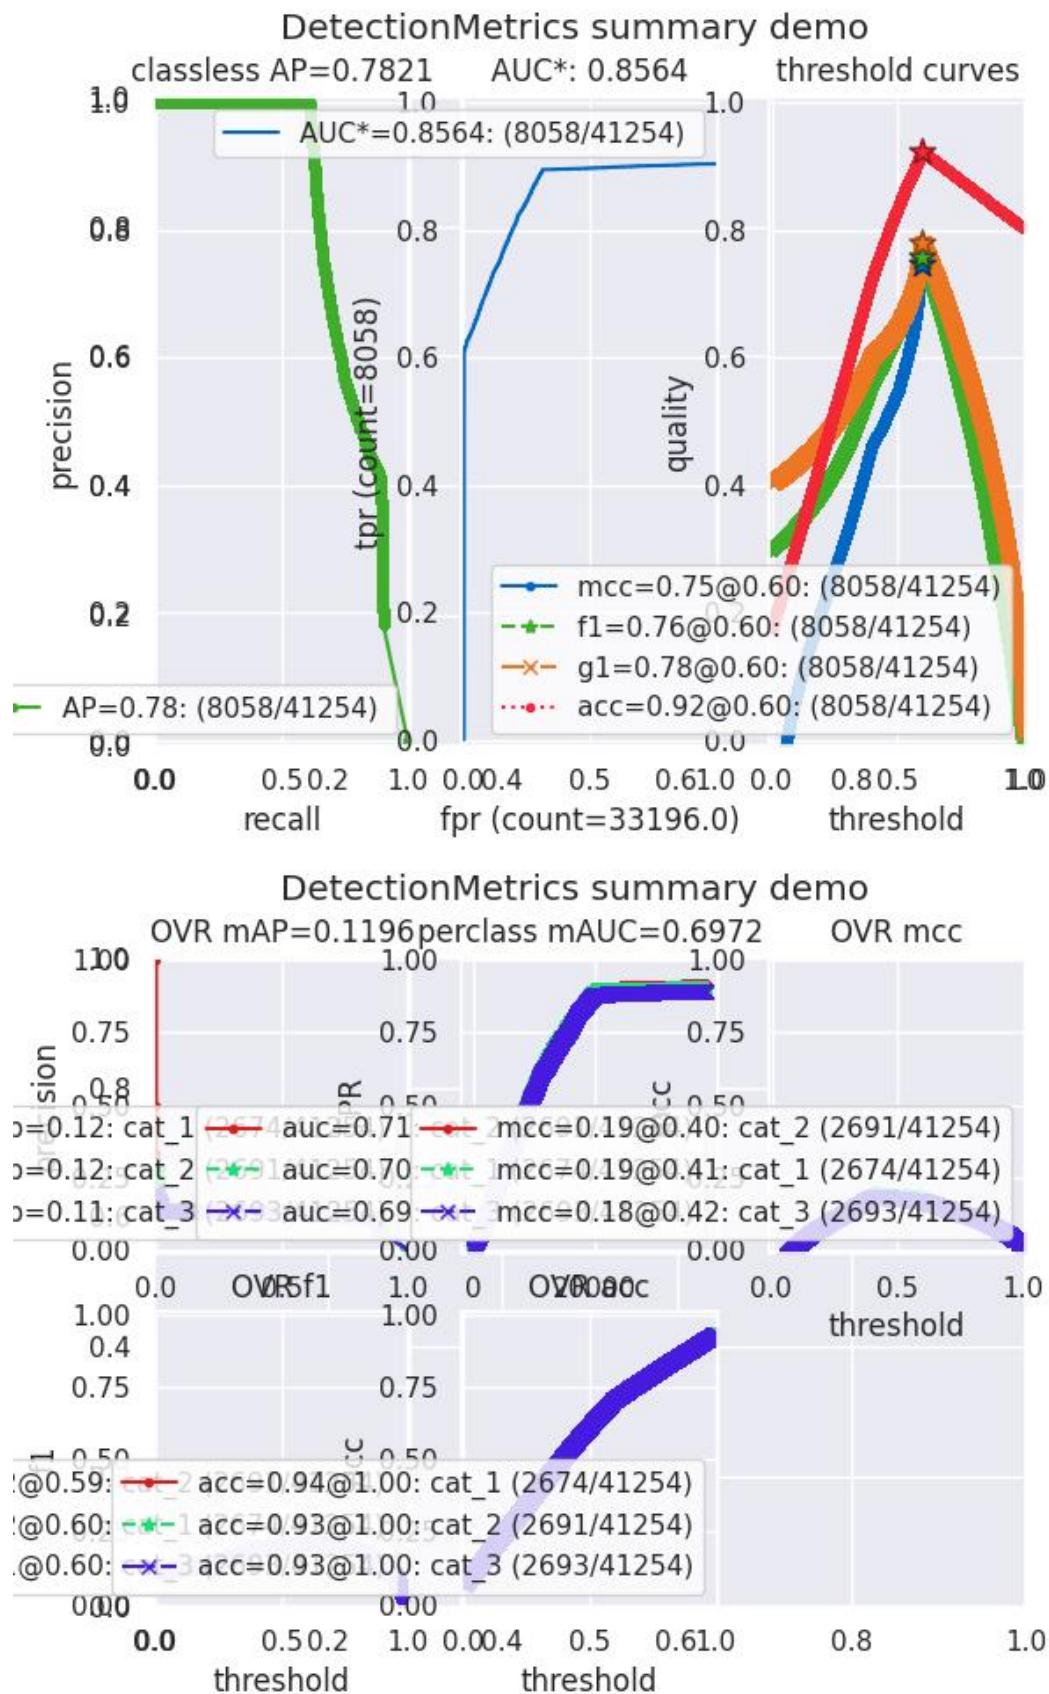

```
kwCOCO.metrics.detect_metrics._demo_construct_probs(pred_cxs, pred_scores, classes, rng, hacked=1)
    Constructs random probabilities for demo data

kwCOCO.metrics.detect_metrics.pycocotools_confusion_vectors(dmet, evaler, iou_thresh=0.5,
                                                               verbose=0)
```

Example

```
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> from kwCOCO.metrics.detect_metrics import *
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 3), n_fn=(0, 1), n_fp=(0, 1), classes=8, with_
>>>     probs=False)
>>> coco_scores = dmet.score_pycocotools(with_evaler=True)
>>> evaler = coco_scores['evaler']
>>> cfsn_vecs = pycocotools_confusion_vectors(dmet, evaler, verbose=1)
```

`kwCOCO.metrics.detect_metrics.eval_detections_cli(**kw)`

DEPRECATED USE `kwCOCO eval` instead

CommandLine

```
xdoctest -m ~/code/kwCOCO/kwCOCO/metrics/detect_metrics.py eval_detections_cli
```

`kwCOCO.metrics.detect_metrics._summarize(self, ap=1, iouThr=None, areaRngLbl='all', maxDets=100)`

`kwCOCO.metrics.detect_metrics.pct_summarize2(self)`

2.1.1.5.1.6 kwCOCO.metrics.drawing module

`kwCOCO.metrics.drawing.draw_perclass_roc(cx_to_info, classes=None, prefix='', fnum=1, fp_axis='count', **kw)`

Parameters

- `cx_to_info` (`kwCOCO.metrics.confusion_measures.PerClass_Measures | Dict`)
- `fp_axis` (`str`) – can be count or rate

`kwCOCO.metrics.drawing.demo_format_options()`

`kwCOCO.metrics.drawing.concise_si_display(val, eps=1e-08, precision=2, si_thresh=4)`

Display numbers in scientific notation if above a threshold

Parameters

- `eps` (`float`) – threshold to be formatted as an integer if other integer conditions hold.
- `precision` (`int`) – maximum significant digits (might print less)
- `si_thresh` (`int`) – If the number is less than $10^{\{si_thresh\}}$, then it will be printed as an integer if it is within `eps` of an integer.

References

<https://docs.python.org/2/library/stdtypes.html#string-formatting-operations>

Example

```
>>> grid = {
>>>     'sign': [1, -1],
>>>     'exp': [1, -1],
>>>     'big_part': [0, 32132e3, 4000000032],
>>>     'med_part': [0, 0.5, 0.9432, 0.000043, 0.01, 1, 2],
>>>     'small_part': [0, 1321e-3, 43242e-11],
>>> }
>>> for kw in ub.named_product(grid):
>>>     sign = kw.pop('sign')
>>>     exp = kw.pop('exp')
>>>     raw = (sum(map(float, kw.values())))
>>>     val = sign * raw ** exp if raw != 0 else sign * raw
>>>     print('{:>20} - {}'.format(concise_si_display(val), val))
>>> from kwcoc.metrics.drawing import * # NOQA
>>> print(concise_si_display(40000000432432))
>>> print(concise_si_display(473243280432890))
>>> print(concise_si_display(473243284289))
>>> print(concise_si_display(473243289))
>>> print(concise_si_display(4739))
>>> print(concise_si_display(473))
>>> print(concise_si_display(0.432432))
>>> print(concise_si_display(0.132432))
>>> print(concise_si_display(1.0000043))
>>> print(concise_si_display(01.0000000000000000000000000000043))
```

`kwcoc.metrics.drawing._realpos_label_suffix(info)`

Creates a label suffix that indicates the number of real positive cases versus the total amount of cases considered for an evaluation curve.

Parameters

`info (Dict)` – with keys, nsupport, realpos_total

Example

```
>>> from kwcoc.metrics.drawing import * # NOQA
>>> info = {'nsupport': 10, 'realpos_total': 10}
>>> _realpos_label_suffix(info)
10/10
>>> info = {'nsupport': 10.0, 'realpos_total': 10.0}
>>> _realpos_label_suffix(info)
10/10
>>> info = {'nsupport': 10.3333, 'realpos_total': 10.22222}
>>> _realpos_label_suffix(info)
10.22/10.33
>>> info = {'nsupport': 10.00000001, 'realpos_total': None}
```

(continues on next page)

(continued from previous page)

```
>>> _realpos_label_suffix(info)
10
>>> info = {'nsupport': 10.009}
>>> _realpos_label_suffix(info)
10.01
>>> info = {'nsupport': 3331033334342.432, 'realpos_total': 1033334342.432}
>>> _realpos_label_suffix(info)
1e9/3.3e12
>>> info = {'nsupport': 0.007, 'realpos_total': 0.0000893}
>>> _realpos_label_suffix(info)
8.9e-5/0.007
```


`kwcoco.metrics.drawing.draw_perclass_prcurve(cx_to_info, classes=None, prefix='', fnum=1, **kw)`

Parameters

`cx_to_info` (*kwcoco.metrics.confusion_measures.PerClass_Measures | Dict*)

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> from kwcoco.metrics.drawing import * # NOQA
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo()
>>> nimgs=3, nboxes=(0, 10), n_fp=(0, 3), n_fn=(0, 2), classes=3, score_noise=0.
->1, box_noise=0.1, with_probs=False)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> print(cfsn_vecs.data.pandas())
>>> classes = cfsn_vecs.classes
>>> cx_to_info = cfsn_vecs.binarize_ovr().measures()['perclass']
>>> print('cx_to_info = {}'.format(ub.urepr(cx_to_info, nl=1)))
>>> import kwplot
>>> kwplot.autopl()
>>> draw_perclass_prcurve(cx_to_info, classes)
>>> # xdoctest: +REQUIRES(--show)
>>> kwplot.show_if_requested()
```

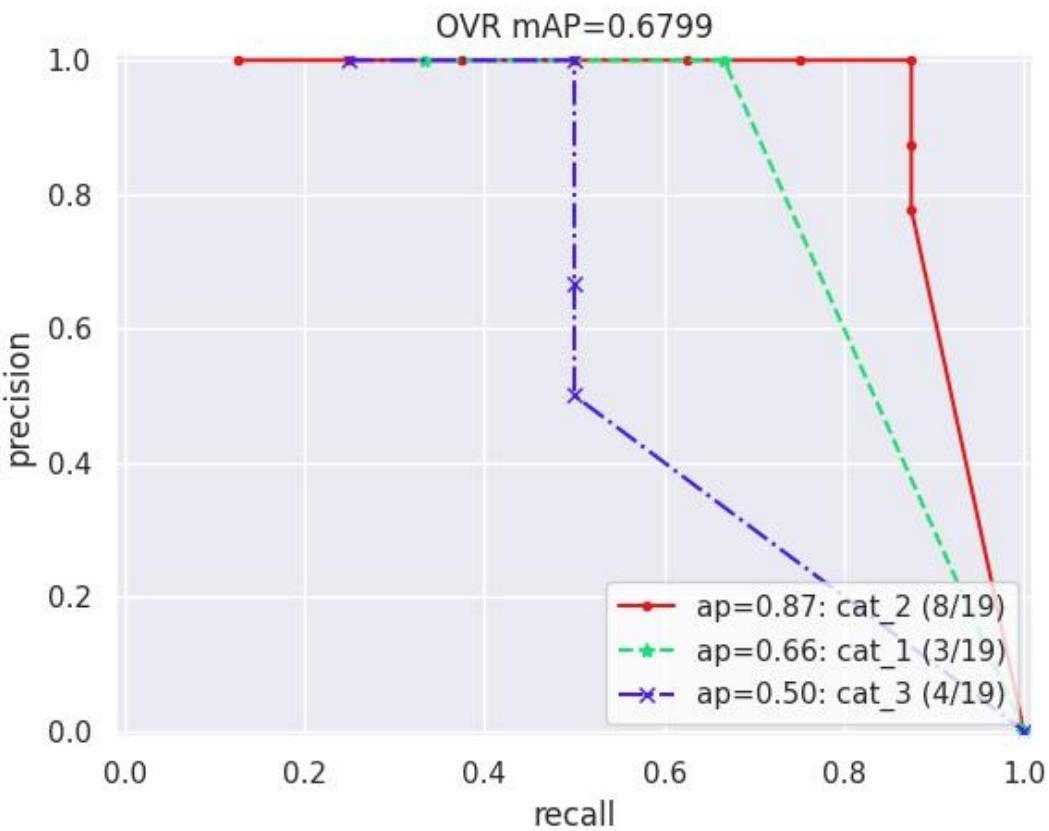

```
kwcoco.metrics.drawing.draw_perclass_thresholds(cx_to_info, key='mcc', classes=None, prefix='', fnum=1, **kw)
```


Parameters

`cx_to_info` (`kwcoco.metrics.confusion_measures.PerClass_Measures` | `Dict`)

Note: Each category is inspected independently of one another, there is no notion of confusion.

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> from kwCOCO.metrics.drawing import * # NOQA
>>> from kwCOCO.metrics import ConfusionVectors
>>> cfsn_vecs = ConfusionVectors.demo()
>>> classes = cfsn_vecs.classes
>>> ovr_cfsn = cfsn_vecs.binarize_ovr(keyby='name')
>>> cx_to_info = ovr_cfsn.measures()['perclass']
>>> import kwplot
>>> kwplot.autopl()l()
>>> key = 'mcc'
>>> draw_perclass_thresholds(cx_to_info, key, classes)
>>> # xdoctest: +REQUIRES(--show)
>>> kwplot.show_if_requested()
```

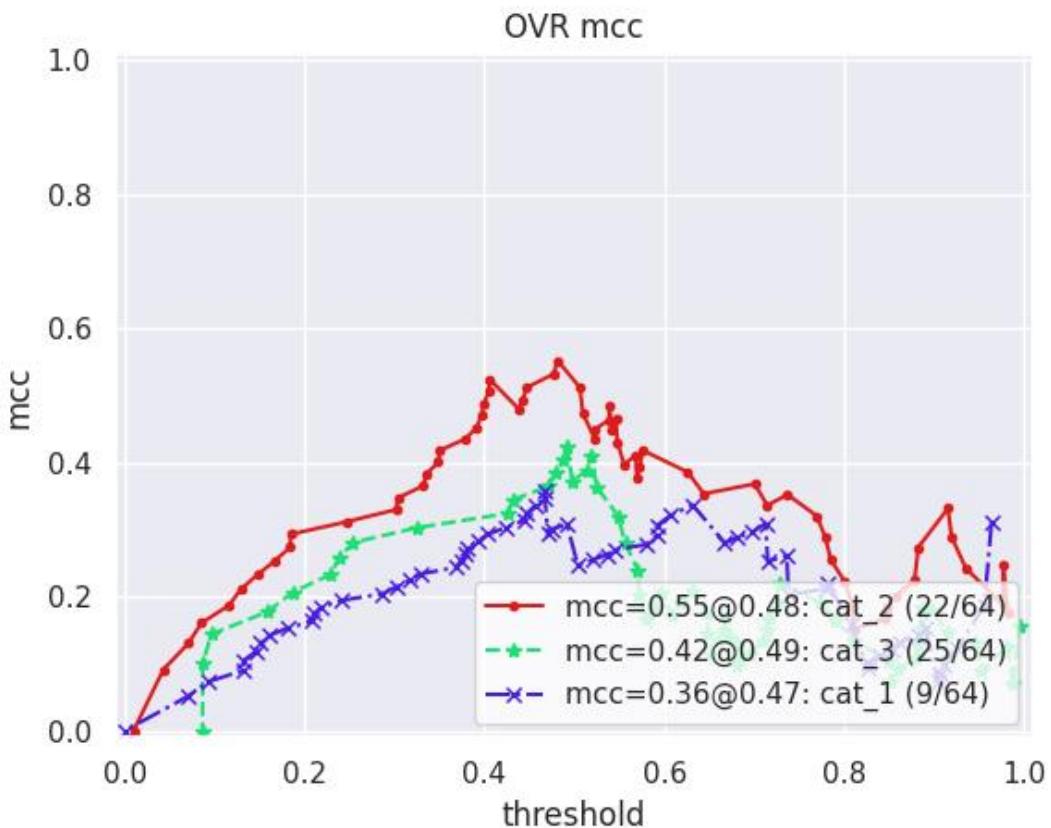

```
kwcoco.metrics.drawing.draw_roc(info, prefix='', fnum=1, **kw)
```

Parameters

info (*Measures | Dict*)

Note: There needs to be enough negative examples for using ROC to make any sense!


Example

```
>>> #!!! TODO# xdoctest: +REQUIRES(module:kwplot, module:seaborn)
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> # xdoctest: +REQUIRES(module:seaborn)
>>> from kwcoco.metrics.drawing import * # NOQA
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(nimgs=30, null_pred=1, classes=3,
>>>                         nboxes=10, n_fp=10, box_noise=0.3,
>>>                         with_probs=False)
>>> dmet.true_detections().data
>>> cfsn_vecs = dmet.confusion_vectors(compat='mutex', prioritize='iou', bias=0)
>>> print(cfsn_vecs.data._pandas().sort_values('score'))
>>> classes = cfsn_vecs.classes
>>> info = ub.peek(cfsn_vecs.binarize_ovr().measures()['perclass'].values())
>>> # xdoctest: +REQUIRES(--show)
```

(continues on next page)

(continued from previous page)

```
>>> import kwplot
>>> kwplot.autompl()
>>> draw_roc(info)
>>> kwplot.show_if_requested()
```

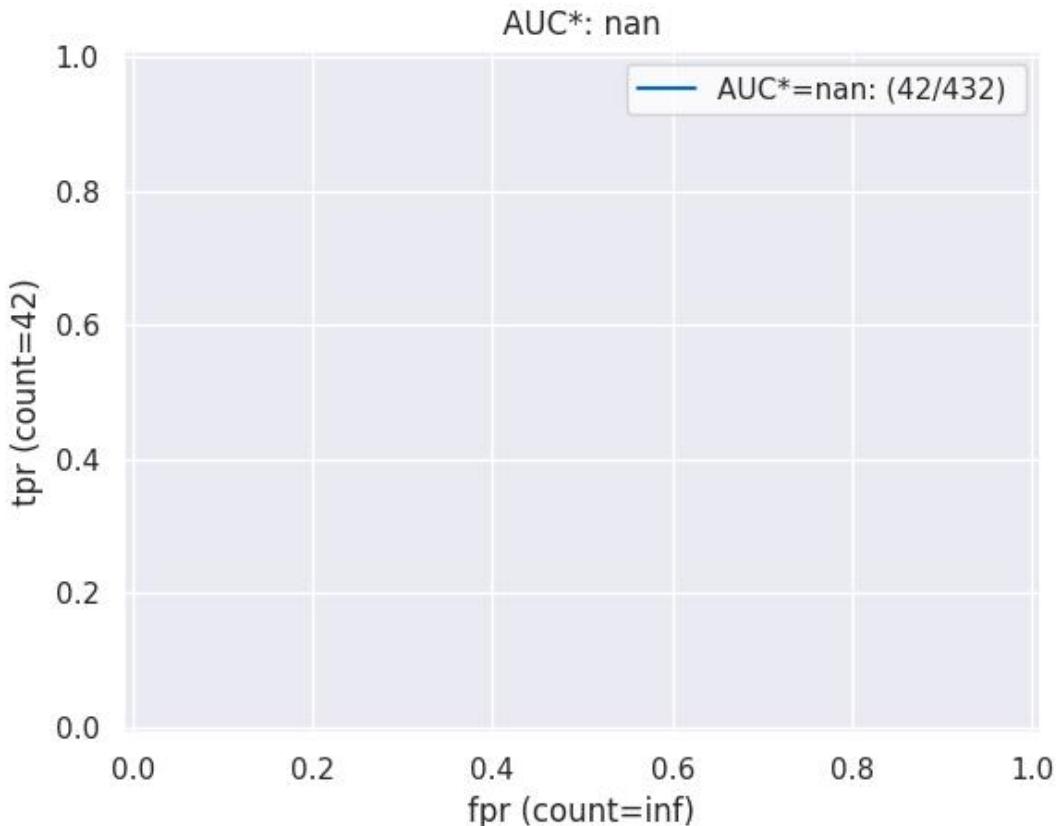

`kwcoco.metrics.drawing.draw_prcurve(info, prefix='', fnum=1, **kw)`

Draws a single pr curve.

Parameters

`info (Measures | Dict)`

Example


```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo()
>>> nimgs=10, nboxes=(0, 10), n_fp=(0, 1), classes=3
>>> cfsn_vecs = dmet.confusion_vectors()
```

```
>>> classes = cfsn_vecs.classes
>>> info = cfsn_vecs.binarize_classless().measures()
>>> import kwplot
>>> kwplot.autompl()
```

(continues on next page)

(continued from previous page)

```
>>> draw_prcurve(info)
>>> # xdoctest: +REQUIRES(--show)
>>> kwplot.show_if_requested()
```

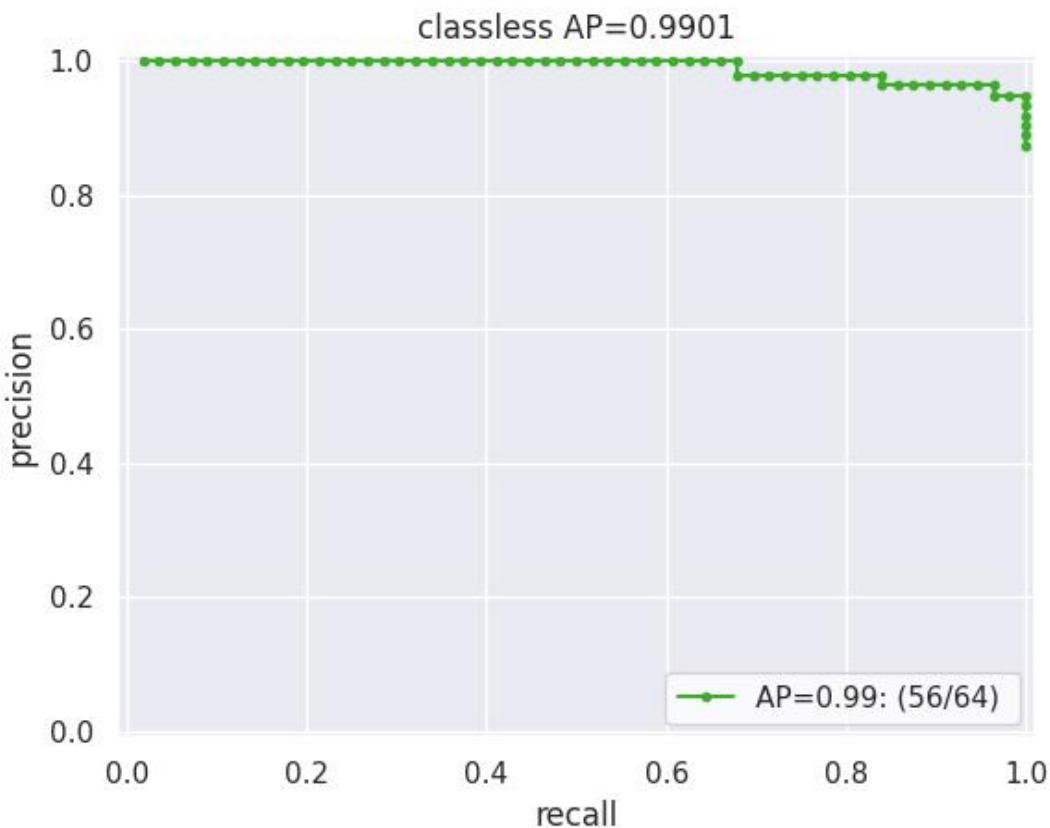

```
kwcoco.metrics.drawing.draw_threshold_curves(info, keys=None, prefix='', fnum=1, **kw)
```

Parameters


- **info** (*Measures* | *Dict*)
- **keys** (*None* | *List[str]*) – the metrics to view over thresholds

CommandLine

```
xdoctest -m kwcoco.metrics.drawing draw_threshold_curves --show
```

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> from kwcoco.metrics.drawing import * # NOQA
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo()
>>> nimgs=10, nboxes=(0, 10), n_fp=(0, 1), classes=3
>>> cfsn_vecs = dmet.confusion_vectors()
>>> info = cfsn_vecs.binarize_classless().measures()
>>> keys = None
>>> import kwplot
>>> kwplot.autopl()
>>> keys = {'g1', 'f1', 'acc', 'mcc', 'tpr'}
>>> draw_threshold_curves(info, keys)
>>> # xdoctest: +REQUIRES(--show)
>>> kwplot.show_if_requested()
```

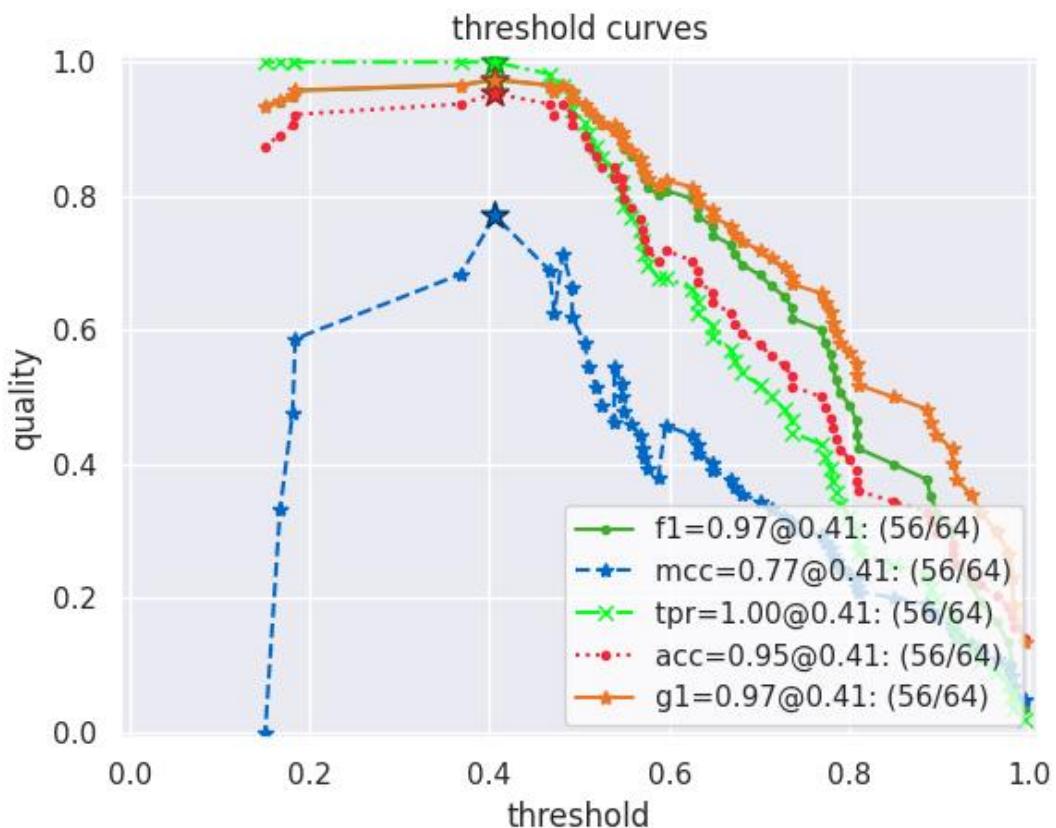

```
kwcoco.metrics.drawing.deterministic_colors(keys, preset_colors)
```

2.1.1.5.1.7 kwcoco.metrics.functional module

`kwcoco.metrics.functional.fast_confusion_matrix(y_true, y_pred, n_labels, sample_weight=None)`

faster version of sklearn confusion matrix that avoids the expensive checks and label rectification

Parameters

- **y_true** (*ndarray*) – ground truth class label for each sample
- **y_pred** (*ndarray*) – predicted class label for each sample
- **n_labels** (*int*) – number of labels
- **sample_weight** (*ndarray | None*) – weight of each sample Extended typing *ndarray[Any, int | Float]*

Returns

matrix where rows represent real and cols represent pred and the value at each cell is the total amount of weight Extended typing *ndarray[Shape['*', '*'], Int64 | Float64]*

Return type

ndarray

Example

```
>>> y_true = np.array([0, 0, 0, 0, 1, 1, 1, 0, 1])
>>> y_pred = np.array([0, 0, 0, 0, 0, 0, 0, 1, 1])
>>> fast_confusion_matrix(y_true, y_pred, 2)
array([[4, 2],
       [3, 1]]...)
>>> fast_confusion_matrix(y_true, y_pred, 2).ravel()
array([4, 2, 3, 1]...)
```

`kwcoco.metrics.functional._truncated_roc(y_df, bg_idx=-1, fp_cutoff=None)`

Computes truncated ROC info

`kwcoco.metrics.functional._pr_curves(y)`

Compute a PR curve from a method

Parameters

y (*pd.DataFrame | DataFrameArray*) – output of detection_confusions

Returns

Tuple[float, ndarray, ndarray]

Example

```
>>> # xdoctest: +REQUIRES(module:sklearn)
>>> import pandas as pd
>>> y1 = pd.DataFrame.from_records([
>>>     {'pred': 0, 'score': 10.00, 'true': -1, 'weight': 1.00},
>>>     {'pred': 0, 'score': 1.65, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 8.64, 'true': -1, 'weight': 1.00},
>>>     {'pred': 0, 'score': 3.97, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 1.68, 'true': 0, 'weight': 1.00},
```

(continues on next page)

(continued from previous page)

```
>>> {'pred': 0, 'score': 5.06, 'true': 0, 'weight': 1.00},  
>>> {'pred': 0, 'score': 0.25, 'true': 0, 'weight': 1.00},  
>>> {'pred': 0, 'score': 1.75, 'true': 0, 'weight': 1.00},  
>>> {'pred': 0, 'score': 8.52, 'true': 0, 'weight': 1.00},  
>>> {'pred': 0, 'score': 5.20, 'true': 0, 'weight': 1.00},  
>>> ])  
>>> import kwcoco as nh  
>>> import kwarrray  
>>> y2 = kwarrray.DataFrameArray(y1)  
>>> _pr_curves(y2)  
>>> _pr_curves(y1)
```

`kwcoco.metrics.functional._average_precision(tpr, ppv)`

Compute average precision of a binary PR curve. This is simply the area under the curve.

Parameters

- `tpr (ndarray)` – true positive rate - aka recall
- `ppv (ndarray)` – positive predictive value - aka precision

2.1.1.5.1.8 `kwcoco.metrics.sklearn_alts module`

Faster pure-python versions of sklearn functions that avoid expensive checks and label rectifications. It is assumed that all labels are consecutive non-negative integers.

`kwcoco.metrics.sklearn_alts.confusion_matrix(y_true, y_pred, n_labels=None, labels=None, sample_weight=None)`

faster version of sklearn confusion matrix that avoids the expensive checks and label rectification

Runs in about 0.7ms

Returns

matrix where rows represent real and cols represent pred

Return type

ndarray

Example

```
>>> y_true = np.array([0, 0, 0, 0, 1, 1, 1, 0, 0, 1])  
>>> y_pred = np.array([0, 0, 0, 0, 0, 0, 0, 1, 1, 1])  
>>> confusion_matrix(y_true, y_pred, 2)  
array([[4, 2],  
       [3, 1]]...)  
>>> confusion_matrix(y_true, y_pred, 2).ravel()  
array([4, 2, 3, 1]...)
```

Benchmark

```
>>> # xdoctest: +SKIP
>>> import ubelt as ub
>>> y_true = np.random.randint(0, 2, 10000)
>>> y_pred = np.random.randint(0, 2, 10000)
>>> n = 1000
>>> for timer in ub.Timerit(n, bestof=10, label='py-time'):
>>>     sample_weight = [1] * len(y_true)
>>>     confusion_matrix(y_true, y_pred, 2, sample_weight=sample_weight)
>>> for timer in ub.Timerit(n, bestof=10, label='np-time'):
>>>     sample_weight = np.ones(len(y_true), dtype=int)
>>>     confusion_matrix(y_true, y_pred, 2, sample_weight=sample_weight)
```

`kwcocoo.metrics.sklearn_alts.global_accuracy_from_confusion(cfsn)`

`kwcocoo.metrics.sklearn_alts.class_accuracy_from_confusion(cfsn)`

`kwcocoo.metrics.sklearn_alts._binary_clf_curve2(y_true, y_score, pos_label=None, sample_weight=None)`

MODIFIED VERSION OF SCIKIT-LEARN API

Calculate true and false positives per binary classification threshold.

Parameters

- **y_true** (*array, shape = [n_samples]*) – True targets of binary classification
- **y_score** (*array, shape = [n_samples]*) – Estimated probabilities or decision function
- **pos_label** (*int or str, default=None*) – The label of the positive class
- **sample_weight** (*array-like of shape (n_samples,), default=None*) – Sample weights.

Returns

- **fps** (*array, shape = [n_thresholds]*) – A count of false positives, at index i being the number of negative samples assigned a score $\geq \text{thresholds}[i]$. The total number of negative samples is equal to $\text{fps}[-1]$ (thus true negatives are given by $\text{fps}[-1] - \text{fps}$).
- **tps** (*array, shape = [n_thresholds <= len(np.unique(y_score))]*) – An increasing count of true positives, at index i being the number of positive samples assigned a score $\geq \text{thresholds}[i]$. The total number of positive samples is equal to $\text{tps}[-1]$ (thus false negatives are given by $\text{tps}[-1] - \text{tps}$).
- **thresholds** (*array, shape = [n_thresholds]*) – Decreasing score values.

Example

```
>>> y_true = [      1,      1,      1,      1,      1,      1,      0]
>>> y_score = [ np.nan, 0.2, 0.3, 0.4, 0.5, 0.6, 0.3]
>>> sample_weight = None
>>> pos_label = None
>>> fps, tps, thresholds = _binary_clf_curve2(y_true, y_score)
```

2.1.1.5.1.9 kwcoco.metrics.util module

2.1.1.5.1.10 kwcoco.metrics.voc_metrics module

class kwcoco.metrics.voc_metrics.VOC_Metrics(*classes=None*)

Bases: NiceRepr

API to compute object detection scores using Pascal VOC evaluation method.

To use, add true and predicted detections for each image and then run the `VOC_Metrics.score()` function.

Variables

- **recs** (*Dict[int, List[dict]]*) – true boxes for each image. maps image ids to a list of records within that image. Each record is a tlbr bbox, a difficult flag, and a class name.
- **cx_to_lines** (*Dict[int, List]*) – VOC formatted prediction predictions. mapping from class index to all predictions for that category. Each “line” is a list of [*<imgid>*, *<score>*, *<tl_x>*, *<tl_y>*, *<br_x>*, *<br_y>*].
- **classes** (*None* / *List[str]* / `kwcoco.CategoryTree`) – class names

`add_truth(true_dets, gid)`


`add_predictions(pred_dets, gid)`

`score(iou_thresh=0.5, bias=1, method='voc2012')`

Compute VOC scores for every category

Example

```
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> from kwcoco.metrics.voc_metrics import * # NOQA
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=1, nboxes=(0, 100), n_fp=(0, 30), n_fn=(0, 30), classes=2, score_
>>>     _noise=0.9, newstyle=0)
>>> gid = ub.peek(dmet.gid_to_pred_dets)
>>> self = VOC_Metrics(classes=dmet.classes)
>>> self.add_truth(dmet.true_detections(gid), gid)
>>> self.add_predictions(dmet.pred_detections(gid), gid)
>>> voc_scores = self.score()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.figure(fnum=1, doclf=True)
>>> voc_scores['perclass'].draw(key='pr')
```

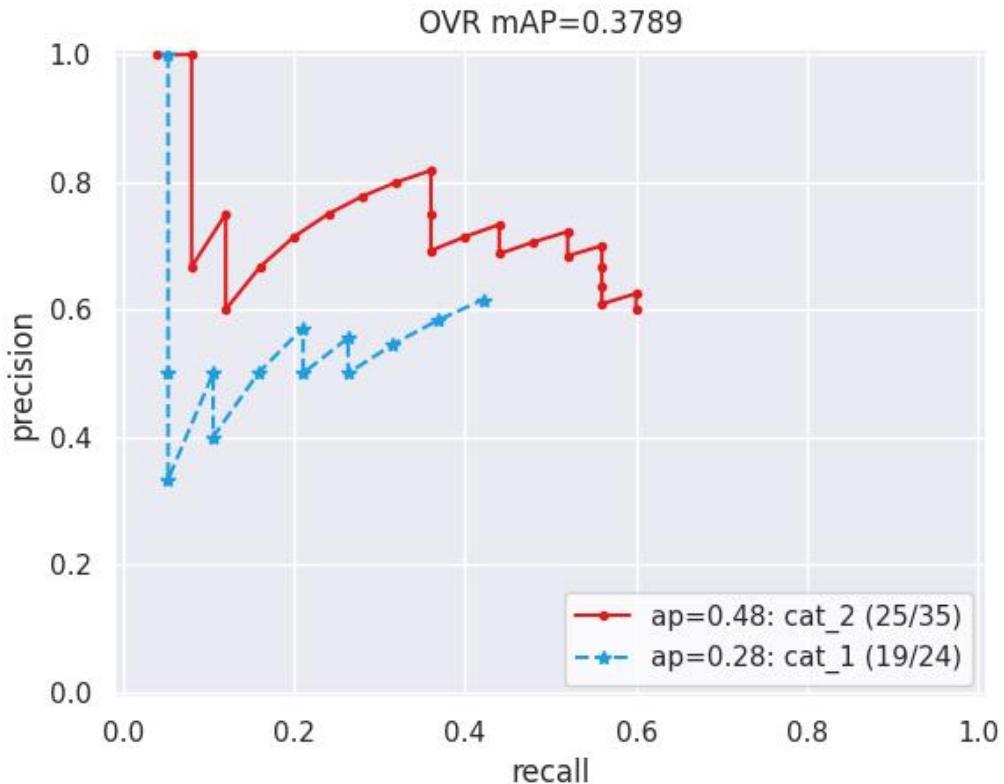

```
kwplot.figure(fnum=2)           dmet.true_detections(0).draw(color='green',           labels=None)
dmet.pred_detections(0).draw(color='blue',   labels=None)   kwplot.autopl() .gca().set_xlim(0,    100)
kwplot.autopl() .gca().set_ylim(0, 100)

kwcoco.metrics.voc_metrics._pr_curves(y, method='voc2012')
```

Compute a PR curve from a method

Parameters

`y (pd.DataFrame | DataFrameArray)` – output of detection_confusions

Returns

`Tuple[float, ndarray, ndarray]`

Example

```
>>> import pandas as pd
>>> y1 = pd.DataFrame.from_records([
>>>     {'pred': 0, 'score': 10.00, 'true': -1, 'weight': 1.00},
>>>     {'pred': 0, 'score': 1.65, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 8.64, 'true': -1, 'weight': 1.00},
>>>     {'pred': 0, 'score': 3.97, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 1.68, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 5.06, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 0.25, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 1.75, 'true': 0, 'weight': 1.00},
>>>     {'pred': 0, 'score': 8.52, 'true': 0, 'weight': 1.00},
```

(continues on next page)

(continued from previous page)

```
>>>     {'pred': 0, 'score': 5.20, 'true': 0, 'weight': 1.00},  
>>> ])  
>>> import kwarray  
>>> y2 = kwarray.DataFrameArray(y1)  
>>> _pr_curves(y2)  
>>> _pr_curves(y1)
```

`kwcoco.metrics.voc_metrics._voc_eval(lines, recs, classname, iou_thresh=0.5, method='voc2012', bias=1.0)`

VOC AP evaluation for a single category.

Parameters

- **lines** (*List[list]*) – VOC formatted predictions. Each “line” is a list of [[<imgid>, <score>, <tl_x>, <tl_y>, <br_x>, <br_y>]].
- **recs** (*Dict[int, List[dict]]*) – true boxes for each image. maps image ids to a list of records within that image. Each record is a tlbr bbox, a difficult flag, and a class name.
- **classname** (*str*) – the category to evaluate.
- **method** (*str*) – code for how the AP is computed.
- **bias** (*float*) – either 1.0 or 0.0.

Returns

info about the evaluation containing AP. Contains fp, tp, prec, rec,

Return type

Dict

Note: Raw replication of matlab implementation of creating assignments and the resulting PR-curves and AP. Based on MATLAB code [1].

References

[1] http://host.robots.ox.ac.uk/pascal/VOC/voc2012/VOCdevkit_18-May-2011.tar

`kwcoco.metrics.voc_metrics._voc_ave_precision(rec, prec, method='voc2012')`

Compute AP from precision and recall Based on MATLAB code in¹, ², and³.

Parameters

- **rec** (*ndarray*) – recall
- **prec** (*ndarray*) – precision
- **method** (*str*) – either voc2012 or voc2007

Returns

ap: average precision

Return type

float

¹ http://host.robots.ox.ac.uk/pascal/VOC/voc2012/VOCdevkit_18-May-2011.tar

² https://github.com/rbgirshick/voc-dpm/blob/master/test/pascal_eval.m

³ https://github.com/rbgirshick/voc-dpm/blob/c0b88564bd668bcc6216bbffe96cb061613be768/utils/bootstrap/VOCevaldet_bootstrap.m

References

2.1.1.5.2 Module contents

mkinit kwcocoo.metrics -w –relative

class kwcocoo.metrics.BinaryConfusionVectors(*data*, *cx=None*, *classes=None*)

Bases: NiceRepr

Stores information about a binary classification problem. This is always with respect to a specific class, which is given by *cx* and *classes*.

The *data* DataFrameArray must contain

is_true - if the row is an instance of class *classes[cx]* *pred_score* - the predicted probability of class *classes[cx]*, and *weight* - sample weight of the example

Example

```
>>> from kwcocoo.metrics.confusion_vectors import * # NOQA
>>> self = BinaryConfusionVectors.demo(n=10)
>>> print('self = {!r}'.format(self))
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

```
>>> self = BinaryConfusionVectors.demo(n=0)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

```
>>> self = BinaryConfusionVectors.demo(n=1)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

```
>>> self = BinaryConfusionVectors.demo(n=2)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
```

classmethod demo(*n=10*, *p_true=0.5*, *p_error=0.2*, *p_miss=0.0*, *rng=None*)

Create random data for tests

Parameters


- **n** (*int*) – number of rows
- **p_true** (*float*) – fraction of real positive cases
- **p_error** (*float*) – probability of making a recoverable mistake
- **p_miss** (*float*) – probability of making a unrecoverable mistake
- **rng** (*int* | *RandomState* | *None*) – random seed / state

Returns

BinaryConfusionVectors

Example

```
>>> from kwococo.metrics.confusion_vectors import * # NOQA
>>> cfsn = BinaryConfusionVectors.demo(n=1000, p_error=0.1, p_miss=0.1)
>>> measures = cfsn.measures()
>>> print('measures = {}'.format(ub.urepr(measures, nl=1)))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.figure(fnum=1, pnum=(1, 2, 1))
>>> measures.draw('pr')
>>> kwplot.figure(fnum=1, pnum=(1, 2, 2))
>>> measures.draw('roc')
```

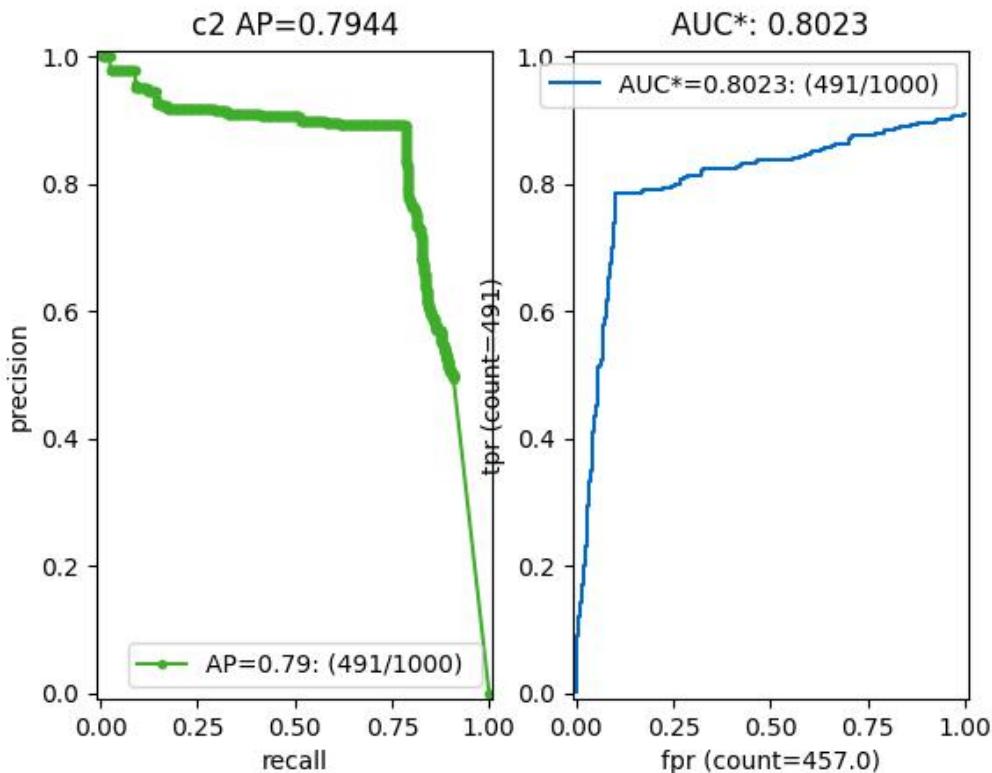

property catname

measures(*stabilize_thresh*=7, *fp_cutoff*=None, *monotonic_ppv*=True, *ap_method*='pycocotools')

Get statistics (F1, G1, MCC) versus thresholds

Parameters

- **stabilize_thresh** (*int*, *default*=7) – if fewer than this many data points inserts dummy stabilization data so curves can still be drawn.
- **fp_cutoff** (*int* | *None*) – maximum number of false positives in the truncated roc curves. The default of *None* is equivalent to `float('inf')`.
- **monotonic_ppv** (*bool*) – if *True* ensures that precision is always increasing as recall decreases. This is done in pycocotools scoring, but I'm not sure its a good idea.

Example

```
>>> from kwcocoo.metrics.confusion_vectors import * # NOQA
>>> self = BinaryConfusionVectors.demo(n=0)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
>>> self = BinaryConfusionVectors.demo(n=1, p_true=0.5, p_error=0.5)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
>>> self = BinaryConfusionVectors.demo(n=3, p_true=0.5, p_error=0.5)
>>> print('measures = {}'.format(ub.urepr(self.measures())))

>>> self = BinaryConfusionVectors.demo(n=100, p_true=0.5, p_error=0.5, p_miss=0.
    -> 3)
>>> print('measures = {}'.format(ub.urepr(self.measures())))
>>> print('measures = {}'.format(ub.urepr(ub.odict(self.measures()))))
```

References

https://en.wikipedia.org/wiki/Confusion_matrix https://en.wikipedia.org/wiki/Precision_and_recall https://en.wikipedia.org/wiki/Matthews_correlation_coefficient

_binary_clf_curves(stabilize_thresh=7, fp_cutoff=None)

Compute TP, FP, TN, and FN counts for this binary confusion vector.

Code common to ROC, PR, and threshold measures, computes the elements of the binary confusion matrix at all relevant operating point thresholds.

Parameters

- **stabilize_thresh** (*int*) – if fewer than this many data points insert stabilization data.
- **fp_cutoff** (*int | None*) – maximum number of false positives

Example

```
>>> from kwcocoo.metrics.confusion_vectors import * # NOQA
>>> self = BinaryConfusionVectors.demo(n=1, p_true=0.5, p_error=0.5)
>>> self._binary_clf_curves()

>>> self = BinaryConfusionVectors.demo(n=0, p_true=0.5, p_error=0.5)
>>> self._binary_clf_curves()

>>> self = BinaryConfusionVectors.demo(n=100, p_true=0.5, p_error=0.5)
>>> self._binary_clf_curves()
```

draw_distribution()

_3dplot()

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 1), n_fn=(0, 2), nimgs=256, nboxes=(0, 10),
>>>     bbox_noise=10,
>>>     classes=1)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> self = bin_cfsn = cfsn_vecs.binarize_classless()
>>> #dmet.summarize(plot=True)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.figure(fnum=3)
>>> self._3dplot()
```

class kwcoco.metrics.ConfusionVectors(*data*, *classes*, *probs=None*)

Bases: `NiceRepr`

Stores information used to construct a confusion matrix. This includes corresponding vectors of predicted labels, true labels, sample weights, etc...

Variables

- ***data*** (`kwarray.DataFrameArray`) – should at least have keys `true`, `pred`, `weight`
- ***classes*** (`Sequence` / `CategoryTree`) – list of category names or category graph
- ***probs*** (`ndarray` / `None`) – probabilities for each class

Example


```
>>> # xdoctest: IGNORE_WANT
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 10), n_fp=(0, 1), classes=3)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> print(cfsn_vecs.data._pandas())
   pred  true    score    weight      iou     txs     pxs     gid
0      2      2  10.0000  1.0000  1.0000      0      4      0
1      2      2   7.5025  1.0000  1.0000      1      3      0
2      1      1   5.0050  1.0000  1.0000      2      2      0
3      3     -1   2.5075  1.0000 -1.0000     -1      1      0
4      2     -1   0.0100  1.0000 -1.0000     -1      0      0
5     -1      2   0.0000  1.0000 -1.0000      3     -1      0
6     -1      2   0.0000  1.0000 -1.0000      4     -1      0
7      2      2  10.0000  1.0000  1.0000      0      5      1
8      2      2   8.0020  1.0000  1.0000      1      4      1
9      1      1   6.0040  1.0000  1.0000      2      3      1
...
62     -1      2   0.0000  1.0000 -1.0000      7     -1      7
```

(continues on next page)

(continued from previous page)

| | | | | | | | | |
|----|----|----|---------|--------|---------|----|----|---|
| 63 | -1 | 3 | 0.0000 | 1.0000 | -1.0000 | 8 | -1 | 7 |
| 64 | -1 | 1 | 0.0000 | 1.0000 | -1.0000 | 9 | -1 | 7 |
| 65 | 1 | -1 | 10.0000 | 1.0000 | -1.0000 | -1 | 0 | 8 |
| 66 | 1 | 1 | 0.0100 | 1.0000 | 1.0000 | 0 | 1 | 8 |
| 67 | 3 | -1 | 10.0000 | 1.0000 | -1.0000 | -1 | 3 | 9 |
| 68 | 2 | 2 | 6.6700 | 1.0000 | 1.0000 | 0 | 2 | 9 |
| 69 | 2 | 2 | 3.3400 | 1.0000 | 1.0000 | 1 | 1 | 9 |
| 70 | 3 | -1 | 0.0100 | 1.0000 | -1.0000 | -1 | 0 | 9 |
| 71 | -1 | 2 | 0.0000 | 1.0000 | -1.0000 | 2 | -1 | 9 |

```
>>> # xdoctest: +REQUIRES(--show)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> import kwplot
>>> kwplot.autompl()
>>> from kwcoco.metrics.confusion_vectors import ConfusionVectors
>>> cfsn_vecs = ConfusionVectors.demo(
...     nimgs=128, nboxes=(0, 10), n_fp=(0, 3), n_fn=(0, 3), classes=3)
>>> cx_to_binvecs = cfsn_vecs.binarize_ovr()
>>> measures = cx_to_binvecs.measures()['perclass']
>>> print('measures = {!r}'.format(measures))
measures = <PerClass_Measures({
    'cat_1': <Measures({'ap': 0.227, 'auc': 0.507, 'catname': cat_1, 'max_f1': f1=0.
...45@0.47, 'nsupport': 788.000})>,
    'cat_2': <Measures({'ap': 0.288, 'auc': 0.572, 'catname': cat_2, 'max_f1': f1=0.
...51@0.43, 'nsupport': 788.000})>,
    'cat_3': <Measures({'ap': 0.225, 'auc': 0.484, 'catname': cat_3, 'max_f1': f1=0.
...46@0.40, 'nsupport': 788.000})>,
}) at 0x7facf77bdfd0>
>>> kwplot.figure(fnum=1, doclf=True)
>>> measures.draw(key='pr', fnum=1, pnum=(1, 3, 1))
>>> measures.draw(key='roc', fnum=1, pnum=(1, 3, 2))
>>> measures.draw(key='mcc', fnum=1, pnum=(1, 3, 3))
...
...
```

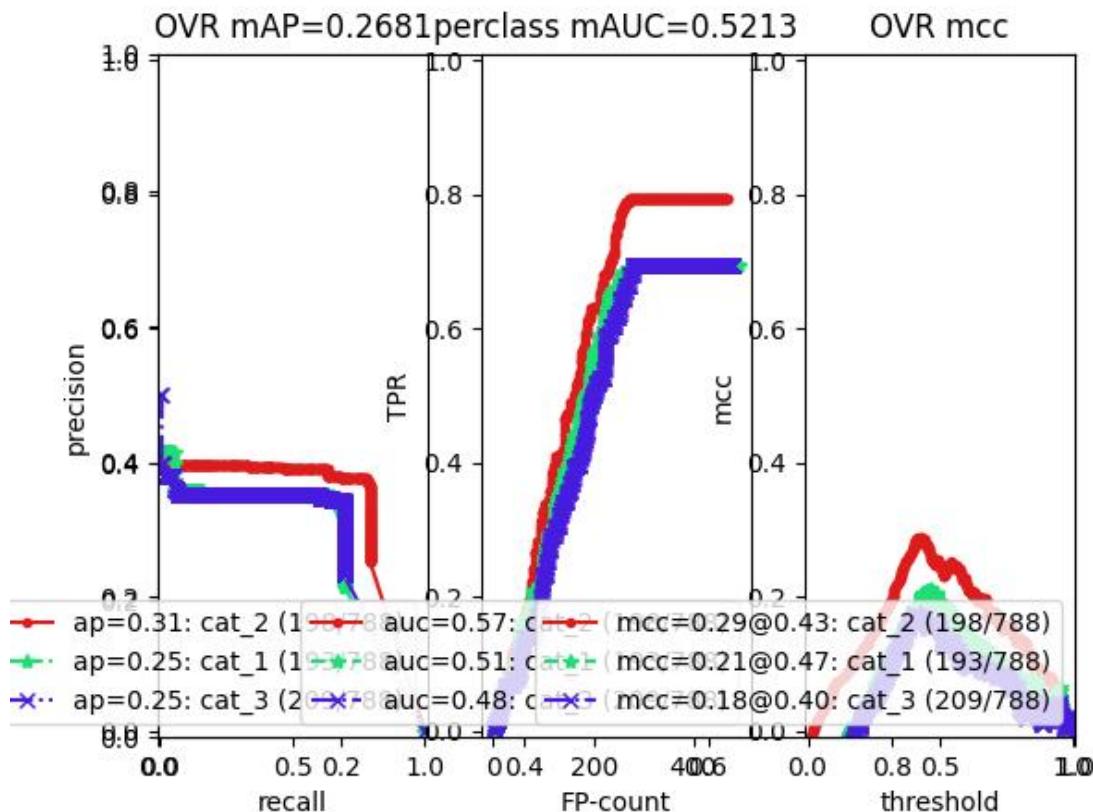

classmethod from_json(state)

classmethod demo(kw)**

Parameters

****kwargs** – See [kwCOCO.metrics.DetectionMetrics.demo\(\)](#)

Returns

ConfusionVectors

Example

```
>>> from kwCOCO.metrics.confusion_vectors import * # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> print('cfsn_vecs = {!r}'.format(cfsn_vecs))
>>> cx_to_binvecs = cfsn_vecs.binarize_ovr()
>>> print('cx_to_binvecs = {!r}'.format(cx_to_binvecs))
```

classmethod from_arrays(true, pred=None, score=None, weight=None, probs=None, classes=None)

Construct confusion vector data structure from component arrays

Example

```
>>> # xdoctest: +REQUIRES(module:pandas)
>>> import kwarray
>>> classes = ['person', 'vehicle', 'object']
>>> rng = kwarray.ensure_rng(0)
>>> true = (rng.rand(10) * len(classes)).astype(int)
>>> probs = rng.rand(len(true), len(classes))
>>> cfsn_vecs = ConfusionVectors.from_arrays(true=true, probs=probs, u
   ~classes=classes)
>>> cfsn_vecs.confusion_matrix()
pred      person    vehicle    object
real
person        0        0        0
vehicle       2        4        1
object        2        1        0
```

`confusion_matrix(compress=False)`

Builds a confusion matrix from the confusion vectors.

Parameters

`compress (bool, default=False)` – if True removes rows / columns with no entries

Returns

`cm`

[the labeled confusion matrix]

(Note: we should write a efficient replacement for
this use case. #remove_pandas)

Return type

`pd.DataFrame`

CommandLine

```
xdoctest -m kwcoco.metrics.confusion_vectors ConfusionVectors.confusion_matrix
```

Example

```
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 10), n_fp=(0, 1), n_fn=(0, 1),
>>>     classes=3, cls_noise=.2, newstyle=False)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> cm = cfsn_vecs.confusion_matrix()
...
>>> print(cm.to_string(float_format=lambda x: '%.2f' % x))
pred      background    cat_1    cat_2    cat_3
real
background        0.00    1.00    2.00    3.00
cat_1            3.00   12.00    0.00    0.00
```

(continues on next page)

(continued from previous page)

| | | | | |
|-------|------|------|-------|-------|
| cat_2 | 3.00 | 0.00 | 14.00 | 0.00 |
| cat_3 | 2.00 | 0.00 | 0.00 | 17.00 |

coarsen(cx)

Creates a coarsened set of vectors

Returns

ConfusionVectors

binarize_classless(negative_classes=None)

Creates a binary representation useful for measuring the performance of detectors. It is assumed that scores of “positive” classes should be high and “negative” classes should be low.

Parameters

- **negative_classes** (*List[str | int] | None*) – list of negative class names or idxs, by default chooses any class with a true class index of -1. These classes should ideally have low scores.

Returns

BinaryConfusionVectors

Note: The “classlessness” of this depends on the compat=”all” argument being used when constructing confusion vectors, otherwise it becomes something like a macro-average because the class information was used in deciding which true and predicted boxes were allowed to match.

Example

```
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo()
>>> nimgs=10, nboxes=(0, 10), n_fp=(0, 1), n_fn=(0, 1), classes=3
>>> cfsn_vecs = dmet.confusion_vectors()
>>> class_idxs = list(dmet.classes.node_to_idx.values())
>>> binvecs = cfsn_vecs.binarize_classless()
```

binarize_ovr(mode=1, keyby='name', ignore_classes={'ignore'}, approx=False)

Transforms cfsn_vecs into one-vs-rest BinaryConfusionVectors for each category.

Parameters

- **mode** (*int, default=1*) – 0 for heirarchy aware or 1 for voc like. MODE 0 IS PROBABLY BROKEN
- **keyby** (*int | str*) – can be cx or name
- **ignore_classes** (*Set[str]*) – category names to ignore
- **approx** (*bool, default=False*) – if True try and approximate missing scores otherwise assume they are irrecoverable and use -inf

Returns**which behaves like**

Dict[int, BinaryConfusionVectors]: cx_to_binvecs

Return type*OneVsRestConfusionVectors*

Example

```
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> print('cfsn_vecs = {!r}'.format(cfsn_vecs))
>>> catname_to_binvecs = cfsn_vecs.binarize_ovr(keyby='name')
>>> print('catname_to_binvecs = {!r}'.format(catname_to_binvecs))
```

cfsn_vecs.data.pandas() catname_to_binvecs.cx_to_binvecs['class_1'].data.pandas()

Note:

`classification_report(verbose=0)`

Build a classification report with various metrics.

Example

```
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> report = cfsn_vecs.classification_report(verbose=1)
```

`class kwcoco.metrics.DetectionMetrics(classes=None)`

Bases: `NiceRepr`

Object that computes associations between detections and can convert them into sklearn-compatible representations for scoring.

Variables

- `gid_to_true_dets` (`Dict[int, kwimage.Detections]`) – maps image ids to truth
- `gid_to_pred_dets` (`Dict[int, kwimage.Detections]`) – maps image ids to predictions
- `classes` (`kwcoco.CategoryTree / None`) – the categories to be scored, if unspecified attempts to determine these from the truth detections

Example

```
>>> # Demo how to use detection metrics directly given detections only
>>> # (no kwcoco file required)
>>> from kwcoco.metrics import detect_metrics
>>> import kwimage
>>> # Setup random true detections (these are just boxes and scores)
>>> true_dets = kwimage.Detections.random(3)
>>> # Peek at the simple internals of a detections object
>>> print('true_dets.data = {}'.format(ub.urepr(true_dets.data, nl=1)))
>>> # Create similar but different predictions
>>> true_subset = true_dets.take([1, 2]).warp(kwimage.Affine.coerce({'scale': 1.1}))
>>> false_positive = kwimage.Detections.random(3)
>>> pred_dets = kwimage.Detections.concatenate([true_subset, false_positive])
```

(continues on next page)

(continued from previous page)

```
>>> dmet = DetectionMetrics()
>>> dmet.add_predictions(pred_dets, imgname='image1')
>>> dmet.add_truth(true_dets, imgname='image1')
>>> # Raw confusion vectors
>>> cfsn_vecs = dmet.confusion_vectors()
>>> print(cfsn_vecs.data.pandas().to_string())
>>> # Our scoring definition (derived from confusion vectors)
>>> print(dmet.score_kwococo())
>>> # VOC scoring
>>> print(dmet.score_voc(bias=0))
>>> # Original pycocotools scoring
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> print(dmet.score_pycocotools())
```

Example

```
>>> dmet = DetectionMetrics.demo(
...     nimgs=100, nboxes=(0, 3), n_fp=(0, 1), classes=8, score_noise=0.9,
...     hacked=False)
>>> print(dmet.score_kwococo(bias=0, compat='mutex', prioritize='iou')['mAP'])
...
>>> # NOTE: IN GENERAL NETHARN AND VOC ARE NOT THE SAME
>>> print(dmet.score_voc(bias=0) ['mAP'])
0.8582...
>>> #print(dmet.score_coco() ['mAP'])
```

`clear()`

`enrich_confusion_vectors(cfsn_vecs)`

Adds annotation id information into confusion vectors computed via this detection metrics object.

TODO: should likely use this at the end of the function that builds the confusion vectors.

`classmethod from_coco(true_coco, pred_coco, gids=None, verbose=0)`

Create detection metrics from two coco files representing the truth and predictions.

Parameters

- `true_coco` (`kwcoco.CocoDataset`) – coco dataset with ground truth
- `pred_coco` (`kwcoco.CocoDataset`) – coco dataset with predictions

Example

```
>>> import kwcoco
>>> from kwcoco.demo.perterb import perterb_coco
>>> true_coco = kwcoco.CocoDataset.demo('shapes')
>>> perterbkw = dict(box_noise=0.5, cls_noise=0.5, score_noise=0.5)
>>> pred_coco = perterb_coco(true_coco, **perterbkw)
>>> self = DetectionMetrics.from_coco(true_coco, pred_coco)
>>> self.score_voc()
```

`_register_imagename(imgname, gid=None)`

`add_predictions(pred_dets, imgname=None, gid=None)`

Register/Add predicted detections for an image

Parameters

- `pred_dets` (`kwimage.Detections`) – predicted detections
- `imgname` (`str | None`) – a unique string to identify the image
- `gid` (`int | None`) – the integer image id if known

`add_truth(true_dets, imgname=None, gid=None)`

Register/Add groundtruth detections for an image

Parameters

- `true_dets` (`kwimage.Detections`) – groundtruth
- `imgname` (`str | None`) – a unique string to identify the image
- `gid` (`int | None`) – the integer image id if known

`true_detections(gid)`

gets Detections representation for groundtruth in an image

`pred_detections(gid)`

gets Detections representation for predictions in an image

property classes

`confusion_vectors(iou_thresh=0.5, bias=0, gids=None, compat='mutex', prioritize='iou', ignore_classes='ignore', background_class=NoParam, verbose='auto', workers=0, track_probs='try', max_dets=None)`

Assigns predicted boxes to the true boxes so we can transform the detection problem into a classification problem for scoring.

Parameters

- `iou_thresh` (`float | List[float]`) – bounding box overlap iou threshold required for assignment if a list, then return type is a dict. Defaults to 0.5
- `bias` (`float`) – for computing bounding box overlap, either 1 or 0 Defaults to 0.
- `gids` (`List[int] | None`) – which subset of images ids to compute confusion metrics on. If not specified all images are used. Defaults to None.
- `compat` (`str`) – can be ('ancestors' | 'mutex' | 'all'). determines which pred boxes are allowed to match which true boxes. If 'mutex', then pred boxes can only match true boxes of the same class. If 'ancestors', then pred boxes can match true boxes that match or have a coarser label. If 'all', then any pred can match any true, regardless of its category label. Defaults to all.
- `prioritize` (`str`) – can be ('iou' | 'class' | 'correct') determines which box to assign to if multiple true boxes overlap a predicted box. If prioritize is iou, then the true box with maximum iou (above iou_thresh) will be chosen. If prioritize is class, then it will prefer matching a compatible class above a higher iou. If prioritize is correct, then ancestors of the true class are preferred over descendants of the true class, over unrelated classes. Default to 'iou'
- `ignore_classes` (`set | str`) – class names indicating ignore regions. Default={ 'ignore' }

- **background_class** (*str | NoParamType*) – Name of the background class. If unspecified we try to determine it with heuristics. A value of None means there is no background class.
- **verbose** (*int | str*) – verbosity flag. Default to ‘auto’. In auto mode, verbose=1 if len(gids) > 1000.
- **workers** (*int*) – number of parallel assignment processes. Defaults to 0
- **track_probs** (*str*) – can be ‘try’, ‘force’, or False. if truthy, we assume probabilities for multiple classes are available. default=’try’

Returns

ConfusionVectors | Dict[float, ConfusionVectors]

Example

```
>>> dmet = DetectionMetrics.demo(nimgs=30, classes=3,
>>>                               nboxes=10, n_fp=3, box_noise=10,
>>>                               with_probs=False)
>>> iou_to_cfsn = dmet.confusion_vectors(iou_thresh=[0.3, 0.5, 0.9])
>>> for t, cfsn in iou_to_cfsn.items():
>>>     print('t = {!r}'.format(t))
>>>     print(cfsn.binarize_ovr().measures())
>>>     print(cfsn.binarize_classless().measures())
```

score_kwant(*iou_thresh=0.5*)

Scores the detections using kwant

score_kwCOCO(*iou_thresh=0.5, bias=0, gids=None, compat='all', prioritize='iou'*)

our scoring method

score_voc(*iou_thresh=0.5, bias=1, method='voc2012', gids=None, ignore_classes='ignore'*)

score using voc method

Example

```
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=100, nboxes=(0, 3), n_fp=(0, 1), classes=8,
>>>     score_noise=.5)
>>> print(dmet.score_voc()['mAP'])
0.9399...
```

_to_coco()

Convert to a coco representation of truth and predictions

with inverse aid mappings

score_pycocotools(*with_evaler=False, with_confusion=False, verbose=0, iou_thresholds=None*)

score using ms-coco method

Returns

dictionary with pct info

Return type

Dict

Example

```
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> from kwcoco.metrics.detect_metrics import *
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 3), n_fn=(0, 1), n_fp=(0, 1), classes=8, with_
>>>     _probs=False)
>>> pct_info = dmet.score_pycocotools(verbose=1,
>>>                                     with_evaler=True,
>>>                                     with_confusion=True,
>>>                                     iou_thresholds=[0.5, 0.9])
>>> evaler = pct_info['evaler']
>>> iou_to_cfsn_vecs = pct_info['iou_to_cfsn_vecs']
>>> for iou_thresh in iou_to_cfsn_vecs.keys():
>>>     print('iou_thresh = {!r}'.format(iou_thresh))
>>>     cfsn_vecs = iou_to_cfsn_vecs[iou_thresh]
>>>     ovr_measures = cfsn_vecs.binarize_ovr().measures()
>>>     print('ovr_measures = {}'.format(ub.urepr(ovr_measures, nl=1,_
>>>     precision=4)))
```

Note: by default pycocotools computes average precision as the literal average of computed precisions at 101 uniformly spaced recall thresholds.

pycocoutils seems to only allow predictions with the same category as the truth to match those truth objects. This should be the same as calling dmet.confusion_vectors with compat = mutex

pycocoutils does not take into account the fact that each box often has a score for each category.

pycocoutils will be incorrect if any annotation has an id of 0

a major difference in the way kwcoco scores versus pycocoutils is the calculation of AP. The assignment between truth and predicted detections produces similar enough results. Given our confusion vectors we use the scikit-learn definition of AP, whereas pycocoutils seems to compute precision and recall — more or less correctly — but then it resamples the precision at various specified recall thresholds (in the *accumulate* function, specifically how *pr* is resampled into the *q* array). This can lead to a large difference in reported scores.

pycocoutils also smooths out the precision such that it is monotonic decreasing, which might not be the best idea.

pycocotools area ranges are inclusive on both ends, that means the “small” and “medium” truth selections do overlap somewhat.

score_coco(*with_evaler=False*, *with_confusion=False*, *verbose=0*, *iou_thresholds=None*)

score using ms-coco method

Returns

dictionary with pct info

Return type

Dict

Example

```
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> from kwcoco.metrics.detect_metrics import *
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 3), n_fn=(0, 1), n_fp=(0, 1), classes=8, with_
>>>     _probs=False)
>>> pct_info = dmet.score_pycocotools(verbose=1,
>>>                                     with_evaler=True,
>>>                                     with_confusion=True,
>>>                                     iou_thresholds=[0.5, 0.9])
>>> evaler = pct_info['evaler']
>>> iou_to_cfsn_vecs = pct_info['iou_to_cfsn_vecs']
>>> for iou_thresh in iou_to_cfsn_vecs.keys():
>>>     print('iou_thresh = {!r}'.format(iou_thresh))
>>>     cfsn_vecs = iou_to_cfsn_vecs[iou_thresh]
>>>     ovr_measures = cfsn_vecs.binarize_ovr().measures()
>>>     print('ovr_measures = {}'.format(ub.urepr(ovr_measures, nl=1,_
>>>     precision=4)))
```

Note: by default pycocotools computes average precision as the literal average of computed precisions at 101 uniformly spaced recall thresholds.

pycocoutils seems to only allow predictions with the same category as the truth to match those truth objects. This should be the same as calling dmet.confusion_vectors with compat = mutex

pycocoutils does not take into account the fact that each box often has a score for each category.

pycocoutils will be incorrect if any annotation has an id of 0

a major difference in the way kwcoco scores versus pycocoutils is the calculation of AP. The assignment between truth and predicted detections produces similar enough results. Given our confusion vectors we use the scikit-learn definition of AP, whereas pycocoutils seems to compute precision and recall — more or less correctly — but then it resamples the precision at various specified recall thresholds (in the *accumulate* function, specifically how *pr* is resampled into the *q* array). This can lead to a large difference in reported scores.

pycocoutils also smooths out the precision such that it is monotonic decreasing, which might not be the best idea.

pycocotools area ranges are inclusive on both ends, that means the “small” and “medium” truth selections do overlap somewhat.

classmethod demo(**kwargs)

Creates random true boxes and predicted boxes that have some noisy offset from the truth.

Kwargs:

classes (int):

class list or the number of foreground classes. Defaults to 1.

nimgs (int): number of images in the coco datasets. Defaults to 1.

nboxes (int): boxes per image. Defaults to 1.

n_fp (int): number of false positives. Defaults to 0.

n_fn (int):
number of false negatives. Defaults to 0.

box_noise (float):
std of a normal distribution used to perterb both box location and box size. Defaults to 0.

cls_noise (float):
probability that a class label will change. Must be within 0 and 1. Defaults to 0.

anchors (ndarray):
used to create random boxes. Defaults to None.

null_pred (bool):
if True, predicted classes are returned as null, which means only localization scoring is suitable.
Defaults to 0.

with_probs (bool):
if True, includes per-class probabilities with predictions Defaults to 1.

`rng (int | None | RandomState): random seed / state`

CommandLine


```
xdoctest -m kwcoco.metrics.detect_metrics DetectionMetrics.demo:2 --show
```

Example

```
>>> kwargs = {}
>>> # Seed the RNG
>>> kwargs['rng'] = 0
>>> # Size parameters determine how big the data is
>>> kwargs['nimgs'] = 5
>>> kwargs['nboxes'] = 7
>>> kwargs['classes'] = 11
>>> # Noise parameters perterb predictions further from the truth
>>> kwargs['n_fp'] = 3
>>> kwargs['box_noise'] = 0.1
>>> kwargs['cls_noise'] = 0.5
>>> dmet = DetectionMetrics.demo(**kwargs)
>>> print('dmet.classes = {}'.format(dmet.classes))
dmet.classes = <CategoryTree(nNodes=12, maxDepth=3, maxBreadth=4...)>
>>> # Can grab kwimage.Detection object for any image
>>> print(dmet.true_detections(gid=0))
<Detections(4)>
>>> print(dmet.pred_detections(gid=0))
<Detections(7)>
```

Example

```
>>> # Test case with null predicted categories
>>> dmet = DetectionMetrics.demo(nimgs=30, null_pred=1, classes=3,
>>>                               nboxes=10, n_fp=3, box_noise=0.1,
>>>                               with_probs=False)
>>> dmet.gid_to_pred_dets[0].data
>>> dmet.gid_to_true_dets[0].data
>>> cfsn_vecs = dmet.confusion_vectors()
>>> binvecs_ovr = cfsn_vecs.binarize_ovr()
>>> binvecs_per = cfsn_vecs.binarize_classless()
>>> measures_per = binvecs_per.measures()
>>> measures_ovr = binvecs_ovr.measures()
>>> print('measures_per = {!r}'.format(measures_per))
>>> print('measures_ovr = {!r}'.format(measures_ovr))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> measures_ovr['perclass'].draw(key='pr', fnum=2)
```

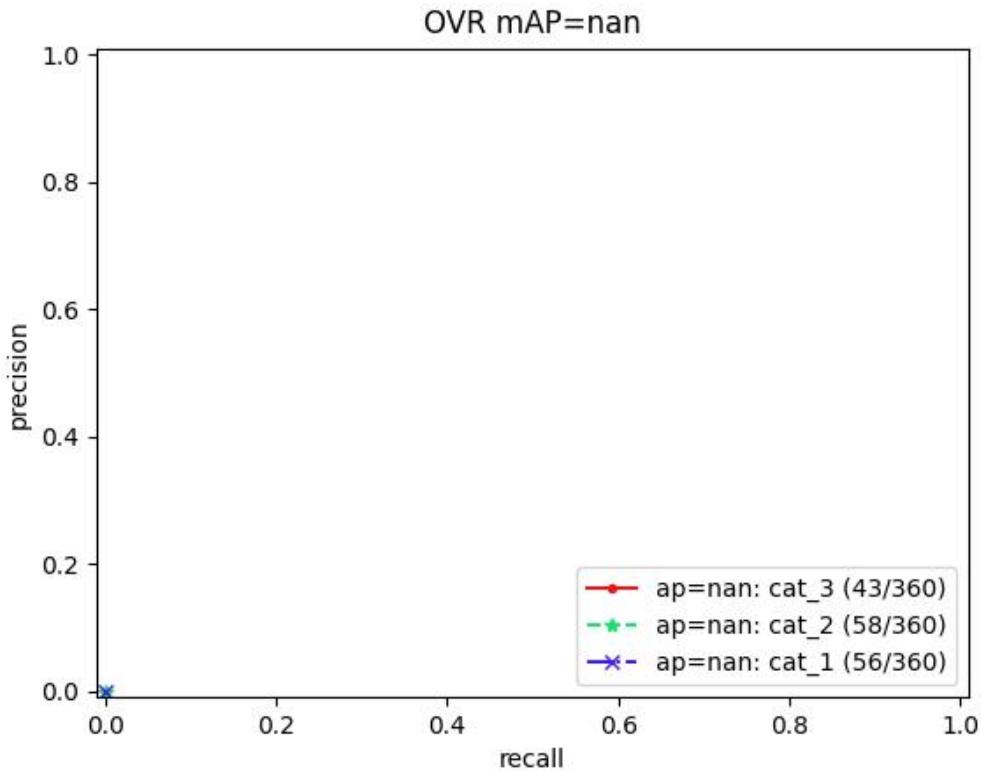

Example

```
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 1), n_fn=(0, 1), nimgs=32, nboxes=(0, 16),
>>>     classes=3, rng=0, newstyle=1, box_noise=0.5, cls_noise=0.0, score_
>>> _noise=0.3, with_probs=False)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> summary = dmet.summarize(plot=True, title='DetectionMetrics summary demo',_
>>> with_ovr=True, with_bin=False)
>>> summary['bin_measures']
>>> kwplot.show_if_requested()
```

`summarize(out_dpath=None, plot=False, title='', with_bin='auto', with_ovr='auto')`


Create summary one-versus-rest and binary metrics.

Parameters

- `out_dpath` (`pathlib.Path | None`) – FIXME: not hooked up
- `with_ovr` (`str | bool`) – include one-versus-rest metrics (wrt the classes). If ‘auto’ enables if possible. FIXME: auto is not working.
- `with_bin` (`str | bool`) – include binary classless metrics (i.e. detected or not). If ‘auto’ enables if possible. FIXME: auto is not working.
- `plot` (`bool`) – if true, also write plots. Defaults to False.
- `title` (`str`) – passed if plot is given

Example

```
>>> from kwcoco.metrics.confusion_vectors import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 128), n_fn=(0, 4), nimgs=512, nboxes=(0, 32),
>>>     classes=3, rng=0)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> dmet.summarize(plot=True, title='DetectionMetrics summary demo')
>>> kwplot.show_if_requested()
```

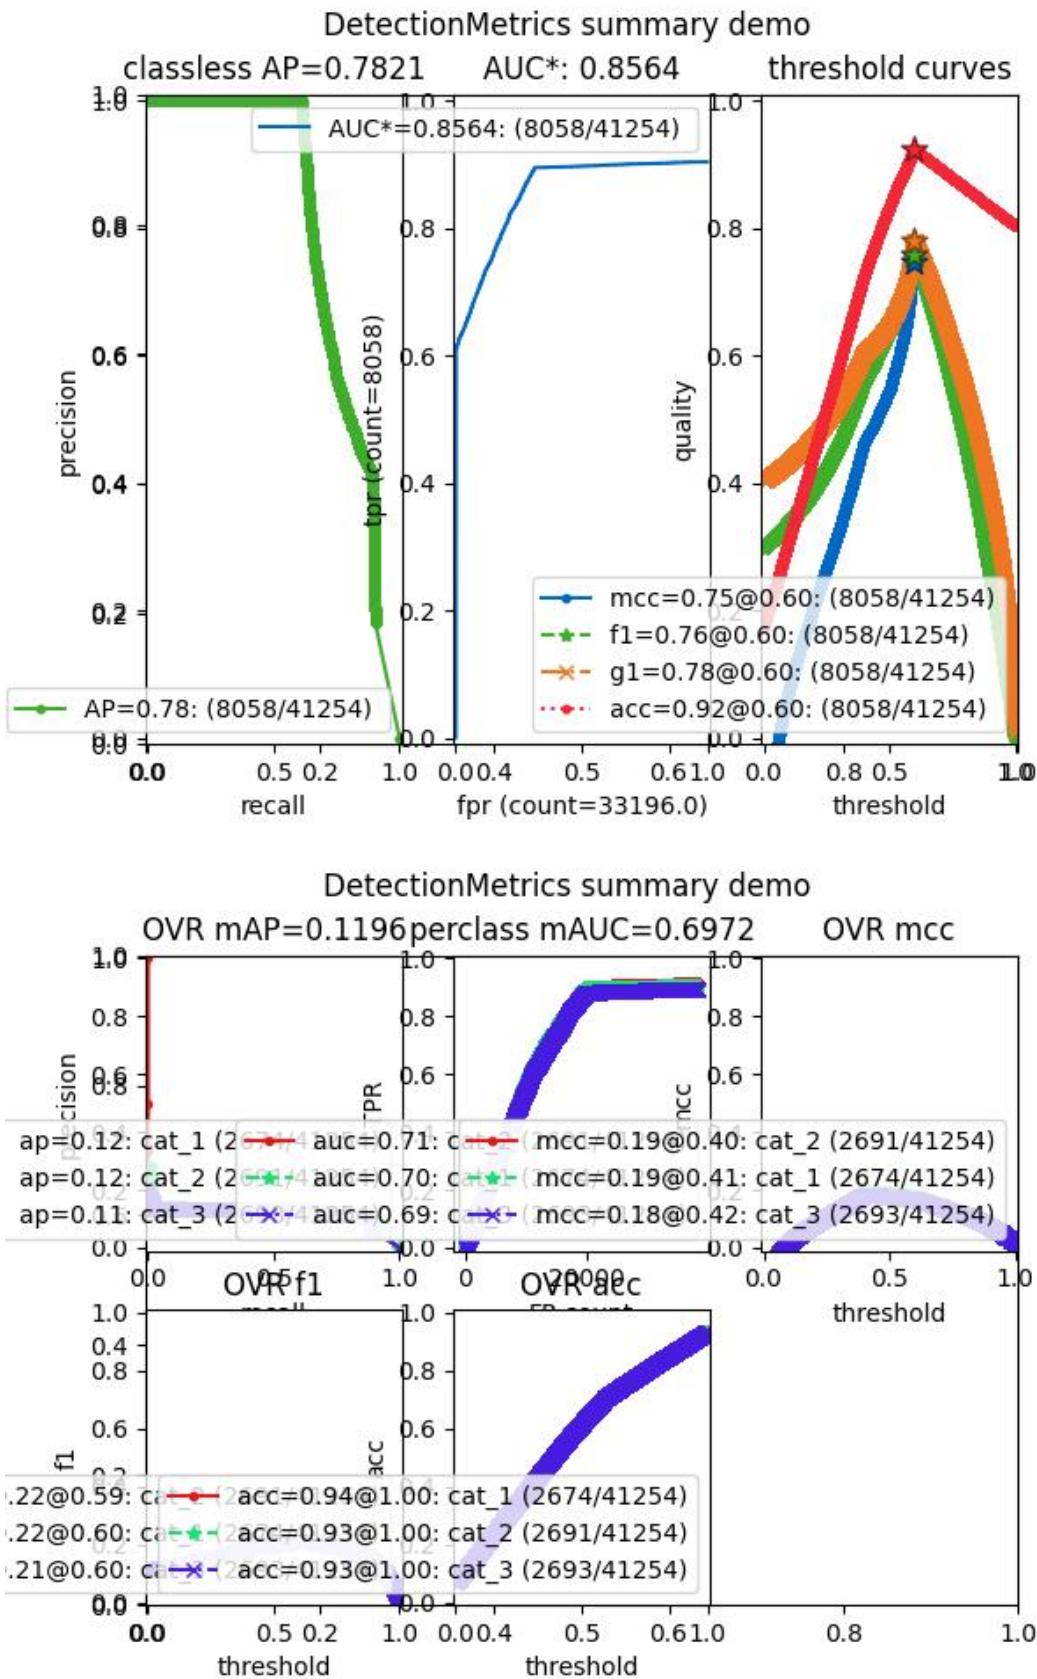


```
class kwcoco.metrics.Measures(info)
```

Bases: NiceRepr, DictProxy

Holds accumulated confusion counts, and derived measures

Example

```
>>> from kwcoco.metrics.confusion_vectors import BinaryConfusionVectors # NOQA
>>> binvecs = BinaryConfusionVectors.demo(n=100, p_error=0.5)
>>> self = binvecs.measures()
>>> print('self = {!r}'.format(self))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> self.draw(doclf=True)
>>> self.draw(key='pr', pnum=(1, 2, 1))
>>> self.draw(key='roc', pnum=(1, 2, 2))
>>> kwplot.show_if_requested()
```

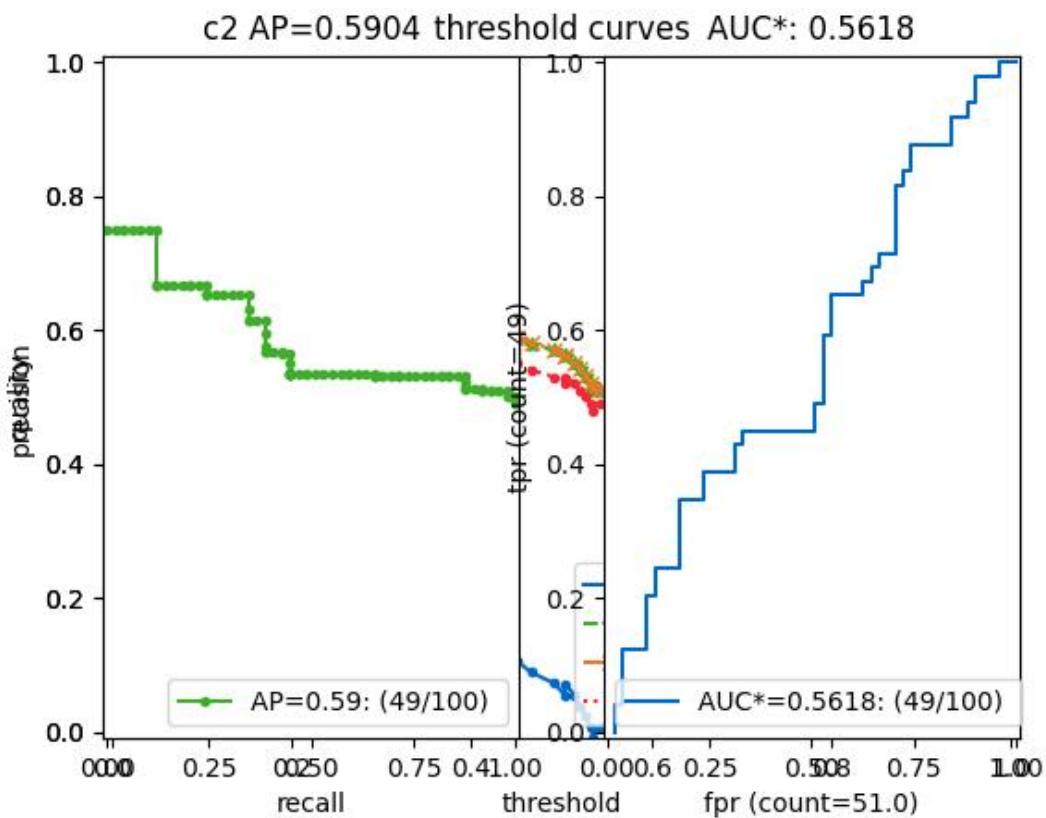

```
property catname
reconstruct()
classmethod from_json(state)
```

`summary()``maximized_thresholds()`

Returns thresholds that maximize metrics.

`counts()``draw(key=None, prefix='', **kw)`


Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.metrics.confusion_vectors import ConfusionVectors # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> ovr_cfsn = cfsn_vecs.binarize_ovr(keyby='name')
>>> self = ovr_cfsn.measures()['perclass']
>>> self.draw('mcc', doclf=True, fnum=1)
>>> self.draw('pr', doclf=1, fnum=2)
>>> self.draw('roc', doclf=1, fnum=3)
```

`summary_plot(fnum=1, title='', subplots='auto')`

Example

```
>>> from kwcoco.metrics.confusion_measures import * # NOQA
>>> from kwcoco.metrics.confusion_vectors import ConfusionVectors # NOQA
>>> cfsn_vecs = ConfusionVectors.demo(n=3, p_error=0.5)
>>> binvecs = cfsn_vecs.binarize_classless()
>>> self = binvecs.measures()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> self.summary_plot()
>>> kwplot.show_if_requested()
```

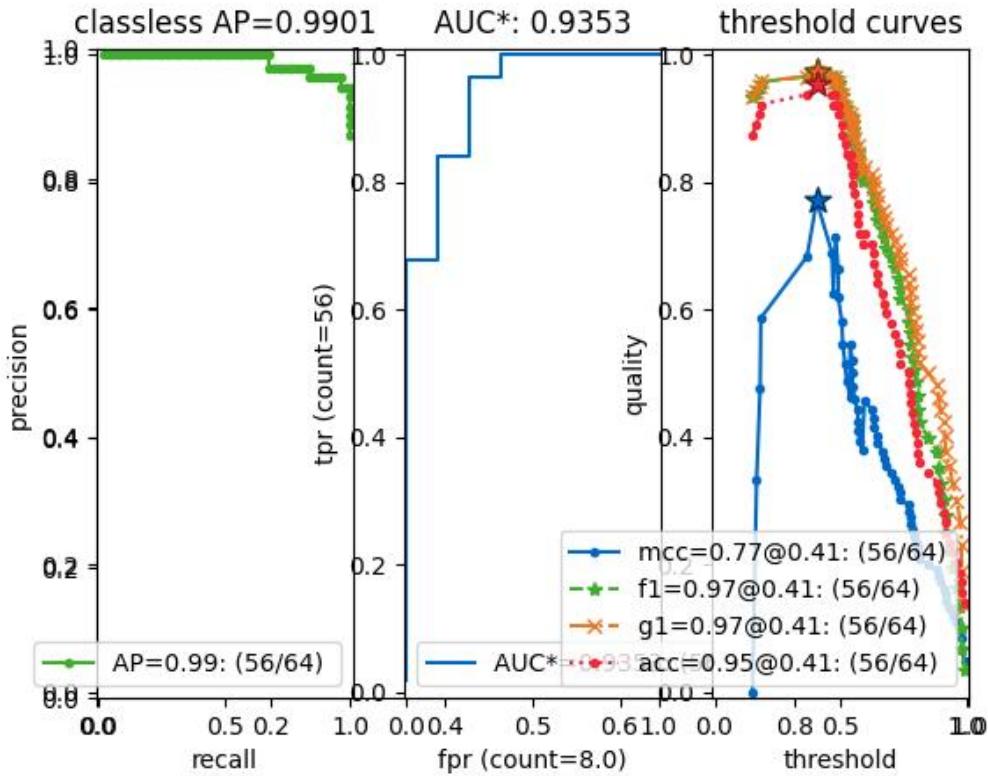**classmethod demo(**kwargs)**

Create a demo Measures object for testing / demos

Parameters

****kwargs** – passed to `BinaryConfusionVectors.demo()`. some valid keys are: n, rng, p_rue, p_error, p_miss.

classmethod combine(tocombine, precision=None, growth=None, thresh_bins=None)

Combine binary confusion metrics

Parameters


- **tocombine** (`List[Measures]`) – a list of measures to combine into one
- **precision** (`int | None`) – If specified rounds thresholds to this precision which can prevent a RAM explosion when combining a large number of measures. However, this is a lossy operation and will impact the underlying scores. NOTE: use `growth` instead.
- **growth** (`int | None`) – if specified this limits how much the resulting measures are allowed to grow by. If `None`, growth is unlimited. Otherwise, if `growth` is ‘`max`’, the growth is limited to the maximum length of an input. We might make this more numerical in the future.
- **thresh_bins** (`int | None`) – Force this many threshold bins.

Returns

`kwcoco.metrics.confusion_measures.Measures`

Example

```
>>> from kwcoc.metrics.confusion_measures import * # NOQA
>>> measures1 = Measures.demo(n=15)
>>> measures2 = measures1
>>> tocombine = [measures1, measures2]
>>> new_measures = Measures.combine(tocombine)
>>> new_measures.reconstruct()
>>> print('new_measures = {!r}'.format(new_measures))
>>> print('measures1 = {!r}'.format(measures1))
>>> print('measures2 = {!r}'.format(measures2))
>>> print(ub.urepr(measures1.__json__(), nl=1, sort=0))
>>> print(ub.urepr(measures2.__json__(), nl=1, sort=0))
>>> print(ub.urepr(new_measures.__json__(), nl=1, sort=0))
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.figure(fnum=1)
>>> new_measures.summary_plot()
>>> measures1.summary_plot()
>>> measures1.draw('roc')
>>> measures2.draw('roc')
>>> new_measures.draw('roc')
```

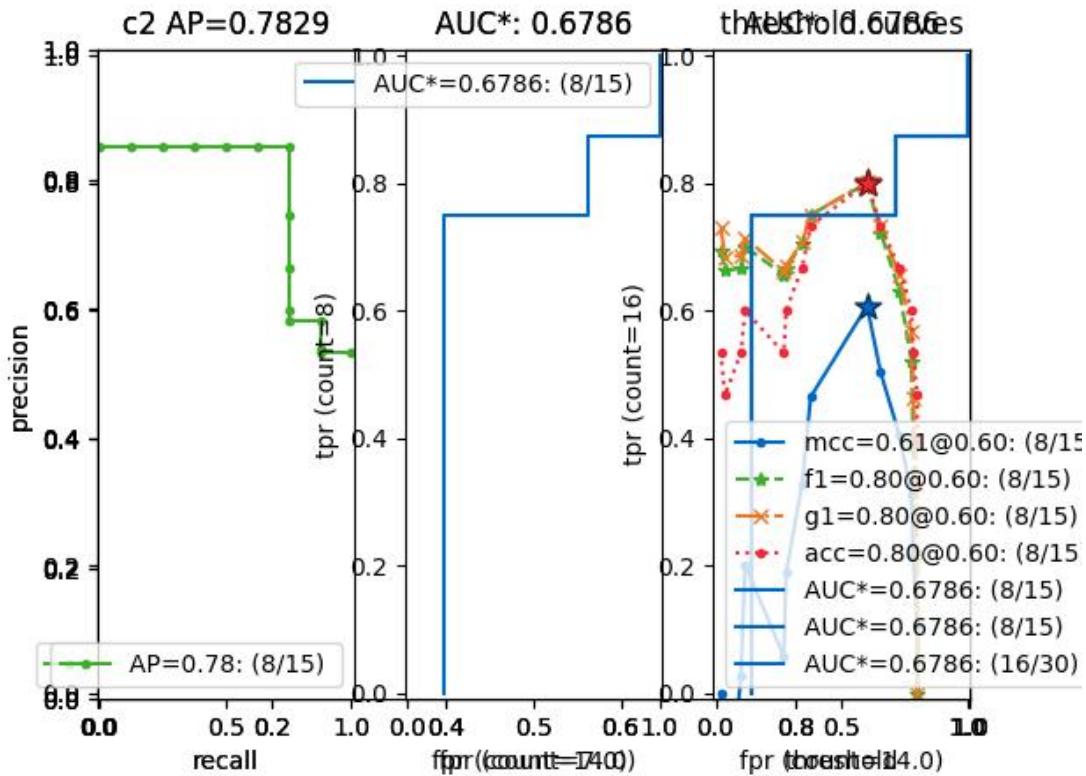

Example

```
>>> # Demonstrate issues that can arrise from choosing a precision
>>> # that is too low when combining metrics. Breakpoints
>>> # between different metrics can get muddled, but choosing a
>>> # precision that is too high can overwhelm memory.
>>> from kwcocoo.metrics.confusion_measures import * # NOQA
>>> base = ub.map_vals(np.asarray, {
>>>     'tp_count': [1, 1, 2, 2, 2, 3],
>>>     'fp_count': [0, 1, 1, 2, 3, 4, 5],
>>>     'fn_count': [1, 1, 0, 0, 0, 0],
>>>     'tn_count': [5, 4, 4, 3, 2, 1, 0],
>>>     'thresholds': [.0, .0, .0, .0, .0, .0, .0],
>>> })
>>> # Make tiny offsets to thresholds
>>> rng = kwarray.ensure_rng(0)
>>> n = len(base['thresholds'])
>>> offsets = [
>>>     sorted(rng.rand(n) * 10 ** -rng.randint(4, 7))[::-1]
>>>     for _ in range(20)
>>> ]
>>> tocombine = []
>>> for offset in offsets:
>>>     base_n = base.copy()
>>>     base_n['thresholds'] += offset
>>>     measures_n = Measures(base_n).reconstruct()
>>>     tocombine.append(measures_n)
>>> for precision in [6, 5, 2]:
>>>     combo = Measures.combine(tocombine, precision=precision).reconstruct()
>>>     print('precision = {!r}'.format(precision))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> for growth in [None, 'max', 'log', 'root', 'half']:
>>>     combo = Measures.combine(tocombine, growth=growth).reconstruct()
>>>     print('growth = {!r}'.format(growth))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> #print(combo.counts().pandas()
```

Example

```
>>> # Test case: combining a single measures should leave it unchanged
>>> from kwcocoo.metrics.confusion_measures import * # NOQA
>>> measures = Measures.demo(n=40, p_true=0.2, p_error=0.4, p_miss=0.6)
>>> df1 = measures.counts().pandas().fillna(0)
>>> print(df1)
>>> tocombine = [measures]
>>> combo = Measures.combine(tocombine)
>>> df2 = combo.counts().pandas().fillna(0)
>>> print(df2)
>>> assert np.allclose(df1, df2)
```

```
>>> combo = Measures.combine(tocombine, thresh_bins=2)
>>> df3 = combo.counts().pandas().fillna(0)
>>> print(df3)
```

```
>>> # I am NOT sure if this is correct or not
>>> thresh_bins = 20
>>> combo = Measures.combine(tocombine, thresh_bins=thresh_bins)
>>> df4 = combo.counts().pandas().fillna(0)
>>> print(df4)
```

```
>>> combo = Measures.combine(tocombine, thresh_bins=np.linspace(0, 1, 20))
>>> df4 = combo.counts().pandas().fillna(0)
>>> print(df4)
```

```
assert np.allclose(combo['thresholds'], measures['thresholds']) assert np.allclose(combo['fp_count'], measures['fp_count']) assert np.allclose(combo['tp_count'], measures['tp_count']) assert np.allclose(combo['tp_count'], measures['tp_count'])

globals().update(xdev.get_func_kwargs(Measures.combine))
```

Example

```
>>> # Test degenerate case
>>> from kwococo.metrics.confusion_measures import * # NOQA
>>> tocombine = [
>>>     {'fn_count': [0.0], 'fp_count': [359980.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7747.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [360849.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [424.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [367003.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [991.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [367976.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [1017.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676338.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7067.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676348.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7406.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676626.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [7858.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [676693.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [10969.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677269.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11188.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677331.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11734.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677395.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11556.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677418.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11621.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677422.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11424.0]}, 
>>>     {'fn_count': [0.0], 'fp_count': [677648.0], 'thresholds': [0.0], 'tn_
->count': [0.0], 'tp_count': [11424.0]}]
```

(continues on next page)

(continued from previous page)

```

↳ count': [0.0], 'tp_count': [9804.0}],
>>>   {'fn_count': [0.0], 'fp_count': [677826.0], 'thresholds': [0.0], 'tn_
↳ count': [0.0], 'tp_count': [2470.0]},
>>>   {'fn_count': [0.0], 'fp_count': [677834.0], 'thresholds': [0.0], 'tn_
↳ count': [0.0], 'tp_count': [2470.0]},
>>>   {'fn_count': [0.0], 'fp_count': [677835.0], 'thresholds': [0.0], 'tn_
↳ count': [0.0], 'tp_count': [2470.0]},
>>>   {'fn_count': [11123.0, 0.0], 'fp_count': [0.0, 676754.0], 'thresholds': [
↳ [0.0002442002442002442, 0.0], 'tn_count': [676754.0, 0.0], 'tp_count': [2.0,
↳ 11125.0]},
>>>   {'fn_count': [7738.0, 0.0], 'fp_count': [0.0, 676466.0], 'thresholds': [
↳ [0.0002442002442002442, 0.0], 'tn_count': [676466.0, 0.0], 'tp_count': [0.0,
↳ 7738.0]},
>>>   {'fn_count': [8653.0, 0.0], 'fp_count': [0.0, 676341.0], 'thresholds': [
↳ [0.0002442002442002442, 0.0], 'tn_count': [676341.0, 0.0], 'tp_count': [0.0,
↳ 8653.0]},
>>> ]
>>> thresh_bins = np.linspace(0, 1, 4)
>>> combo = Measures.combine(tocombine, thresh_bins=thresh_bins).reconstruct()
>>> print('tocombine = {}'.format(ub.urepr(tocombine, nl=2)))
>>> print('thresh_bins = {!r}'.format(thresh_bins))
>>> print(ub.urepr(combo.__json__(), nl=1))
>>> for thresh_bins in [4096, 1]:
>>>     combo = Measures.combine(tocombine, thresh_bins=thresh_bins).
>>>     reconstruct()
>>>     print('thresh_bins = {!r}'.format(thresh_bins))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> for precision in [6, 5, 2]:
>>>     combo = Measures.combine(tocombine, precision=precision).reconstruct()
>>>     print('precision = {!r}'.format(precision))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))
>>> for growth in [None, 'max', 'log', 'root', 'half']:
>>>     combo = Measures.combine(tocombine, growth=growth).reconstruct()
>>>     print('growth = {!r}'.format(growth))
>>>     print('combo = {}'.format(ub.urepr(combo, nl=1)))
>>>     print('num_thresholds = {}'.format(len(combo['thresholds'])))

```

```
class kwcocoo.metrics.OneVsRestConfusionVectors(cx_to_binvecs, classes)
```

Bases: `NiceRepr`

Container for multiple one-vs-rest binary confusion vectors

Variables

- `cx_to_binvecs` –
- `classes` –

Example

```
>>> from kwcoco.metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     nimgs=10, nboxes=(0, 10), n_fp=(0, 1), classes=3)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> self = cfsn_vecs.binarize_ovr(keyby='name')
>>> print('self = {!r}'.format(self))
```

classmethod demo()

Parameters

****kwargs** – See `kwcoco.metrics.DetectionMetrics.demo()`

Returns

ConfusionVectors

keys()

measures(*stabilize_thresh*=7, *fp_cutoff*=None, *monotonic_ppv*=True, *ap_method*='pycocotools')

Creates binary confusion measures for every one-versus-rest category.

Parameters

- **stabilize_thresh** (*int*) – if fewer than this many data points inserts dummy stabilization data so curves can still be drawn. Default to 7.
- **fp_cutoff** (*int | None*) – maximum number of false positives in the truncated roc curves. The default None is equivalent to `float('inf')`
- **monotonic_ppv** (*bool*) – if True ensures that precision is always increasing as recall decreases. This is done in pycocotools scoring, but I'm not sure its a good idea. Default to True.

SeeAlso:

`BinaryConfusionVectors.measures()`

Example

```
>>> self = OneVsRestConfusionVectors.demo()
>>> thresh_result = self.measures()['perclass']
```

ovr_classification_report()

class kwcoco.metrics.PerClass_Measures(cx_to_info)

Bases: `NiceRepr`, `DictProxy`

summary()

classmethod from_json(state)

draw(key='mcc', prefix='', **kw)

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> from kwcoco.metrics.confusion_vectors import ConfusionVectors # NOQA
>>> cfsn_vecs = ConfusionVectors.demo()
>>> ovr_cfsn = cfsn_vecs.binarize_ovr(keyby='name')
>>> self = ovr_cfsn.measures()['perclass']
>>> self.draw('mcc', doclf=True, fnum=1)
>>> self.draw('pr', doclf=1, fnum=2)
>>> self.draw('roc', doclf=1, fnum=3)
```

`draw_roc(prefix='', **kw)`

`draw_pr(prefix='', **kw)`


`summary_plot(fnum=1, title='', subplots='auto')`

CommandLine

```
python ~/code/kwcoco/kwcoco/metrics/confusion_measures.py PerClass_Measures.
->summary_plot --show
```

Example

```
>>> from kwcoco.metrics.confusion_measures import * # NOQA
>>> from kwcoco.metrics.detect_metrics import DetectionMetrics
>>> dmet = DetectionMetrics.demo(
>>>     n_fp=(0, 1), n_fn=(0, 3), nimgs=32, nboxes=(0, 32),
>>>     classes=3, rng=0, newstyle=1, box_noise=0.7, cls_noise=0.2, score_
>>> noise=0.3, with_probs=False)
>>> cfsn_vecs = dmet.confusion_vectors()
>>> ovr_cfsn = cfsn_vecs.binarize_ovr(keyby='name', ignore_classes=['vector',
>>> '-raster'])
>>> self = ovr_cfsn.measures()['perclass']
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> import seaborn as sns
>>> sns.set()
>>> self.summary_plot(title='demo summary_plot ovr', subplots=['pr', 'roc'])
>>> kwplot.show_if_requested()
>>> self.summary_plot(title='demo summary_plot ovr', subplots=['mcc', 'acc'],
>>> fnum=2)
```

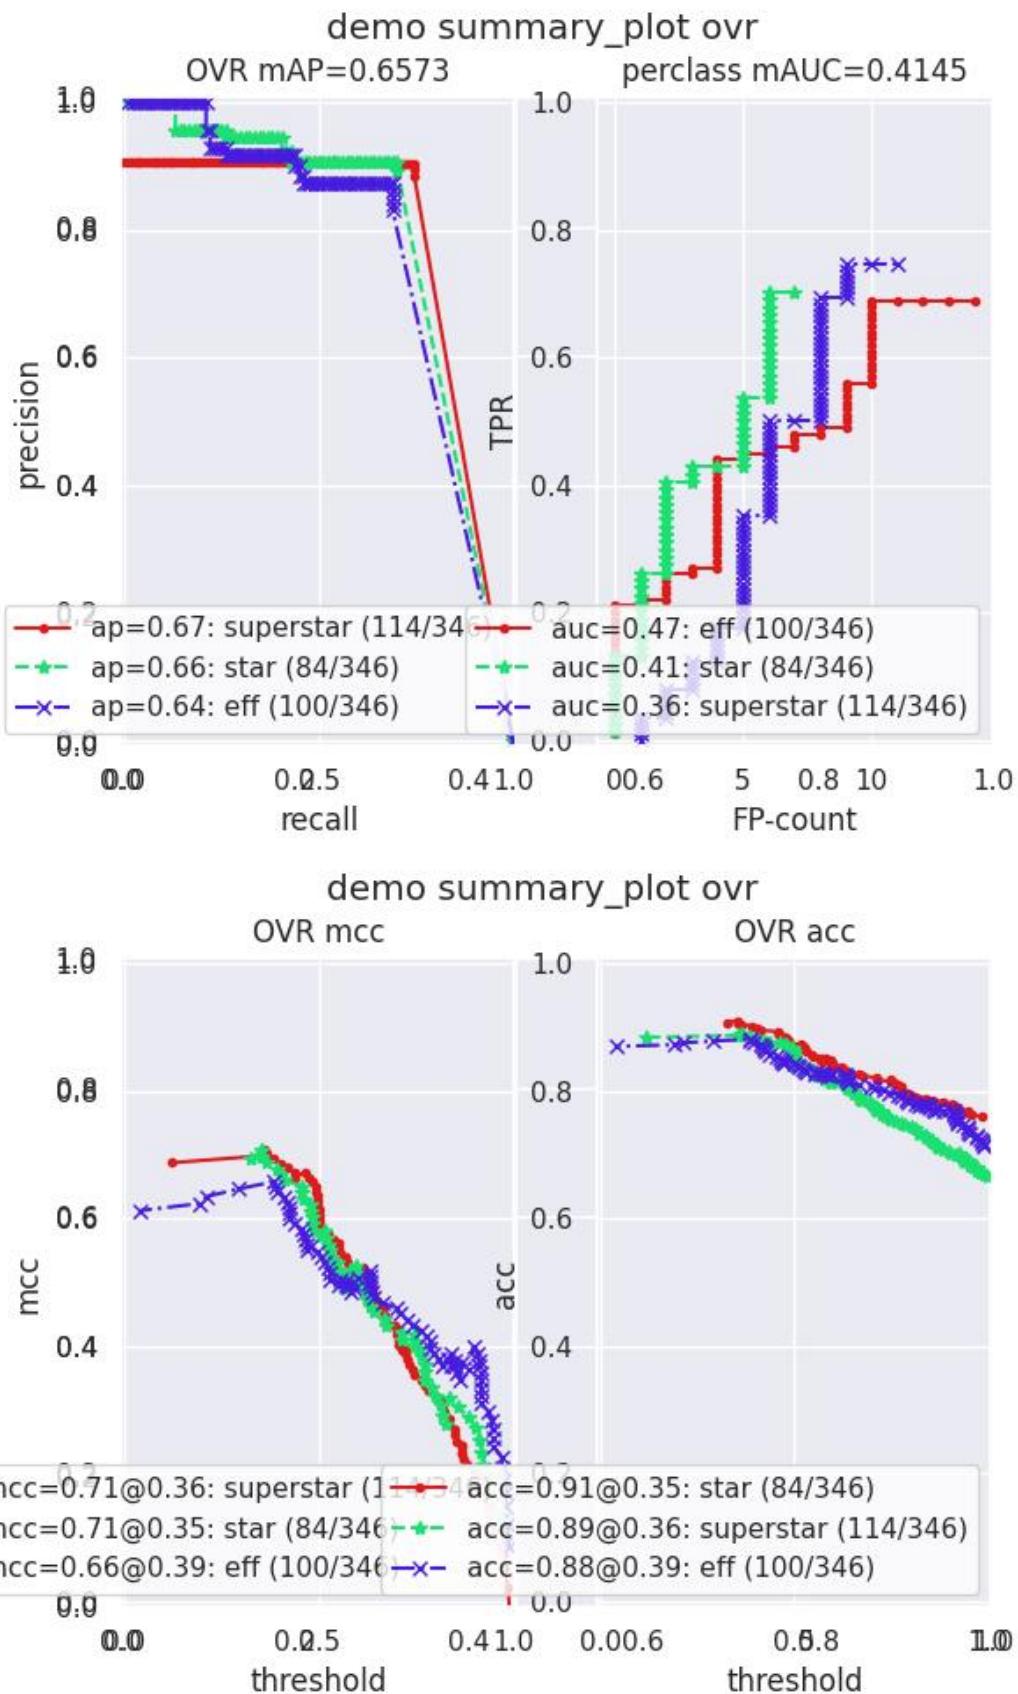

`kwCOCO.metrics.eval_detections_cli(**kw)`

DEPRECATED USE `kwCOCO eval` instead

CommandLine

```
xdoctest -m ~/code/kwCOCO/kwCOCO/metrics/detect_metrics.py eval_detections_cli
```

2.1.1.6 kwCOCO.util package

2.1.1.6.1 Subpackages

2.1.1.6.1.1 kwCOCO.util.delayed_ops package

2.1.1.6.1.2 Module contents

Functionality has been ported to delayed_image

`class kwCOCO.util.delayed_ops.DelayedArray(subdata=None)`

Bases: `DelayedUnaryOperation`

A generic NDArray.

Parameters

- `subdata (DelayedArray)`

property shape

Returns: `None | Tuple[int | None, ...]`

`class kwCOCO.util.delayed_ops.DelayedAsXarray(subdata=None, dsize=None, channels=None)`

Bases: `DelayedImage`

Casts the data to an xarray object in the finalize step

Example;

```
>>> # xdoctest: +REQUIRES(module:xarray)
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> # without channels
>>> base = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> self = base.as_xarray()
>>> final = self._validate().finalize()
>>> assert len(final.coords) == 0
>>> assert final.dims == ('y', 'x', 'c')
>>> # with channels
>>> base = DelayedLoad.demo(dsize=(16, 16), channels='r|g|b').prepare()
>>> self = base.as_xarray()
>>> final = self._validate().finalize()
>>> assert final.coords.indexes['c'].tolist() == ['r', 'g', 'b']
>>> assert final.dims == ('y', 'x', 'c')
```

Parameters

- `subdata (DelayedArray)`

- **dsizes** (*None* | *Tuple[int | None, int | None]*) – overrides subdata dsizes
- **channels** (*None* | *int* | *FusedChannelSpec*) – overrides subdata channels

`_finalize()`

Returns

ArrayLike

`optimize()`

Returns

DelayedImage

class kwcoco.util.delayed_ops.DelayedChannelConcat(*parts*, *dsizes=None*)

Bases: *ImageOpsMixin*, *DelayedConcat*

Stacks multiple arrays together.

Example

```
>>> from delayed_image import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> dsizes = (307, 311)
>>> c1 = DelayedNans(dsizes=dsizes, channels='foo')
>>> c2 = DelayedLoad.demo('astro', dsizes=dsizes, channels='R|G|B').prepare()
>>> cat = DelayedChannelConcat([c1, c2])
>>> warped_cat = cat.warp({'scale': 1.07}, dsizes=(328, 332))
>>> warped_cat._validate()
>>> warped_cat.finalize()
```

Example

```
>>> # Test case that failed in initial implementation
>>> # Due to incorrectly pushing channel selection under the concat
>>> from delayed_image import * # NOQA
>>> import kwimage
>>> fpath = kwimage.grab_test_image_fpath()
>>> base1 = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> base2 = DelayedLoad(fpath, channels='x|y|z').prepare().scale(2)
>>> base3 = DelayedLoad(fpath, channels='i|j|k').prepare().scale(2)
>>> bands = [base2, base1[:, :, 0].scale(2).evaluate(),
>>>           base1[:, :, 1].evaluate().scale(2),
>>>           base1[:, :, 2].evaluate().scale(2), base3]
>>> delayed = DelayedChannelConcat(bands)
>>> delayed = delayed.warp({'scale': 2})
>>> delayed = delayed[0:100, 0:55, [0, 2, 4]]
>>> delayed.write_network_text()
>>> delayed.optimize()
```

Parameters

- **parts** (*List[DelayedArray]*) – data to concat

- **dsizes** (*Tuple[int, int] | None*) – size if known a-priori

property channels

Returns: *None | FusedChannelSpec*

property shape

Returns: *Tuple[int | None, int | None, int | None]*

_finalize()**Returns**

ArrayLike

optimize()**Returns**

DelayedImage

take_channels(channels)

This method returns a subset of the vision data with only the specified bands / channels.

Parameters

channels (*List[int] | slice | channel_spec.FusedChannelSpec*) – List of integers indexes, a slice, or a channel spec, which is typically a pipe (|) delimited list of channel codes. See *ChannelSpec* for more details.

Returns

a delayed vision operation that only operates on the following channels.

Return type

DelayedArray

Example

```
>>> # xdoctest: +REQUIRES(module:kwcoco)
>>> from delayed_image.delayed_nodes import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = delayed = dset.coco_image(1).delay()
>>> channels = 'B11|B8|B1|B10'
>>> new = self.take_channels(channels)
```

Example

```
>>> # xdoctest: +REQUIRES(module:kwcoco)
>>> # Complex case
>>> import kwcoco
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> delayed = dset.coco_image(1).delay()
>>> astro = DelayedLoad.demo('astro', channels='r|g|b').prepare()
>>> aligned = astro.warp(kwimage.Affine.scale(600 / 512), dsizes='auto')
>>> self = combo = DelayedChannelConcat(delayed.parts + [aligned])
```

(continues on next page)

(continued from previous page)

```
>>> channels = 'B1|r|B8|g'
>>> new = self.take_channels(channels)
>>> new_cropped = new.crop((slice(10, 200), slice(12, 350)))
>>> new_opt = new_cropped.optimize()
>>> datas = new_opt.finalize()
>>> if 1:
>>>     new_cropped.write_network_text(with_labels='name')
>>>     new_opt.write_network_text(with_labels='name')
>>> vizable = kwimage.normalize_intensity(datas, axis=2)
>>> self._validate()
>>> new._validate()
>>> new_cropped._validate()
>>> new_opt._validate()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> stacked = kwimage.stack_images(vizable.transpose(2, 0, 1))
>>> kwplot.imshow(stacked)
```



Example

```
>>> # xdoctest: +REQUIRES(module:kwcoco)
>>> # Test case where requested channel does not exist
>>> import kwcoco
>>> from delayed_image.delayed_nodes import * # NOQA
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral', use_cache=1, verbose=100)
>>> self = delayed = dset.coco_image(1).delay()
>>> channels = 'B1|foobar|bazbiz|B8'
>>> new = self.take_channels(channels)
>>> new_cropped = new.crop((slice(10, 200), slice(12, 350)))
>>> fused = new_cropped.finalize()
>>> assert fused.shape == (190, 338, 4)
>>> assert np.all(np.isnan(fused[..., 1:3]))
>>> assert not np.any(np.isnan(fused[..., 0]))
>>> assert not np.any(np.isnan(fused[..., 3]))
```

`property num_overviews`

Returns: int

`as_xarray()`

Returns

DelayedAsXarray

`_push_operation_under(op, kwargs)`

`_validate()`

Check that the delayed metadata corresponds with the finalized data

`undo_warps(remove=None, retain=None, squash_nans=False, return_warps=False)`

Attempts to “undo” warping for each concatenated channel and returns a list of delayed operations that are cropped to the right regions.

Typically you will retrain offset, theta, and shear to remove scale. This ensures the data is spatially aligned up to a scale factor.

Parameters

- **remove** (*List[str]*) – if specified, list components of the warping to remove. Can include: “offset”, “scale”, “shearx”, “theta”. Typically set this to [“scale”].
- **retain** (*List[str]*) – if specified, list components of the warping to retain. Can include: “offset”, “scale”, “shearx”, “theta”. Mutually exclusive with “remove”. If neither remove or retain is specified, retain is set to [].
- **squash_nans** (*bool*) – if True, pure nan channels are squashed into a 1x1 array as they do not correspond to a real source.
- **return_warps** (*bool*) – if True, return the transforms we applied. I.e. the transform from the `self` to the returned parts. This is useful when you need to warp objects in the original space into the jagged space.

Returns

The `List[DelayedImage]` are the `parts` i.e. the new images with the warping undone. The `List[kwimage.Affine]`: is the transforms from `self` to each item in `parts`

Return type

List[DelayedImage] | Tuple[List[DelayedImage] | List[kwimage.Affine]]


Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> from delayed_image.delayed_leafs import DelayedNans
>>> import ubelt as ub
>>> import kwimage
>>> import kwarray
>>> import numpy as np
>>> # Demo case where we have different channels at different resolutions
>>> base = DelayedLoad.demo(channels='r|g|b').prepare().dequantize({'quant_max':
->': 255})
>>> bandR = base[:, :, 0].scale(100 / 512)[:, :-50].evaluate()
>>> bandG = base[:, :, 1].scale(300 / 512).warp({'theta': np.pi / 8, 'about': (150, 150)}).evaluate()
>>> bandB = base[:, :, 2].scale(600 / 512)[:150, :].evaluate()
>>> bandN = DelayedNans((600, 600), channels='N')
>>> # Make a concatenation of images of different underlying native resolutions
>>> delayed_vidspace = DelayedChannelConcat([
>>>     bandR.scale(6, dsize=(600, 600)).optimize(),
>>>     bandG.warp({'theta': -np.pi / 8, 'about': (150, 150)}).scale(2, dsize=(600, 600)).optimize(),
>>>     bandB.scale(1, dsize=(600, 600)).optimize(),
>>>     bandN,
>>> ]).warp({'scale': 0.7}).optimize()
>>> vidspace_box = kwimage.Boxes([[100, 10, 270, 160]], 'ltrb')
>>> vidspace_poly = vidspace_box.to_polygons()[0]
>>> vidspace_slice = vidspace_box.to_slices()[0]
>>> self = delayed_vidspace[vidspace_slice].optimize()
>>> print('--- Aligned --- ')
>>> self.write_network_text()
>>> squash_nans = True
>>> undone_all_parts, tfs1 = self.undo_warps(squash_nans=squash_nans, return_warps=True)
>>> undone_scale_parts, tfs2 = self.undo_warps(remove=['scale'], squash_nans=squash_nans, return_warps=True)
>>> stackable_aligned = self.finalize().transpose(2, 0, 1)
>>> stackable undone_all = []
>>> stackable undone_scale = []
>>> print('--- Undone All --- ')
>>> for undone in undone_all_parts:
...     undone.write_network_text()
...     stackable undone_all.append(undone.finalize())
>>> print('--- Undone Scale --- ')
>>> for undone in undone_scale_parts:
...     undone.write_network_text()
...     stackable undone_scale.append(undone.finalize())
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
```

(continues on next page)

(continued from previous page)

```
>>> kwplot.autompl()
>>> canvas0 = kwimage.stack_images(stackable_aligned, axis=1)
>>> canvas1 = kwimage.stack_images(stackable undone_all, axis=1)
>>> canvas2 = kwimage.stack_images(stackable undone_scale, axis=1)
>>> canvas0 = kwimage.draw_header_text(canvas0, 'Rescaled Aligned Channels')
>>> canvas1 = kwimage.draw_header_text(canvas1, 'Unwarped Channels')
>>> canvas2 = kwimage.draw_header_text(canvas2, 'Unscaled Channels')
>>> canvas = kwimage.stack_images([canvas0, canvas1, canvas2], axis=0)
>>> canvas = kwimage.fill_nans_with_checkers(canvas)
>>> kwplot.imshow(canvas)
```

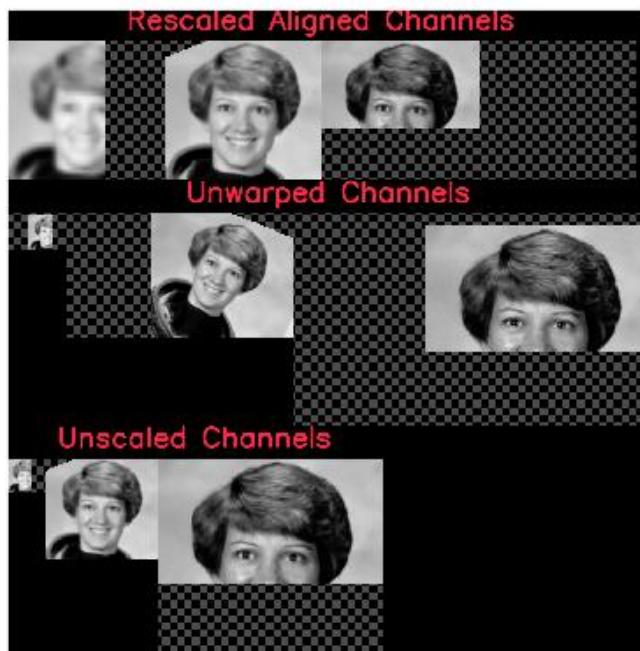

class kwcoco.util.delayed_ops.DelayedConcat(*parts, axis*)

Bases: *DelayedNaryOperation*

Stacks multiple arrays together.

Parameters

- **parts** (*List[DelayedArray]*) – data to concat
- **axis** (*int*) – axes to concat on

property shape

Returns: *None | Tuple[int | None, ...]*

class kwcoco.util.delayed_ops.DelayedCrop(*subdata, space_slice=None, chan_idxs=None*)

Bases: *DelayedImage*

Crops an image along integer pixel coordinates.

Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> base = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> # Test Fuse Crops Space Only
>>> crop1 = base[4:12, 0:16]
>>> self = crop1[2:6, 0:8]
>>> opt = self._opt_fuse_crops()
>>> self.write_network_text()
>>> opt.write_network_text()
>>> #
>>> # Test Channel Select Via Index
>>> self = base[:, :, [0]]
>>> self.write_network_text()
>>> final = self._finalize()
>>> assert final.shape == (16, 16, 1)
>>> assert base[:, :, [0, 1]].finalize().shape == (16, 16, 2)
>>> assert base[:, :, [2, 0, 1]].finalize().shape == (16, 16, 3)
```

Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> base = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> # Test Discontiguous Channel Select Via Index
>>> self = base[:, :, [0, 2]]
>>> self.write_network_text()
>>> final = self._finalize()
>>> assert final.shape == (16, 16, 2)
```

Parameters

- **subdata** (*DelayedArray*) – data to operate on
- **space_slice** (*Tuple[slice, slice]*) – if specified, take this y-slice and x-slice.
- **chan_idxs** (*List[int] | None*) – if specified, take these channels / bands

_finalize()

Returns

ArrayLike

_transform_from_subdata()

optimize()

Returns

DelayedImage

Example

```
>>> # Test optimize nans
>>> from delayed_image import DelayedNans
>>> import kwimage
>>> base = DelayedNans(dsize=(100, 100), channels='a|b|c')
>>> self = base[0:10, 0:5]
>>> # Should simply return a new nan generator
>>> new = self.optimize()
>>> self.write_network_text()
>>> new.write_network_text()
>>> assert len(new.as_graph().nodes) == 1
```

_opt_fuse_crops()

Combine two consecutive crops into a single operation.

Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> base = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> # Test Fuse Crops Space Only
>>> crop1 = base[4:12, 0:16]
>>> crop2 = self = crop1[2:6, 0:8]
>>> opt = crop2._opt_fuse_crops()
>>> self.write_network_text()
>>> opt.write_network_text()
>>> opt._validate()
>>> self._validate()
```

Example

```
>>> # Test Fuse Crops Channels Only
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> base = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> crop1 = base.crop(chan_idxs=[0, 2, 1])
>>> crop2 = crop1.crop(chan_idxs=[1, 2])
>>> crop3 = self = crop2.crop(chan_idxs=[0, 1])
>>> opt = self._opt_fuse_crops()._opt_fuse_crops()
>>> self.write_network_text()
>>> opt.write_network_text()
>>> finalB = base._validate()._finalize()
>>> final1 = opt._validate()._finalize()
>>> final2 = self._validate()._finalize()
>>> assert np.all(final2[..., 0] == finalB[..., 2])
>>> assert np.all(final2[..., 1] == finalB[..., 1])
>>> assert np.all(final2[..., 0] == final1[..., 0])
>>> assert np.all(final2[..., 1] == final1[..., 1])
```

Example

```
>>> # Test Fuse Crops Space And Channels
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> base = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> crop1 = base[4:12, 0:16, [1, 2]]
>>> self = crop1[2:6, 0:8, [1]]
>>> opt = self._opt_fuse_crops()
>>> self.write_network_text()
>>> opt.write_network_text()
>>> self._validate()
>>> crop1._validate()
```

_opt_warp_after_crop()


If the child node is a warp, move it after the crop.

This is more efficient because:

1. The crop is closer to the load.
2. we are warping with less data.

Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> fpath = kwimage.grab_test_image_fpath()
>>> node0 = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> node1 = node0.warp({'scale': 0.432,
>>>                      'theta': np.pi / 3,
>>>                      'about': (80, 80),
>>>                      'shearx': .3,
>>>                      'offset': (-50, -50)})
>>> node2 = node1[10:50, 1:40]
>>> self = node2
>>> new_outer = node2._opt_warp_after_crop()
>>> print(ub.urepr(node2.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(new_outer.nesting(), nl=-1, sort=0))
>>> final0 = self._finalize()
>>> final1 = new_outer._finalize()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(final0, pnum=(2, 2, 1), fnum=1, title='raw')
>>> kwplot.imshow(final1, pnum=(2, 2, 2), fnum=1, title='optimized')
```

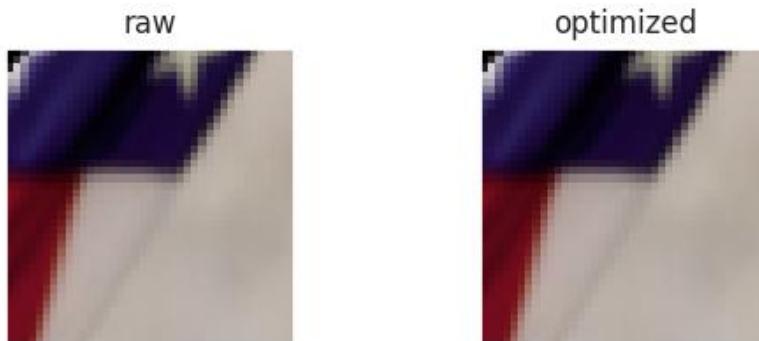

Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> from delayed_image import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> node0 = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> node1 = node0.warp({'scale': 1000 / 512})
>>> node2 = node1[250:750, 0:500]
>>> self = node2
>>> new_outer = node2._opt_warp_after_crop()
>>> print(ub.urepr(node2.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(new_outer.nesting(), nl=-1, sort=0))
```

`_opt_dequant_after_crop()`

`class kwcoco.util.delayed_ops.DelayedDequantize(subdata, quantization)`

Bases: `DelayedImage`

Rescales image intensities from int to floats.

The output is usually between 0 and 1. This also handles transforming nodata into nan values.

Parameters

- `subdata` (`DelayedArray`) – data to operate on
- `quantization` (`Dict`) – see `delayed_image.helpers.dequantize()`

`_finalize()`**Returns**

ArrayLike

`optimize()`**Returns**

DelayedImage

Example

```
>>> # Test a case that caused an error in development
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> fpath = kwimage.grab_test_image_fpath()
>>> base = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> quantization = {'quant_max': 255, 'nodata': 0}
>>> self = base.get_overview(1).dequantize(quantization)
>>> self.write_network_text()
>>> opt = self.optimize()
```

`_opt_dequant_before_other()``_transform_from_subdata()`**class** kwcoco.util.delayed_ops.DelayedFrameStack(*parts*)Bases: *DelayedStack*

Stacks multiple arrays together.

Parameters*parts* (*List[DelayedArray]*) – data to stack**class** kwcoco.util.delayed_ops.DelayedIdentity(*data*, *channels=None*, *dsize=None*)Bases: *DelayedImageLeaf*

Returns an ndarray as-is

Example

```
self = DelayedNans((10, 10), channel_spec.FusedChannelSpec.coerce('rgb')) region_slices = (slice(5, 10),
slice(1, 12)) delayed = self.crop(region_slices)
```

Example

```
>>> from delayed_image import * # NOQA
>>> arr = kwimage.checkerboard()
>>> self = DelayedIdentity(arr, channels='gray')
>>> warp = self.warp({'scale': 1.07})
>>> warp.optimize().finalize()
```

_finalize()**Returns**

ArrayLike

class kwcoco.util.delayed_ops.DelayedImage(*subdata=None, dsize=None, channels=None*)Bases: *ImageOpsMixin, DelayedArray*

For the case where an array represents a 2D image with multiple channels

Parameters

- **subdata** (*DelayedArray*)
- **dsize** (*None | Tuple[int | None, int | None]*) – overrides subdata dsize
- **channels** (*None | int | FusedChannelSpec*) – overrides subdata channels

property shapeReturns: *None | Tuple[int | None, int | None, int | None]***property num_channels**Returns: *None | int***property dsize**Returns: *None | Tuple[int | None, int | None]***property channels**Returns: *None | FusedChannelSpec***property num_overviews**Returns: *int***take_channels(*channels*)**

This method returns a subset of the vision data with only the specified bands / channels.

Parameters

channels (*List[int] | slice | channel_spec.FusedChannelSpec*) – List of integers indexes, a slice, or a channel spec, which is typically a pipe (|) delimited list of channel codes. See ChannelSpec for more details.

Returns

a new delayed load with a fused take channel operation

Return type*DelayedCrop*

Note: The channel subset must exist here or it will raise an error. A better implementation (via symbolic) might be able to do better

Example

```
>>> #
>>> # Test Channel Select Via Code
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> self = DelayedLoad.demo(dsize=(16, 16), channels='r|g|b').prepare()
>>> channels = 'r|b'
>>> new = self.take_channels(channels)._validate()
>>> new2 = new[:, :, [1, 0]]._validate()
>>> new3 = new2[:, :, [1]]._validate()
```

Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> self = DelayedLoad.demo('astro').prepare()
>>> channels = [2, 0]
>>> new = self.take_channels(channels)
>>> new3 = new.take_channels([1, 0])
>>> new._validate()
>>> new3._validate()
```

```
>>> final1 = self.finalize()
>>> final2 = new.finalize()
>>> final3 = new3.finalize()
>>> assert np.all(final1[..., 2] == final2[..., 0])
>>> assert np.all(final1[..., 0] == final2[..., 1])
>>> assert final2.shape[2] == 2
```

```
>>> assert np.all(final1[..., 2] == final3[..., 1])
>>> assert np.all(final1[..., 0] == final3[..., 0])
>>> assert final3.shape[2] == 2
```

Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> self = DelayedLoad.demo(dsize=(16, 16), channels='r|g|b').prepare()
>>> # Case where a channel doesn't exist
>>> channels = 'r|b|magic'
>>> new = self.take_channels(channels)
>>> assert len(new.parts) == 2
>>> new._validate()
```

_validate()

Check that the delayed metadata corresponds with the finalized data

_transform_from_subdata()

get_transform_from_leaf()

Returns the transformation that would align data with the leaf

evaluate()

Evaluate this node and return the data as an identity.

Returns

DelayedIdentity

_opt_push_under_concat()

Push this node under its child node if it is a concatenation operation

undo_warp(remove=None, retain=None, squash_nans=False, return_warp=False)

Attempts to “undo” warping for each concatenated channel and returns a list of delayed operations that are cropped to the right regions.

Typically you will retrain offset, theta, and shear to remove scale. This ensures the data is spatially aligned up to a scale factor.

Parameters

- **remove** (*List[str]*) – if specified, list components of the warping to remove. Can include: “offset”, “scale”, “shearx”, “theta”. Typically set this to [“scale”].
- **retain** (*List[str]*) – if specified, list components of the warping to retain. Can include: “offset”, “scale”, “shearx”, “theta”. Mutually exclusive with “remove”. If neither remove or retain is specified, retain is set to [].
- **squash_nans** (*bool*) – if True, pure nan channels are squashed into a 1x1 array as they do not correspond to a real source.
- **return_warp** (*bool*) – if True, return the transform we applied. This is useful when you need to warp objects in the original space into the jagged space.

SeeAlso:

`DelayedChannelConcat.undo_warps`

Example

```
>>> # Test similar to undo_warps, but on each channel separately
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> from delayed_image.delayed_leafs import DelayedNans
>>> import ubelt as ub
>>> import kwimage
>>> import kwarray
>>> import numpy as np
>>> # Demo case where we have different channels at different resolutions
>>> base = DelayedLoad.demo(channels='r|g|b').prepare().dequantize({'quant_max':
    ~': 255})
>>> bandR = base[:, :, 0].scale(100 / 512)[:, :-50].evaluate()
>>> bandG = base[:, :, 1].scale(300 / 512).warp({'theta': np.pi / 8, 'about': ~(150, 150)}).evaluate()
>>> bandB = base[:, :, 2].scale(600 / 512)[:, :150, :].evaluate()
>>> bandN = DelayedNans((600, 600), channels='N')
>>> B0 = bandR.scale(6, dsizes=(600, 600)).optimize()
```

(continues on next page)

(continued from previous page)

```
>>> B1 = bandG.warp({'theta': -np.pi / 8, 'about': (150, 150)}).scale(2,_
...dsizes=(600, 600)).optimize()
>>> B2 = bandB.scale(1, dsizes=(600, 600)).optimize()
>>> vidspace_box = kwimage.Boxes([-10, -10, 270, 160], 'ltrb').scale(1 / .7)._
...quantize()
>>> vidspace_poly = vidspace_box.to_polygons()[0]
>>> vidspace_slice = vidspace_box.to_slices()[0]
>>> # Test with the padded crop
>>> self0 = B0.crop(vidspace_slice, wrap=0, clip=0, pad=10).optimize()
>>> self1 = B1.crop(vidspace_slice, wrap=0, clip=0, pad=10).optimize()
>>> self2 = B2.crop(vidspace_slice, wrap=0, clip=0, pad=10).optimize()
>>> parts = [self0, self1, self2]
>>> # Run the undo on each channel
>>> undone_scale_parts = [d.undo_warp(remove=['scale']) for d in parts]
>>> print('--- Aligned --- ')
>>> stackable_aligned = []
>>> for d in parts:
>>>     d.write_network_text()
>>>     stackable_aligned.append(d.finalize())
>>> print('--- Undone Scale --- ')
>>> stackable undone_scale = []
>>> for undone in undone_scale_parts:
...     undone.write_network_text()
...     stackable undone_scale.append(undone.finalize())
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> canvas0 = kwimage.stack_images(stackable_aligned, axis=1, pad=5, bg_value='kw_darkgray')
>>> canvas2 = kwimage.stack_images(stackable undone_scale, axis=1, pad=5, bg_value='kw_darkgray')
>>> canvas0 = kwimage.draw_header_text(canvas0, 'Rescaled Channels')
>>> canvas2 = kwimage.draw_header_text(canvas2, 'Native Scale Channels')
>>> canvas = kwimage.stack_images([canvas0, canvas2], axis=0, bg_value='kw_darkgray')
>>> canvas = kwimage.fill_nans_with_checkers(canvas)
>>> kwplot.imshow(canvas)
```



```
class kwcoco.util.delayed_ops.DelayedImageLeaf(subdata=None, dsize=None, channels=None)
```

Bases: *DelayedImage*

Parameters

- **subdata** (*DelayedArray*)
- **dsize** (*None | Tuple[int | None, int | None]*) – overrides subdata dsize
- **channels** (*None | int | FusedChannelSpec*) – overrides subdata channels

get_transform_from_leaf()

Returns the transformation that would align data with the leaf

Returns

kwimage.Affine

optimize()

```
class kwcoco.util.delayed_ops.DelayedLoad(fpath, channels=None, dsize=None, nodata_method=None)
```

Bases: *DelayedImageLeaf*

Points to an image on disk to be loaded.

This is the starting point for most delayed operations. Disk IO is avoided until the `finalize` operation is called. Calling `prepare` can read image headers if metadata like the image width, height, and number of channels is not provided, but most operations can be performed while these are still unknown.

If a gdal backend is available, and the underlying image is in the appropriate formate (e.g. COG), `finalize` will return a lazy reference that enables fast overviews and crops. For image formats that do not allow for tiling / overviews, then there is no way to avoid reading entire image as an ndarray.

Example

```
>>> from delayed_image import * # NOQA
>>> self = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> data1 = self.finalize()
```

Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> # Demo code to develop support for overviews
>>> from delayed_image import * # NOQA
>>> import kwimage
>>> import ubelt as ub
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> self = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> print(f'self={self}')
>>> print('self.meta = {}'.format(ub.repr2(self.meta, nl=1)))
>>> quantization = {
>>>     'quant_max': 255,
>>>     'nodata': 0,
>>> }
>>> node0 = self
>>> node1 = node0.get_overview(2)
>>> node2 = node1[13:900, 11:700]
>>> node3 = node2.dequantize(quantization)
>>> node4 = node3.warp({'scale': 0.05})
>>> #
>>> data0 = node0._validate().finalize()
>>> data1 = node1._validate().finalize()
>>> data2 = node2._validate().finalize()
>>> data3 = node3._validate().finalize()
>>> data4 = node4._validate().finalize()
>>> node4.write_network_text()
```


Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> # Test delayed ops with int16 and nodata values
>>> from delayed_image import * # NOQA
>>> import kwimage
>>> from delayed_image.helpers import quantize_float01
>>> import ubelt as ub
>>> dpath = ub.Path.appdir('delayed_image/tests/test_delay_nodata').ensuredir()
>>> fpath = dpath / 'data.tif'
>>> data = kwimage.ensure_float01(kwimage.grab_test_image())
>>> poly = kwimage.Polygon.random(rng=321032).scale(data.shape[0])
>>> poly.fill(data, np.nan)
>>> data_uint16, quantization = quantize_float01(data)
>>> nodata = quantization['nodata']
>>> kwimage.imwrite(fpath, data_uint16, nodata=nodata, backend='gdal', overviews=3)
```

(continues on next page)

(continued from previous page)

```
>>> # Test loading the data
>>> self = DelayedLoad(fpath, channels='r|g|b', nodata_method='float').prepare()
>>> node0 = self
>>> node1 = node0.dequantize(quantization)
>>> node2 = node1.warp({'scale': 0.51}, interpolation='lanczos')
>>> node3 = node2[13:900, 11:700]
>>> node4 = node3.warp({'scale': 0.9}, interpolation='lanczos')
>>> node4.write_network_text()
>>> node5 = node4.optimize()
>>> node5.write_network_text()
>>> node6 = node5.warp({'scale': 8}, interpolation='lanczos').optimize()
>>> node6.write_network_text()
>>> #
>>> data0 = node0._validate().finalize()
>>> data1 = node1._validate().finalize()
>>> data2 = node2._validate().finalize()
>>> data3 = node3._validate().finalize()
>>> data4 = node4._validate().finalize()
>>> data5 = node5._validate().finalize()
>>> data6 = node6._validate().finalize()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> stack1 = kwimage.stack_images([data1, data2, data3, data4, data5])
>>> stack2 = kwimage.stack_images([stack1, data6], axis=1)
>>> kwplot.imshow(stack2)
```

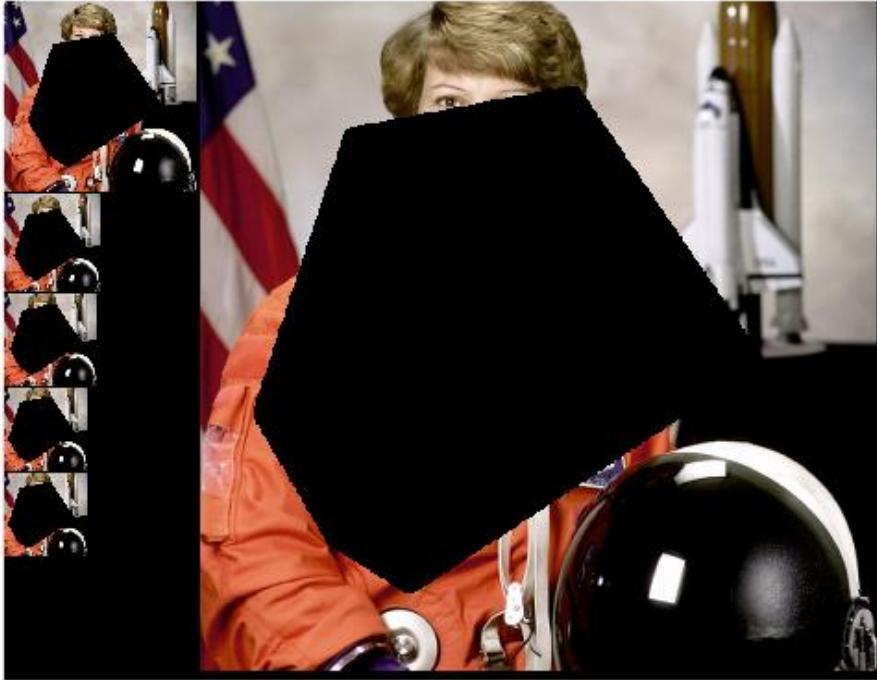

Parameters

- **fpath** (*str* | *PathLike*) – URI pointing at the image data to load
- **channels** (*int* | *str* | *FusedChannelSpec* | *None*) – the underlying channels of the image if known a-priori
- **dsize** (*Tuple[int, int]*) – The width / height of the image if known a-priori
- **nodata_method** (*str* | *None*) – How to handle nodata values in the file itself. Can be “auto”, “float”, or “ma”.

property fpath

```
classmethod demo(key='astro', channels=None, dsize=None, nodata_method=None, overviews=None)
```

Creates a demo DelayedLoad node that points to a file generated by `kwimage.grab_test_image_fpath()`.

If metadata like dsize and channels are not provided, then the `prepare()` can be used to auto-populate them at the cost of the disk IO to read image headers.

Parameters

- **key** (*str*) – which test image to grab. Valid choices are: astro - an astronaut carl - Carl Sagan paraview - ParaView logo stars - picture of stars in the sky
- **channels** (*str*) – if specified, these channels will be stored in the delayed load metadata. Note: these are not auto-populated. Usually the key corresponds to 3-channel data,
- **dsize** (*None* | *Tuple[int, int]*) – if specified, we will return a variant of the data with the specific dsize

- **nodata_method** (*str | None*) – How to handle nodata values in the file itself. Can be “auto”, “float”, or “ma”.
- **overviews** (*None | int*) – if specified, will return a variant of the data with overviews

Returns

DelayedLoad

Example

```
>>> from delayed_image.delayed_leafs import * # NOQA
>>> import delayed_image
>>> delayed = delayed_image.DelayedLoad.demo()
>>> print(f'delayed={delayed}')
>>> delayed.prepare()
>>> print(f'delayed={delayed}')
>>> delayed = DelayedLoad.demo(channels='r|g|b', nodata_method='float')
>>> print(f'delayed={delayed}')
>>> delayed.prepare()
>>> print(f'delayed={delayed}')
>>> delayed.finalize()
```

_load_reference()**prepare()**

If metadata is missing, perform minimal IO operations in order to prepopulate metadata that could help us better optimize the operation tree.

Returns

DelayedLoad

_load_metadata()**_finalize()****Returns**

ArrayLike

Example

```
>>> # Check difference between finalize and _finalize
>>> from delayed_image.delayed_leafs import * # NOQA
>>> self = DelayedLoad.demo().prepare()
>>> final_arr = self.finalize()
>>> assert isinstance(final_arr, np.ndarray), 'finalize should always return an array'
>>> final_ref = self._finalize()
>>> if self.lazy_ref is not NotImplemented:
>>>     assert not isinstance(final_ref, np.ndarray), (
>>>         'A pure load with gdal should return a reference that is similar to but not quite an array')
```

```
class kwcoco.util.delayed_ops.DelayedNans(dsize=None, channels=None)
```

Bases: *DelayedImageLeaf*

Constructs nan channels as needed

Example

```
self = DelayedNans((10, 10), channel_spec.FusedChannelSpec.coerce('rgb')) region_slices = (slice(5, 10), slice(1, 12)) delayed = self.crop(region_slices)
```

Example

```
>>> from delayed_image import * # NOQA
>>> dsize = (307, 311)
>>> c1 = DelayedNans(dsize=dsize, channels='foo')
>>> c2 = DelayedLoad.demo('astro', dsize=dsize, channels='R|G|B').prepare()
>>> cat = DelayedChannelConcat([c1, c2])
>>> warped_cat = cat.warp({'scale': 1.07}, dsize=(328, 332))._validate()
>>> warped_cat._validate().optimize().finalize()
```

`_finalize()`

Returns

ArrayLike

`_optimized_crop(space_slice=None, chan_idxs=None)`

Crops an image along integer pixel coordinates.

Parameters

- `space_slice` (*Tuple[slice, slice]*) – y-slice and x-slice.
- `chan_idxs` (*List[int]*) – indexes of bands to take

Returns

DelayedImage

`_optimized_warp(transform, dsize=None, **warp_kwargs)`

Returns

DelayedImage

```
class kwcoco.util.delayed_ops.DelayedNaryOperation(parts)
```

Bases: *DelayedOperation*

For operations that have multiple input arrays

`children()`

Yields

Any

```
class kwcoco.util.delayed_ops.DelayedOperation
```

Bases: *NiceRepr*

nesting()**Returns**

Dict[str, dict]

as_graph(fields='auto')

Builds the underlying graph structure as a networkx graph with human readable labels.

Parameters**fields (str | List[str])** – Add the specified fields as labels. If ‘auto’ then does something “reasonable”. If ‘all’ then shows everything. TODO: only implemented for “auto” and “all”, implement general field selection (PR Wanted).**Returns**

networkx.DiGraph

_traverse()

A flat list of all descendent nodes and their parents

Yields*Tuple[None | DelayedOperation, DelayedOperation]* – tuples of parent / child nodes. Discarding the parents will be a list of all nodes.**leafs()**

Iterates over all leafs in the tree.

Yields*Tuple[DelayedOperation]***_leafs()**

Iterates over all leafs in the tree.

Yields*Tuple[DelayedOperation]***_leaf_paths()**

Builds all independent paths to leafs.

Yields*Tuple[DelayedOperation, DelayedOperation]* – The leaf, and the path to it,**Example**

```
>>> from delayed_image import demo
>>> self = demo.non_aligned_leafs()
>>> for leaf, part in list(self._leaf_paths()):
...     leaf.write_network_text()
...     part.write_network_text()
```

Example

```
>>> from delayed_image import demo
>>> import delayed_image
>>> orig = delayed_image.DelayedLoad.demo().prepare()
>>> part1 = orig[0:100, 0:100].scale(2, dsize=(128, 128))
>>> part2 = delayed_image.DelayedNans(dsize=(128, 128))
>>> self = delayed_image.DelayedChannelConcat([part2, part1])
>>> for leaf, part in list(self._leaf_paths()):
...     leaf.write_network_text()
...     part.write_network_text()
```

`_traversed_graph()`

A flat list of all descendent nodes and their parents

`print_graph(fields='auto', with_labels=True, rich='auto', vertical_chains=True)`

Alias for `write_network_text`

`write_network_text(fields='auto', with_labels=True, rich='auto', vertical_chains=True)`

`property shape`

Returns: None | Tuple[int | None, ...]

`children()`

`Yields`

`Any`

`prepare()`

If metadata is missing, perform minimal IO operations in order to prepopulate metadata that could help us better optimize the operation tree.

`Returns`

`DelayedOperation`

`_finalize()`

This is the method that new nodes should overload.

Conceptually this works just like the `finalize` method with the exception that it happens at every node in the tree, whereas the public facing method only happens once, calls this, and is able to do one-time pre and post operations.

`Returns`

`ArrayLike`

`finalize(prepare=True, optimize=True, **kwargs)`

Evaluate the operation tree in full.

`Parameters`

- `prepare (bool)` – ensure `prepare` is called to ensure metadata exists if possible before optimizing. Defaults to True.
- `optimize (bool)` – ensure the graph is optimized before loading. Default to True.
- `**kwargs` – for backwards compatibility, these will allow for in-place modification of select nested parameters.

`Returns`

`ArrayLike`

Notes

Do not overload this method. Overload `DelayedOperation._finalize()` instead.

`optimize()`

Returns

`DelayedOperation`

`_set_nested_params(**kwargs)`

Hack to override nested params on all warps for things like interpolation / antialias

`class kwcoco.util.delayed_ops.DelayedOverview(subdata, overview)`


Bases: `DelayedImage`

Downsamples an image by a factor of two.

If the underlying image being loaded has precomputed overviews it simply loads these instead of downsampling the original image, which is more efficient.

Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> # Make a complex chain of operations and optimize it
>>> from delayed_image import * # NOQA
>>> import kwimage
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> dimg = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> dimg = dimg.get_overview(1)
>>> dimg = dimg.get_overview(1)
>>> dimg = dimg.get_overview(1)
>>> dopt = dimg.optimize()
>>> if 1:
>>>     import networkx as nx
>>>     dimg.write_network_text()
>>>     dopt.write_network_text()
>>>     print(ub.urepr(dopt.nesting(), nl=-1, sort=0))
>>>     final0 = dimg._finalize()[:]
>>>     final1 = dopt._finalize()[:]
>>>     assert final0.shape == final1.shape
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(final0, pnum=(1, 2, 1), fnum=1, title='raw')
>>> kwplot.imshow(final1, pnum=(1, 2, 2), fnum=1, title='optimized')
```

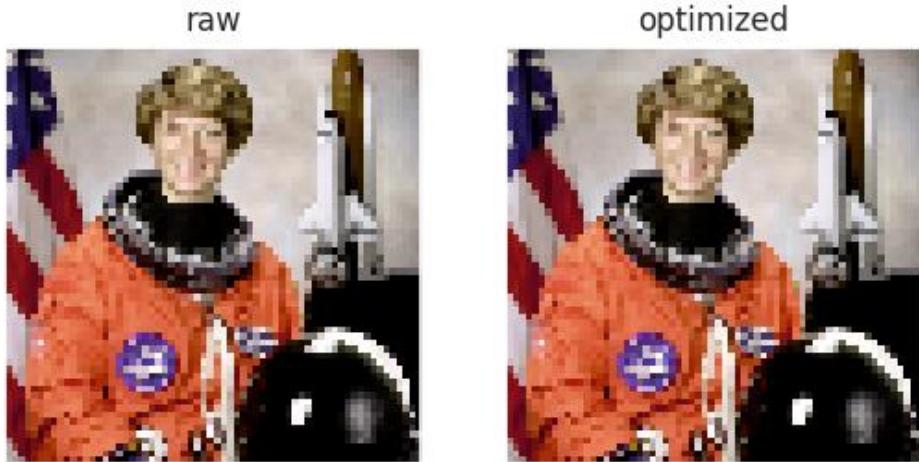

Parameters

- **subdata** (*DelayedArray*) – data to operate on
- **overview** (*int*) – the overview to use (assuming it exists)

property num_overviews

Returns: int

_finalize()

Returns

ArrayLike

optimize()

Returns

DelayedImage

_transform_from_subdata()

_opt_overview_as_warp()

Sometimes it is beneficial to replace an overview with a warp as an intermediate optimization step.

_opt_crop_after_overview()

Given an outer overview and an inner crop, switch places. We want the overview to be as close to the load as possible.

Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> from delayed_image import * # NOQA
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> node0 = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> node1 = node0[100:400, 120:450]
>>> node2 = node1.get_overview(2)
>>> self = node2
>>> new_outer = node2.optimize()
>>> print(ub.urepr(node2.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(new_outer.nesting(), nl=-1, sort=0))
>>> final0 = self._finalize()
>>> final1 = new_outer._finalize()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(final0, pnum=(1, 2, 1), fnum=1, title='raw')
>>> kwplot.imshow(final1, pnum=(1, 2, 2), fnum=1, title='optimized')
```



Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> from delayed_image import * # NOQA
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> node0 = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> node1 = node0[:, :, 0:2]
>>> node2 = node1.get_overview(2)
>>> self = node2
>>> new_outer = node2.optimize()
>>> node2.write_network_text()
>>> new_outer.write_network_text()
>>> assert node2.shape[2] == 2
>>> assert new_outer.shape[2] == 2
```

_opt_fuse_overview()

_opt_dequant_after_overview()

_opt_warp_after_overview()

Given an warp followed by an overview, move the warp to the outer scope such that the overview is first.

Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> from delayed_image import * # NOQA
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> node0 = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> node1 = node0.warp({'scale': (2.1, .7), 'offset': (20, 40)})
>>> node2 = node1.get_overview(2)
>>> self = node2
>>> new_outer = node2.optimize()
>>> print(ub.urepr(node2.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(new_outer.nesting(), nl=-1, sort=0))
>>> final0 = self._finalize()
>>> final1 = new_outer._finalize()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(final0, pnum=(1, 2, 1), fnum=1, title='raw')
>>> kwplot.imshow(final1, pnum=(1, 2, 2), fnum=1, title='optimized')
```



```
class kwcoco.util.delayed_ops.DelayedStack(parts, axis)
```

Bases: *DelayedNaryOperation*

Stacks multiple arrays together.

Parameters

- **parts** (*List[DelayedArray]*) – data to stack
- **axis** (*int*) – axes to stack on

property shape

Returns: *None | Tuple[int | None, ...]*

```
class kwcoco.util.delayed_ops.DelayedUnaryOperation(subdata)
```

Bases: *DelayedOperation*

For operations that have a single input array

children()

Yields

Any

```
class kwcoco.util.delayed_ops.DelayedWarp(subdata, transform, dsizes='auto', antialias=True,  
interpolation='linear', border_value='auto', noop_eps=0)
```

Bases: *DelayedImage*

Applies an affine transform to an image.

Example

```
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> self = DelayedLoad.demo(dsize=(16, 16)).prepare()
>>> warp1 = self.warp({'scale': 3})
>>> warp2 = warp1.warp({'theta': 0.1})
>>> warp3 = warp2._opt_fuse_warps()
>>> warp3._validate()
>>> print(ub.urepr(warp2.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(warp3.nesting(), nl=-1, sort=0))
```

Parameters

- **subdata** (*DelayedArray*) – data to operate on
- **transform** (*ndarray* | *dict* | *kwimage.Affine*) – a coercable affine matrix. See [kwimage.Affine](#) for details on what can be coerced.
- **dsize** (*Tuple[int, int]* | *str*) – The width / height of the output canvas. If ‘auto’, dsize is computed such that the positive coordinates of the warped image will fit in the new canvas. In this case, any pixel that maps to a negative coordinate will be clipped. This has the property that the input transformation is not modified.
- **antialias** (*bool*) – if True determines if the transform is downsampling and applies antialiasing via gaussian a blur. Defaults to False
- **interpolation** (*str*) – interpolation code or cv2 integer. Interpolation codes are linear, nearest, cubic, lanczos, and area. Defaults to “linear”.
- **noop_eps** (*float*) – This is the tolerance for optimizing a warp away. If the transform has all of its decomposed parameters (i.e. scale, rotation, translation, shear) less than this value, the warp node can be optimized away. Defaults to 0.

property transform

Returns: *kwimage.Affine*

_finalize()

Returns

ArrayLike

optimize()

Returns

DelayedImage

Example

```
>>> # Demo optimization that removes a noop warp
>>> from delayed_image import DelayedLoad
>>> import kwimage
>>> base = DelayedLoad.demo(channels='r|g|b').prepare()
>>> self = base.warp(kwimage.Affine.eye())
>>> new = self.optimize()
>>> assert len(self.as_graph().nodes) == 2
>>> assert len(new.as_graph().nodes) == 1
```

Example

```
>>> # Test optimize nans
>>> from delayed_image import DelayedNans
>>> import kwimage
>>> base = DelayedNans(dsize=(100, 100), channels='a|b|c')
>>> self = base.warp(kwimage.Affine.scale(0.1))
>>> # Should simply return a new nan generator
>>> new = self.optimize()
>>> assert len(new.as_graph().nodes) == 1
```

Example

```
>>> # Test optimize nans
>>> from delayed_image import DelayedLoad
>>> import kwimage
>>> base = DelayedLoad.demo(channels='r|g|b').prepare()
>>> transform = kwimage.Affine.scale(1.0 + 1e-7)
>>> self = base.warp(transform, dsize=base.dsize)
>>> # An optimize will not remove a warp if there is any
>>> # doubt if it is the identity.
>>> new = self.optimize()
>>> assert len(self.as_graph().nodes) == 2
>>> assert len(new.as_graph().nodes) == 2
>>> # But we can specify a threshold where it will
>>> self._set_nested_params(noop_eps=1e-6)
>>> new = self.optimize()
>>> assert len(self.as_graph().nodes) == 2
>>> assert len(new.as_graph().nodes) == 1
```

`_transform_from_subdata()`

`_opt_fuse_warps()`

Combine two consecutive warps into a single operation.

`_opt_absorb_overview()`

Remove any deeper overviews that would be undone by this warp.

Given this warp node, if it has a scale component could undo an overview (i.e. the scale factor is greater than 2), we want to:

1. determine if there is an overview deeper in the tree.
2. remove that overview and that scale factor from this warp
3. modify any intermediate nodes that will be changed by having the deeper overview removed.

Note: This optimization is currently the most dubious one in the code, and is likely where some of the bugs are coming from. Help wanted.

CommandLine

```
xdotest -m delayed_image.delayed_nodes DelayedWarp._opt_absorb_overview
```

Example

```
>>> # xdotest: +REQUIRES(module:osgeo)
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> import kwimage
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> base = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> # Case without any operations between the overview and warp
>>> self = base.get_overview(1).warp({'scale': 4})
>>> self.write_network_text()
>>> opt = self._opt_absorb_overview()._validate()
>>> opt.write_network_text()
>>> opt_data = [d for n, d in opt.as_graph().nodes(data=True)]
>>> assert 'DelayedOverview' not in [d['type'] for d in opt_data]
>>> # Case with a chain of operations between overview and warp
>>> self = base.get_overview(1)[0:101, 0:100].warp({'scale': 4})
>>> self.write_network_text()
>>> opt = self._opt_absorb_overview()._validate()
>>> opt.write_network_text()
>>> opt_data = [d for n, d in opt.as_graph().nodes(data=True)]
>>> #assert opt_data[1]['meta']['space_slice'] == (slice(0, 202, None), slice(0, -200, None))
>>> assert opt_data[1]['meta']['space_slice'] == (slice(0, 204, None), slice(0, -202, None))
>>> # Any sort of complex chain does prevents this optimization
>>> # from running.
>>> self = base.get_overview(1)[0:101, 0:100][0:50, 0:50].warp({'scale': 4})
>>> opt = self._opt_absorb_overview()._validate()
>>> opt.write_network_text()
>>> opt_data = [d for n, d in opt.as_graph().nodes(data=True)]
>>> assert 'DelayedOverview' in [d['type'] for d in opt_data]
```

_opt_split_warp_overview()

Split this node into a warp and an overview if possible

Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> import kwimage
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> self = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> print(f'self={self}')
>>> print('self.meta = {}'.format(ub.urepr(self.meta, nl=1)))
>>> warp0 = self.warp({'scale': 0.2})
>>> warp1 = warp0._opt_split_warp_overview()
>>> warp2 = self.warp({'scale': 0.25}) ._opt_split_warp_overview()
>>> print(ub.urepr(warp0.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(warp1.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(warp2.nesting(), nl=-1, sort=0))
>>> warp0_nodes = [d['type'] for d in warp0.as_graph().nodes.values()]
>>> warp1_nodes = [d['type'] for d in warp1.as_graph().nodes.values()]
>>> warp2_nodes = [d['type'] for d in warp2.as_graph().nodes.values()]
>>> assert warp0_nodes == ['DelayedWarp', 'DelayedLoad']
>>> assert warp1_nodes == ['DelayedWarp', 'DelayedOverview', 'DelayedLoad']
>>> assert warp2_nodes == ['DelayedOverview', 'DelayedLoad']
```

Example

```
>>> # xdoctest: +REQUIRES(module:osgeo)
>>> from delayed_image.delayed_nodes import * # NOQA
>>> from delayed_image import DelayedLoad
>>> import kwimage
>>> fpath = kwimage.grab_test_image_fpath(overviews=3)
>>> self = DelayedLoad(fpath, channels='r|g|b').prepare()
>>> warp0 = self.warp({'scale': 1 / 2 ** 6})
>>> opt = warp0.optimize()
>>> print(ub.urepr(warp0.nesting(), nl=-1, sort=0))
>>> print(ub.urepr(opt.nesting(), nl=-1, sort=0))
>>> warp0_nodes = [d['type'] for d in warp0.as_graph().nodes.values()]
>>> opt_nodes = [d['type'] for d in opt.as_graph().nodes.values()]
>>> assert warp0_nodes == ['DelayedWarp', 'DelayedLoad']
>>> assert opt_nodes == ['DelayedWarp', 'DelayedOverview', 'DelayedLoad']
```

`class kwococo.util.delayed_ops.ImageOpsMixin`

Bases: `object`

`crop(space_slice=None, chan_idxs=None, clip=True, wrap=True, pad=0)`

Crops an image along integer pixel coordinates.

Parameters

- `space_slice (Tuple[slice, slice])` – y-slice and x-slice.
- `chan_idxs (List[int])` – indexes of bands to take
- `clip (bool)` – if True, the slice is interpreted normally, where it won't go past the image extent, otherwise slicing into negative regions or past the image bounds will result in padding.

Defaults to True.

- **wrap** (*bool*) – if True, negative indexes “wrap around”, otherwise they are treated as is.
Defaults to True.
- **pad** (*int | List[Tuple[int, int]]*) – if specified, applies extra padding

Returns

DelayedImage

Example

```
>>> from delayed_image import DelayedLoad
>>> import kwimage
>>> self = DelayedLoad.demo().prepare()
>>> self = self.dequantize({'quant_max': 255})
>>> self = self.warp({'scale': 1 / 2})
>>> pad = 0
>>> h, w = space_dims = self.dszie[::-1]
>>> grid = list(ub.named_product({
>>>     'left': [0, -64], 'right': [0, 64],
>>>     'top': [0, -64], 'bot': [0, 64],}))
>>> grid += [
>>>     {'left': 64, 'right': -64, 'top': 0, 'bot': 0},
>>>     {'left': 64, 'right': 64, 'top': 0, 'bot': 0},
>>>     {'left': 0, 'right': 0, 'top': 64, 'bot': -64},
>>>     {'left': 64, 'right': -64, 'top': 64, 'bot': -64},
>>> ]
>>> crops = []
>>> for pads in grid:
>>>     space_slice = (slice(pads['top']), h + pads['bot']),
>>>                  slice(pads['left']), w + pads['right']))
>>>     delayed = self.crop(space_slice)
>>>     crop = delayed.finalize()
>>>     yyxx = kwimage.Boxes.from_slice(space_slice, wrap=False, clip=0).
>>>     toformat('_yyxx').data[0]
>>>     title = '[{}:{}], [{}:{}]'.format(*yyxx)
>>>     crop_canvas = kwimage.draw_header_text(crop, title, fit=True, bg_color=
>>>     'kw_darkgray')
>>>     crops.append(crop_canvas)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> canvas = kwimage.stack_images_grid(crops, pad=16, bg_value='kw_darkgreen')
>>> canvas = kwimage.fill_nans_with_checkers(canvas)
>>> kwplot.imshow(canvas, title='Normal Slicing: Cropped Images With_
>>> Wrap+Clipped Slices', doclf=1, fnum=1)
>>> kwplot.show_if_requested()
```

Normal Slicing: Cropped Images With Wrap+Clipped Slices



Example

```
>>> # Demo the case with pads / no-clips / no-wraps
>>> from delayed_image import DelayedLoad
>>> import kwimage
>>> self = DelayedLoad.demo().prepare()
>>> self = self.dequantize({'quant_max': 255})
>>> self = self.warp({'scale': 1 / 2})
>>> pad = [(64, 128), (32, 96)]
>>> pad = [(0, 20), (0, 0)]
>>> pad = 0
>>> pad = 8
>>> h, w = space_dims = self.dszie[::-1]
>>> grid = list(ub.named_product({
>>>     'left': [0, -64], 'right': [0, 64],
>>>     'top': [0, -64], 'bot': [0, 64],}))
>>> grid += [
>>>     {'left': 64, 'right': -64, 'top': 0, 'bot': 0},
>>>     {'left': 64, 'right': 64, 'top': 0, 'bot': 0},
>>>     {'left': 0, 'right': 0, 'top': 64, 'bot': -64},
>>>     {'left': 64, 'right': -64, 'top': 64, 'bot': -64},
>>> ]
>>> crops = []
>>> for pads in grid:
>>>     space_slice = (slice(pads['top']), h + pads['bot']),

```

(continues on next page)

(continued from previous page)

```

>>>         slice(pads['left'], w + pads['right']))
>>>     delayed = self._padded_crop(space_slice, pad=pad)
>>>     crop = delayed.finalize(optimize=1)
>>>     yyxx = kwimage.Boxes.from_slice(space_slice, wrap=False, clip=0).
>>>         toformat('_yyxx').data[0]
>>>     title = '[{:}:{:}, {:}:{:}]'.format(*yyxx)
>>>     if pad:
>>>         title += f'{chr(10)}{pad={pad}}'
>>>     crop_canvas = kwimage.draw_header_text(crop, title, fit=True, bg_color=
>>>         'kw_darkgray')
>>>     crops.append(crop_canvas)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> canvas = kwimage.stack_images_grid(crops, pad=16, bg_value='kw_darkgreen',_
>>>         _resize='smaller')
>>> canvas = kwimage.fill_nans_with_checkers(canvas)
>>> kwplot.imshow(canvas, title='Negative Slicing: Cropped Images With_
>>>         _clip=False wrap=False', doclf=1, fnum=2)
>>> kwplot.show_if_requested()

```

Negative Slicing: Cropped Images With `clip=False wrap=False`**_padded_crop(space_slice, pad=0)**

Does the type of padded crop we want, but inefficiently using a warp. Reimplementing would be good, but this is good enough for now.

warp(transform, dsize='auto', **warp_kwargs)

Applies an affine transformation to the image. See [DelayedWarp](#).

Parameters

- **transform** (*ndarray | dict | kwimage.Affine*) – a coercable affine matrix. See [kwimage.Affine](#) for details on what can be coerced.
- **dsizes** (*Tuple[int, int] | str*) – The width / height of the output canvas. If ‘auto’, dsizes is computed such that the positive coordinates of the warped image will fit in the new canvas. In this case, any pixel that maps to a negative coordinate will be clipped. This has the property that the input transformation is not modified.
- **antialias** (*bool*) – if True determines if the transform is downsampling and applies antialiasing via gaussian a blur. Defaults to False
- **interpolation** (*str*) – interpolation code or cv2 integer. Interpolation codes are linear, nearest, cubic, lancsoz, and area. Defaults to “linear”.
- **border_value** (*int | float | str*) – if auto will be nan for float and 0 for int.
- **noop_eps** (*float*) – This is the tolerance for optimizing a warp away. If the transform has all of its decomposed parameters (i.e. scale, rotation, translation, shear) less than this value, the warp node can be optimized away. Defaults to 0.

Returns

`DelayedImage`

scale(*scale*, *dsizes='auto'*, ***warp_kwargs*)

An alias for `self.warp({“scale”: scale}, ...)`

resize(*dsizes*, ***warp_kwargs*)

Resize an image to a specific width/height by scaling it.

dequantize(*quantization*)

Rescales image intensities from int to floats.

Parameters

quantization (*Dict[str, Any]*) – quantization information dictionary to undo. see `delayed_image.helpers.dequantize()` Expected keys are: orig_dtype (str) orig_min (float) orig_max (float) quant_min (float) quant_max (float) nodata (None | int)

Returns

`DelayedDequantize`

Example

```
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> self = DelayedLoad.demo().prepare()
>>> quantization = {
>>>     'orig_dtype': 'float32',
>>>     'orig_min': 0,
>>>     'orig_max': 1,
>>>     'quant_min': 0,
>>>     'quant_max': 255,
>>>     'nodata': None,
>>> }
>>> new = self.dequantize(quantization)
```

(continues on next page)

(continued from previous page)

```
>>> assert self.finalize().max() > 1
>>> assert new.finalize().max() <= 1
```

get_overview(overview)

Downsamples an image by a factor of two.

Parameters

`overview (int)` – the overview to use (assuming it exists)

Returns

`DelayedOverview`

as_xarray()

Returns

`DelayedAsXarray`

get_transform_from(src)

Find a transform from a given node (src) to this node (self / dst).

Given two delayed images src and dst that share a common leaf, find the transform from src to dst.

Parameters

`src (DelayedOperation)` – the other view to get a transform to. This must share a leaf with self (which is the dst).

Returns

The transform that warps the space of src to the space of self.

Return type

`kwimage.Affine`

Example

```
>>> from delayed_image import * # NOQA
>>> from delayed_image.delayed_leafs import DelayedLoad
>>> base = DelayedLoad.demo().prepare()
>>> src = base.scale(2)
>>> dst = src.warp({'scale': 4, 'offset': (3, 5)})
>>> transform = dst.get_transform_from(src)
>>> tf = transform.decompose()
>>> assert tf['scale'] == (4, 4)
>>> assert tf['offset'] == (3, 5)
```

Example

```
>>> from delayed_image import demo
>>> self = demo.non_aligned_leafs()
>>> leaf = list(self._leaf_paths())[0][0]
>>> tf1 = self.get_transform_from(leaf)
>>> tf2 = leaf.get_transform_from(self)
>>> np.allclose(np.linalg.inv(tf2), tf1)
```

2.1.1.6.2 Submodules

2.1.1.6.2.1 kwcoco.util.dict_like module

class kwcoco.util.dict_like.DictLike

Bases: NiceRepr

An inherited class must specify the `getitem`, `setitem`, and `keys` methods.

A class is dictionary like if it has:

`__iter__`, `__len__`, `__contains__`, `__getitem__`, `items`, `keys`, `values`, `get`,
and if it should be writable it should have: `__delitem__`, `__setitem__`, `update`,
And perhaps: `copy`,

`__iter__`, `__len__`, `__contains__`, `__getitem__`, `items`, `keys`, `values`, `get`,
and if it should be writable it should have: `__delitem__`, `__setitem__`, `update`,
And perhaps: `copy`,

getitem(key)

Parameters

key (*Any*) – a key

Returns

a value

Return type

Any

setitem(key, value)

Parameters

- key (*Any*)
- value (*Any*)

delitem(key)

Parameters

key (*Any*)

keys()

Yields

Any – a key

items()

Yields

Tuple[Any, Any] – a key value pair

values()

Yields

Any – a value

`copy()`

Return type
Dict

`to_dict()`

Return type
Dict

`asdict()`

Return type
Dict

`update(other)`

`get(key, default=None)`

Parameters

- **key** (*Any*)
- **default** (*Any*)

Return type
Any

`class kwcoco.util.dict_like.DictProxy`

Bases: `DictLike`

Allows an object to proxy the behavior of a dict attribute

`keys()`

2.1.1.6.2.2 `kwcoco.util.dict_proxy2` module

`class kwcoco.util.dict_proxy2.DictInterface`

Bases: `object`

An inherited class must specify the `getitem`, `setitem`, and
keys methods.

A class is dictionary like if it has:

`__iter__`, `__len__`, `__contains__`, `__getitem__`, `items`, `keys`, `values`, `get`,
and if it should be writable it should have: `__delitem__`, `__setitem__`, `update`,
And perhaps: `copy`,

`__iter__`, `__len__`, `__contains__`, `__getitem__`, `items`, `keys`, `values`, `get`,
and if it should be writable it should have: `__delitem__`, `__setitem__`, `update`,
And perhaps: `copy`,

Example

```
from scriptconfig.dict_like import DictLike class DuckDict(DictLike):
```

```
    def __init__(self, _data=None):
        if _data is None:
            _data = {}
        self._data = _data

    def getitem(self, key):
        return self._data[key]

    def keys(self):
        return self._data.keys()

    self = DuckDict({1: 2, 3: 4}) print(f'self._data={self._data}') cast = dict(self) print(f'cast={cast}')
    print(f'self={self}')
    keys()
```

Yields

str

```
items()
```

Yields

Tuple[Any, Any] – a key value pair

```
values()
```

Yields

Any – a value

```
update(other)
```

```
get(key, default=None)
```

Parameters

- **key** (*Any*)
- **default** (*Any*)

Return type

Any

```
class kwcocoo.util.dict_proxy2.DictProxy2
```

Bases: *DictInterface*

Allows an object to proxy the behavior of a `_proxy` dict attribute

```
keys()
```

```
class kwcocoo.util.dict_proxy2._AliasMetaclass(name, bases, namespace, *args, **kwargs)
```

Bases: *type*

Populates the `__alias_to_aliases` field at class definition time to reduce the overhead of instance creation.

```
class kwcoc.util.dict_proxy2.AliasedDictProxy
```

Bases: *DictProxy2*

Can have a class attribute called ```__alias_to_primary__``` which is a Dict[str, str] mapping alias-keys to primary-keys.

Need to handle cases:

- **image dictionary contains no primary / aliased keys**
 - primary keys used
- **image dictionary only has aliased keys**
 - aliased keys are updated
- **image dictionary only has primary keys**
 - primary keys are updated
- **image dictionary only both primary and aliased keys**
 - both keys are updated

Example

```
>>> from kwcoc.util.dict_proxy2 import * # NOQA
>>> class MyAliasedObject(AliasedDictProxy):
>>>     __alias_to_primary__ = {
>>>         'foo_alias1': 'foo_primary',
>>>         'foo_alias2': 'foo_primary',
>>>         'bar_alias1': 'bar_primary',
>>>     }
>>>     def __init__(self, obj):
>>>         self._proxy = obj
>>>     def __repr__(self):
>>>         return repr(self._proxy)
>>>     def __str__(self):
>>>         return str(self._proxy)
>>> # Test starting from empty
>>> obj = MyAliasedObject({})
>>> obj['regular_key'] = 'val0'
>>> assert 'foo_primary' not in obj
>>> assert 'foo_alias1' not in obj
>>> assert 'foo_alias2' not in obj
>>> obj['foo_primary'] = 'val1'
>>> assert 'foo_primary' in obj
>>> assert 'foo_alias1' in obj
>>> assert 'foo_alias2' in obj
>>> obj['foo_alias1'] = 'val2'
>>> obj['foo_alias2'] = 'val3'
>>> obj['bar_alias1'] = 'val4'
>>> obj['bar_primary'] = 'val5'
>>> assert obj._proxy == {
>>>     'regular_key': 'val0',
>>>     'foo_primary': 'val3',
>>>     'bar_primary': 'val5'}
```

(continues on next page)

(continued from previous page)

```

>>> # Test starting with primary keys
>>> obj = MyAliasedObject({
>>>     'foo_primary': 123,
>>>     'bar_primary': 123,
>>> })
>>> assert 'foo_alias1' in obj
>>> assert 'bar_alias1' in obj
>>> obj['bar_alias1'] = 456
>>> obj['foo_primary'] = 789
>>> assert obj._proxy == {
>>>     'foo_primary': 789,
>>>     'bar_primary': 456}
>>> # Test that if aliases keys are existant we dont add primary keys
>>> obj = MyAliasedObject({
>>>     'foo_alias1': 123,
>>> })
>>> assert 'foo_alias1' in obj
>>> assert 'foo_primary' in obj
>>> obj['foo_alias1'] = 456
>>> obj['foo_primary'] = 789
>>> assert obj._proxy == {
>>>     'foo_alias1': 789,
>>> }
>>> # Test that if primary and aliases keys exist, we update both
>>> obj = MyAliasedObject({
>>>     'foo_primary': 3,
>>>     'foo_alias2': 5,
>>> })
>>> # We do not attempt to detect conflicts
>>> assert obj['foo_primary'] == 3
>>> assert obj['foo_alias1'] == 3
>>> assert obj['foo_alias2'] == 5
>>> obj['foo_alias1'] = 23
>>> assert obj['foo_primary'] == 23
>>> assert obj['foo_alias1'] == 23
>>> assert obj['foo_alias2'] == 23
>>> obj['foo_primary'] = -12
>>> assert obj['foo_primary'] == -12
>>> assert obj['foo_alias1'] == -12
>>> assert obj['foo_alias2'] == -12
>>> assert obj._proxy == {
>>>     'foo_primary': -12,
>>>     'foo_alias2': -12}

```

keys()

2.1.1.6.2.3 kwcoco.util.jsonschema_elements module

Functional interface into defining jsonschema structures.

See mixin classes for details.

Perhaps [Voluptuous] does this better and we should switch to that?

References

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> elem = SchemaElements()
>>> for base in SchemaElements.__bases__:
>>>     print('\n\n====\nbase = {!r}'.format(base))
>>>     attrs = [key for key in dir(base) if not key.startswith('_')]
>>>     for key in attrs:
>>>         value = getattr(elem, key)
>>>         print('{} = {}'.format(key, value))
```

`class kwcoco.util.jsonschema_elements.Element(base, options={}, _magic=None)`

Bases: `dict`

A dictionary used to define an element of a JSON Schema.

The exact keys/values for the element will depend on the type of element being described. The `SchemaElements` defines exactly what these are for the core elements. (e.g. OBJECT, INTEGER, NULL, ARRAY, ANYOF)

Example

```
>>> from kwcoco.coco_schema import * # NOQA
>>> self = Element(base={'type': 'demo'}, options={'opt1': 'opt2'})
>>> new = self(opt1=3)
>>> print('self = {}'.format(ub.urepr(self, nl=1, sort=1)))
>>> print('new = {}'.format(ub.urepr(new, nl=1, sort=1)))
>>> print('new2 = {}'.format(ub.urepr(new(), nl=1, sort=1)))
>>> print('new3 = {}'.format(ub.urepr(new(title='myvar'), nl=1, sort=1)))
>>> print('new4 = {}'.format(ub.urepr(new(title='myvar')(examples=['']), nl=1, sort=1)))
>>> print('new5 = {}'.format(ub.urepr(new(badattr=True), nl=1, sort=1)))
self = {
    'type': 'demo',
}
new = {
    'opt1': 3,
    'type': 'demo',
}
new2 = {
    'opt1': 3,
    'type': 'demo',
}
new3 = {
```

(continues on next page)

(continued from previous page)

```
'opt1': 3,
'title': 'myvar',
'type': 'demo',
}
new4 = {
    'examples': [''],
    'opt1': 3,
    'title': 'myvar',
    'type': 'demo',
}
new5 = {
    'opt1': 3,
    'type': 'demo',
}
```

Parameters

- **base** (*dict*) – the keys / values this schema must contain
- **options** (*dict*) – the keys / values this schema may contain
- **_magic** (*callable | None*) – called when creating an instance of this schema element. Allows convinience attributes to be converted to the formal jsonschema specs. TODO: _magic is a terrible name, we need to rename it with something descriptive.

validate(*instance=NoParam*)

If *instance* is given, validates that that dictionary conforms to this schema. Otherwise validates that this is a valid schema element.

Parameters

instance (*dict*) – a dictionary to validate

class kwcoco.util.jsonschema_elements.ScalarElements

Bases: [object](#)

Single-valued elements

property NULL

[//json-schema.org/understanding-json-schema/reference/null.html](https://json-schema.org/understanding-json-schema/reference/null.html)

Type

[https](https://)

property BOOLEAN

[//json-schema.org/understanding-json-schema/reference/null.html](https://json-schema.org/understanding-json-schema/reference/null.html)

Type

[https](https://)

property STRING

[//json-schema.org/understanding-json-schema/reference/string.html](https://json-schema.org/understanding-json-schema/reference/string.html)

Type

[https](https://)

property NUMBER

[//json-schema.org/understanding-json-schema/reference/numeric.html#number](https://json-schema.org/understanding-json-schema/reference/numeric.html#number)

Type
https

property INTEGER

//json-schema.org/understanding-json-schema/reference/numeric.html#integer

Type
https

class kwcoco.util.jsonschema_elements.QuantifierElements

Bases: object

Quantifier types

https://json-schema.org/understanding-json-schema/reference/combing.html#allof

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> elem.ANYOF(elem.STRING, elem.NUMBER).validate()
>>> elem.ONEOF(elem.STRING, elem.NUMBER).validate()
>>> elem.NOT(elem.NULL).validate()
>>> elem.NOT(elem.ANY).validate()
>>> elem.ANY.validate()
```

property ANY

ALLOF(*TYPES)

ANYOF(*TYPES)

ONEOF(*TYPES)

NOT(TYPE)

class kwcoco.util.jsonschema_elements.ContainerElements

Bases: object

Types that contain other types

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> print(elem.ARRAY().validate())
>>> print(elem.OBJECT().validate())
>>> print(elem.OBJECT().validate())
{'type': 'array', 'items': []}
{'type': 'object', 'properties': {}}
{'type': 'object', 'properties': {}}
```

ARRAY(TYPE={}, **kw)

https://json-schema.org/understanding-json-schema/reference/array.html

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> ARRAY(numItems=3)
>>> schema = ARRAY(minItems=3)
>>> schema.validate()
{'type': 'array', 'items': {}, 'minItems': 3}
```

OBJECT(*PROPERTIES*={}, ***kw*)

<https://json-schema.org/understanding-json-schema/reference/object.html>

Example

```
>>> import jsonschema
>>> schema = elem.OBJECT()
>>> jsonschema.validate({}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.ANY(),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'])
>>> jsonschema.validate({'key1': None}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.OBJECT({'arr': elem.ARRAY()}),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'], title='a title')
>>> schema.validate()
>>> print('schema = {}'.format(ub.urepr(schema, sort=1, nl=-1)))
>>> jsonschema.validate({'key1': {'arr': []}}, schema)
schema = {
    'properties': {
        'key1': {
            'properties': {
                'arr': {'items': {}, 'type': 'array'}
            },
            'type': 'object'
        },
        'key2': {}
    },
    'required': ['key1'],
    'title': 'a title',
    'type': 'object'
}
```

class kwcoco.util.jsonschema_elements.SchemaElements

Bases: *ScalarElements*, *QuantifierElements*, *ContainerElements*

Functional interface into defining jsonschema structures.

See mixin classes for details.

References

<https://json-schema.org/understanding-json-schema/>

Todo:

- [] Generics: title, description, default, examples
-

CommandLine

```
xdoctest -m /home/joncrall/code/kwcoco/kwcoco/util/jsonschema_elements.py
↳ SchemaElements
```

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> elem = SchemaElements()
>>> elem.ARRAY(elem.ANY())
>>> schema = OBJECT({
>>>     'prop1': ARRAY(INTEGER, minItems=3),
>>>     'prop2': ARRAY(STRING, numItems=2),
>>>     'prop3': ARRAY(OBJECT({
>>>         'subprob1': NUMBER,
>>>         'subprob2': NUMBER,
>>>     })),
>>> })
>>> print('schema = {}'.format(ub.urepr(schema, nl=2, sort=1)))
schema = {
    'properties': {
        'prop1': {'items': {'type': 'integer'}, 'minItems': 3, 'type': 'array'},
        'prop2': {'items': {'type': 'string'}, 'maxItems': 2, 'minItems': 2, 'type':
↳ ': 'array'},
        'prop3': {'items': {'properties': {'subprob1': {'type': 'number'}, 'subprob2':
↳ ': {'type': 'number'}}}, 'type': 'object'}, 'type': 'array'},
    },
    'type': 'object',
}
```

```
>>> TYPE = elem.OBJECT({
>>>     'p1': ANY,
>>>     'p2': ANY,
>>> }, required=['p1'])
>>> import jsonschema
>>> inst = {'p1': None}
>>> jsonschema.validate(inst, schema=TYPE)
>>> #jsonschema.validate({'p2': None}, schema=TYPE)
```

`kwcocoo.util.jsonschema_elements.ALLOF(*TYPES)`

`kwcocoo.util.jsonschema_elements.ANYOF(*TYPES)`

`kwococo.util.jsonschema_elements.ARRAY(TYPE={}, **kw)`
<https://json-schema.org/understanding-json-schema/reference/array.html>

Example

```
>>> from kwococo.util.jsonschema_elements import * # NOQA
>>> ARRAY(numItems=3)
>>> schema = ARRAY(minItems=3)
>>> schema.validate()
{'type': 'array', 'items': {}, 'minItems': 3}
```

`kwococo.util.jsonschema_elements.NOT(TYPE)`
`kwococo.util.jsonschema_elements.OBJECT(PROPERTIES={}, **kw)`
<https://json-schema.org/understanding-json-schema/reference/object.html>

Example

```
>>> import jsonschema
>>> schema = elem.OBJECT()
>>> jsonschema.validate({}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.ANY(),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'])
>>> jsonschema.validate({'key1': None}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.OBJECT({'arr': elem.ARRAY()}),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'], title='a title')
>>> schema.validate()
>>> print('schema = {}'.format(ub.urepr(schema, sort=1, nl=-1)))
>>> jsonschema.validate({'key1': {'arr': []}}, schema)
schema = {
    'properties': {
        'key1': {
            'properties': {
                'arr': {'items': {}, 'type': 'array'}
            },
            'type': 'object'
        },
        'key2': {}
    },
    'required': ['key1'],
    'title': 'a title',
    'type': 'object'
}
```

kwcoco.util.jsonschema_elements.ONEOF(*TYPES)

2.1.1.6.2.4 kwcoco.util.lazy_frame_backends module

Ported to delayed_image

2.1.1.6.2.5 kwcoco.util.util_archive module

```
class kwcoco.util.util_archive.Archive(fpayload=None, mode='r', backend=None, file=None)
Bases: object
```

Abstraction over zipfile and tarfile

Todo: see if we can use one of these other tools instead

SeeAlso:

<https://github.com/RKrahl/archive-tools> <https://pypi.org/project/arlib/>

Example

```
>>> from kwcoco.util.util_archive import Archive
>>> import ubelt as ub
>>> dpath = ub.Path.appdir('kwcoco', 'tests', 'util', 'archive')
>>> dpath.delete().ensuredir()
>>> # Test write mode
>>> mode = 'w'
>>> arc_zip = Archive(str(dpath / 'demo.zip'), mode=mode)
>>> arc_tar = Archive(str(dpath / 'demo.tar.gz'), mode=mode)
>>> open(dpath / 'data_1only.txt', 'w').write('bazbzzz')
>>> open(dpath / 'data_2only.txt', 'w').write('buzzz')
>>> open(dpath / 'data_both.txt', 'w').write('foobar')
>>> #
>>> arc_zip.add(dpath / 'data_both.txt')
>>> arc_zip.add(dpath / 'data_1only.txt')
>>> #
>>> arc_tar.add(dpath / 'data_both.txt')
>>> arc_tar.add(dpath / 'data_2only.txt')
>>> #
>>> arc_zip.close()
>>> arc_tar.close()
>>> #
>>> # Test read mode
>>> arc_zip = Archive(str(dpath / 'demo.zip'), mode='r')
>>> arc_tar = Archive(str(dpath / 'demo.tar.gz'), mode='r')
>>> # Test names
>>> name = 'data_both.txt'
>>> assert name in arc_zip.names()
>>> assert name in arc_tar.names()
>>> # Test read
```

(continues on next page)

(continued from previous page)

```
>>> assert arc_zip.read(name, mode='r') == 'foobar'
>>> assert arc_tar.read(name, mode='r') == 'foobar'
>>> #
>>> # Test extractall
>>> extract_dpath = ub.ensuredir(str(dpath / 'extracted'))
>>> extracted1 = arc_zip.extractall(extract_dpath)
>>> extracted2 = arc_tar.extractall(extract_dpath)
>>> for fpath in extracted2:
>>>     print(open(fpath, 'r').read())
>>> for fpath in extracted1:
>>>     print(open(fpath, 'r').read())
```

Parameters

- **fpath** (*str | None*) – path to open
- **mode** (*str*) – either r or w
- **backend** (*str | ModuleType | None*) – either tarfile, zipfile string or module.
- **file** (*tarfile.TarFile | zipfile.ZipFile | None*) – the open backend file if it already exists. If not set, than fpath will open it.

```
_available_backends = {'tarfile': <module 'tarfile' from
'/home/docs/.asdf/install/python/3.11.4/lib/python3.11/tarfile.py'>, 'zipfile':
<module 'zipfile' from
'/home/docs/.asdf/install/python/3.11.4/lib/python3.11/zipfile.py'>}

@classmethod _open(fpath, mode, backend=None)

names()

read(name, mode='rb')
```

Read data directly out of the archive.

Parameters

- **name** (*str*) – the name of the archive member to read
- **mode** (*str*) – This is a conceptual parameter that emulates the usual open mode. Defaults to “rb”, which returns data as raw bytes. If “r” will decode the bytes into utf8-text.

```
@classmethod coerce(data)
```

Either open an archive file path or coerce an existing ZipFile or tarfile structure into this wrapper class

```
add(fpath, arcname=None)
```

```
close()
```

```
extractall(output_dpath='.', verbose=1, overwrite=True)
```

```
kwcoco.util.util_archive.unarchive_file(archive_fpath, output_dpath='.', verbose=1, overwrite=True)
```

```
kwcoco.util.util_archive._available_zipfile_compressions()
```

```
kwcoco.util.util_archive._coerce_zipfile_compression(compression)
```

2.1.1.6.2.6 kwcoco.util.util_deprecate module

Deprecation helpers

```
kwcoco.util.util_deprecate.deprecated_function_alias(modname, old_name, new_func,  
deprecate=None, error=None, remove=None)
```

Exposes an old deprecated alias of a new preferred function

2.1.1.6.2.7 kwcoco.util.util_eval module

Defines a safer eval function

```
exception kwcoco.util.util_eval.RestrictedSyntaxError
```

Bases: `Exception`

An exception raised by restricted_eval if a disallowed expression is given

```
kwcoco.util.util_eval.restricted_eval(expr, max_chars=32, local_dict=None, builtins_passlist=None)
```

A restricted form of Python's eval that is meant to be slightly safer

Parameters

- **expr** (*str*) – the expression to evaluate
- **max_char** (*int*) – expression cannot be more than this many characters
- **local_dict** (*Dict[str, Any]*) – a list of variables allowed to be used
- **builtins_passlist** (*List[str] | None*) – if specified, only allow use of certain builtins

References

<https://realpython.com/python-eval-function/#minimizing-the-security-issues-of-eval>

Notes

This function may not be safe, but it has as many mitigation measures that I know about. This function should be audited and possibly made even more restricted. The idea is that this should just be used to evaluate numeric expressions.

Example

```
>>> from kwcoco.util.util_eval import * # NOQA  
>>> builtins_passlist = ['min', 'max', 'round', 'sum']  
>>> local_dict = {}  
>>> max_chars = 32  
>>> expr = 'max(3 + 2, 9)'  
>>> result = restricted_eval(expr, max_chars, local_dict, builtins_passlist)  
>>> expr = '3 + 2'  
>>> result = restricted_eval(expr, max_chars, local_dict, builtins_passlist)  
>>> expr = '3 + 2'  
>>> result = restricted_eval(expr, max_chars)  
>>> import pytest
```

(continues on next page)

(continued from previous page)

```
>>> with pytest.raises(RestrictedSyntaxError):
>>>     expr = 'max(a + 2, 3)'
>>>     result = restricted_eval(expr, max_chars, dict(a=3))
```

2.1.1.6.2.8 kwcoco.util.util_futures module

Deprecated and functionality moved to ubelt

`class kwcoco.util.util_futures.Executor(mode='thread', max_workers=0)`

Bases: `object`

A concrete asynchronous executor with a configurable backend.

The type of parallelism (or lack thereof) is configured via the `mode` parameter, which can be: “process”, “thread”, or “serial”. This allows the user to easily enable / disable parallelism or switch between processes and threads without modifying the surrounding logic.

SeeAlso:

- `concurrent.futures.ThreadPoolExecutor`
- `concurrent.futures.ProcessPoolExecutor`
- `SerialExecutor`
- `JobPool`

Variables

`backend(SerialExecutor | ThreadPoolExecutor | ProcessPoolExecutor) –`

Example

```
>>> import ubelt as ub
>>> # Prototype code using simple serial processing
>>> executor = ub.Executor(mode='serial', max_workers=0)
>>> jobs = [executor.submit(sum, [i + 1, i]) for i in range(10)]
>>> print([job.result() for job in jobs])
[1, 3, 5, 7, 9, 11, 13, 15, 17, 19]
```

```
>>> # Enable parallelism by only changing one parameter
>>> executor = ub.Executor(mode='process', max_workers=0)
>>> jobs = [executor.submit(sum, [i + 1, i]) for i in range(10)]
>>> print([job.result() for job in jobs])
[1, 3, 5, 7, 9, 11, 13, 15, 17, 19]
```

Parameters

- **mode (str)** – The backend parallelism mechanism. Can be either thread, serial, or process. Defaults to ‘thread’.
- **max_workers (int)** – number of workers. If 0, serial is forced. Defaults to 0.

submit(func, *args, **kw)

Calls the submit function of the underlying backend.

Returns

a future representing the job

Return type

concurrent.futures.Future

shutdown()

Calls the shutdown function of the underlying backend.

map(fn, *iterables, **kwargs)

Calls the map function of the underlying backend.

CommandLine

```
xdoctest -m ubelt.util_futures Executor.map
```

Example

```
>>> import ubelt as ub
>>> import concurrent.futures
>>> import string
>>> with ub.Executor(mode='serial') as executor:
...     result_iter = executor.map(int, string.digits)
...     results = list(result_iter)
>>> print('results = {!r}'.format(results))
results = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
>>> with ub.Executor(mode='thread', max_workers=2) as executor:
...     result_iter = executor.map(int, string.digits)
...     results = list(result_iter)
>>> # xdoctest: +IGNORE_WANT
>>> print('results = {!r}'.format(results))
results = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
```

class kwcoc.util.util_futures.JobPool(mode='thread', max_workers=0, transient=False)

Bases: `object`

Abstracts away boilerplate of submitting and collecting jobs

This is a basic wrapper around `ubelt.util_futures.Executor` that simplifies the most basic case by 1. keeping track of references to submitted futures for you and 2. providing an `as_completed` method to consume those futures as they are ready.

Variables

- **executor** (`Executor`) – internal executor object
- **jobs** (`List[Future]`) – internal job list. Note: do not rely on this attribute, it may change in the future.

Example

```
>>> import ubelt as ub
>>> def worker(data):
>>>     return data + 1
>>> pool = ub.JobPool('thread', max_workers=16)
>>> for data in ub.ProgIter(range(10), desc='submit jobs'):
>>>     pool.submit(worker, data)
>>> final = []
>>> for job in pool.as_completed(desc='collect jobs'):
>>>     info = job.result()
>>>     final.append(info)
>>> print('final = {!r}'.format(final))
```

Parameters

- **mode** (*str*) – The backend parallelism mechanism. Can be either thread, serial, or process. Defaults to ‘thread’.
- **max_workers** (*int*) – number of workers. If 0, serial is forced. Defaults to 0.
- **transient** (*bool*) – if True, references to jobs will be discarded as they are returned by `as_completed()`. Otherwise the `jobs` attribute holds a reference to all jobs ever submitted. Default to False.

`submit(func, *args, **kwargs)`

Submit a job managed by the pool

Parameters

- **func** (*Callable[..., Any]*) – A callable that will take as many arguments as there are passed iterables.
- ***args** – positional arguments to pass to the function
- ***kwargs** – keyword arguments to pass to the function

Returns

a future representing the job

Return type

`concurrent.futures.Future`

`shutdown()`

`_clear_completed()`

`as_completed(timeout=None, desc=None, progkw=None)`

Generates completed jobs in an arbitrary order

Parameters

- **timeout** (*float | None*) – Specify the the maximum number of seconds to wait for a job. Note: this is ignored in serial mode.
- **desc** (*str | None*) – if specified, reports progress with a `ubelt.progiter.ProgIter` object.
- **progkw** (*dict | None*) – extra keyword arguments to `ubelt.progiter.ProgIter`.

Yields

concurrent.futures.Future – The completed future object containing the results of a job.

CommandLine

```
xdoctest -m ubelt.util_futures JobPool.as_completed
```

Example

```
>>> import ubelt as ub
>>> pool = ub.JobPool('thread', max_workers=8)
>>> text = ub.paragraph(
...     """
...     UDP is a cool protocol, check out the wiki:
...
...     UDP-based Data Transfer Protocol (UDT), is a high-performance
...     data transfer protocol designed for transferring large
...     volumetric datasets over high-speed wide area networks. Such
...     settings are typically disadvantageous for the more common TCP
...     protocol.
...     """)
>>> for word in text.split(' '):
...     pool.submit(print, word)
>>> for _ in pool.as_completed():
...     pass
>>> pool.shutdown()
```

join(kwargs)**

Like *JobPool.as_completed()*, but executes the *result* method of each future and returns only after all processes are complete. This allows for lower-boilerplate prototyping.

Parameters

****kwargs** – passed to *JobPool.as_completed()*

Returns

list of results

Return type

List[Any]

Example

```
>>> import ubelt as ub
>>> # We just want to try replacing our simple iterative algorithm
>>> # with the embarrassingly parallel version
>>> arglist = list(zip(range(1000), range(1000)))
>>> func = ub.identity
>>> #
>>> # Original version
>>> for args in arglist:
...     func(*args)
```

(continues on next page)

(continued from previous page)

```
>>> #
>>> # Potentially parallel version
>>> jobs = ub.JobPool(max_workers=0)
>>> for args in arglist:
>>>     jobs.submit(func, *args)
>>> _ = jobs.join(desc='running')
```

2.1.1.6.2.9 kwcoco.util.util_json module

`kwcoco.util.util_json.ensure_json_serializable(dict_, normalize_containers=False, verbose=0)`

Attempt to convert common types (e.g. numpy) into something json compliant

Convert numpy and tuples into lists

Parameters

- `normalize_containers (bool)` – if True, normalizes dict containers to be standard python structures. Defaults to False.

Example

```
>>> data = ub.ddict(lambda: int)
>>> data['foo'] = ub.ddict(lambda: int)
>>> data['bar'] = np.array([1, 2, 3])
>>> data['foo']['a'] = 1
>>> data['foo']['b'] = (1, np.array([1, 2, 3]), {3: np.int32(3), 4: np.float16(1.0)})
>>>
>>> dict_ = data
>>> print(ub.urepr(data, nl=-1))
>>> assert list(find_json_unserializable(data))
>>> result = ensure_json_serializable(data, normalize_containers=True)
>>> print(ub.urepr(result, nl=-1))
>>> assert not list(find_json_unserializable(result))
>>> assert type(result) is dict
```

`kwcoco.util.util_json.find_json_unserializable(data, quickcheck=False)`

Recurse through json datastructure and find any component that causes a serialization error. Record the location of these errors in the datastructure as we recurse through the call tree.

Parameters

- `data (object)` – data that should be json serializable
- `quickcheck (bool)` – if True, check the entire datastructure assuming its ok before doing the python-based recursive logic.

Returns

list of “bad part” dictionaries containing items

’value’ - the value that caused the serialization error

’loc’ - which contains a list of key/indexes that can be used to lookup the location of the unserializable value. If the “loc” is a list, then it indicates a rare case where a key in a dictionary is causing the serialization error.

Return type

List[Dict]

Example

```
>>> from kwcoc.util.util_json import * # NOQA
>>> part = ub.ddict(lambda: int)
>>> part['foo'] = ub.ddict(lambda: int)
>>> part['bar'] = np.array([1, 2, 3])
>>> part['foo']['a'] = 1
>>> # Create a dictionary with two unserializable parts
>>> data = [1, 2, {'nest1': [2, part]}, {frozenset({'badkey'}): 3, 2: 4}]
>>> parts = list(find_json_unserializable(data))
>>> print('parts = {}'.format(ub.urepr(parts, nl=1)))
>>> # Check expected structure of bad parts
>>> assert len(parts) == 2
>>> part = parts[1]
>>> assert list(part['loc']) == [2, 'nest1', 1, 'bar']
>>> # We can use the "loc" to find the bad value
>>> for part in parts:
>>>     # "loc" is a list of directions containing which keys/indexes
>>>     # to traverse at each descent into the data structure.
>>>     directions = part['loc']
>>>     curr = data
>>>     special_flag = False
>>>     for key in directions:
>>>         if isinstance(key, list):
>>>             # special case for bad keys
>>>             special_flag = True
>>>             break
>>>         else:
>>>             # normal case for bad values
>>>             curr = curr[key]
>>>     if special_flag:
>>>         assert part['data'] in curr.keys()
>>>         assert part['data'] is key[1]
>>>     else:
>>>         assert part['data'] is curr
```

kwcoc.util.util_json.indexable_allclose(dct1, dct2, return_info=False)

Walks through two nested data structures and ensures that everything is roughly the same.

Note: Use the version in ubelt instead

Parameters

- **dct1** – a nested indexable item
- **dct2** – a nested indexable item

Example

```
>>> from kwcoco.util.util_json import indexable_allclose
>>> dct1 = {
>>>     'foo': [1.222222, 1.333],
>>>     'bar': 1,
>>>     'baz': [],
>>> }
>>> dct2 = {
>>>     'foo': [1.22222, 1.333],
>>>     'bar': 1,
>>>     'baz': [],
>>> }
>>> assert indexable_allclose(dct1, dct2)
```

`kwcoco.util.util_json.coerce_indent(indent)`

Example**2.1.1.6.2.10 kwcoco.util.util_monkey module**

`class kwcoco.util.util_monkey.SuppressPrint(*mods, **kw)`
Bases: `object`

Temporarily replace the print function in a module with a noop

Parameters

- `*mods` – the modules to disable print in
- `**kw` – only accepts “enabled” enabled (bool, default=True): enables or disables this context

`class kwcoco.util.util_monkey.Reloadable`

Bases: `type`

This is a metaclass that overrides the behavior of `isinstance` and `issubclass` when invoked on classes derived from this such that they only check that the module and class names agree, which are preserved through module reloads, whereas class instances are not.

This is useful for interactive development, but should be removed in production.

Example

```
>>> from kwcoco.util.util_monkey import * # NOQA
>>> # Illustrate what happens with a reload when using this utility
>>> # versus without it.
>>> class Base1:
>>> ...
>>> class Derived1(Base1):
>>> ...
>>> @Reloadable.add_metaclass
>>> class Base2:
>>> ...
>>> class Derived2(Base2):
```

(continues on next page)

(continued from previous page)

```
>>>     ...
>>> inst1 = Derived1()
>>> inst2 = Derived2()
>>> assert isinstance(inst1, Derived1)
>>> assert isinstance(inst2, Derived2)
>>> # Simulate reload
>>> class Base1:
>>>     ...
>>> class Derived1(Base1):
>>>     ...
>>> @Reloadable.add_metaclass
>>> class Base2:
>>>     ...
>>> class Derived2(Base2):
>>>     ...
>>> assert not isinstance(inst1, Derived1)
>>> assert isinstance(inst2, Derived2)
```

classmethod add_metaclass(cls)

Class decorator for creating a class with this as a metaclass

classmethod developing(cls)

Like add_metaclass, but warns the user that they are developing. This helps remind them to remove this in production

2.1.1.6.2.11 kwcoc.util.util_parallel module

kwcoc.util.util_parallel.coerce_num_workers(num_workers='auto', minimum=0)

Return some number of CPUs based on a chosen hueristic

Parameters

- **num_workers** (*int | str*) – A special string code, or an exact number of cpus
- **minimum** (*int*) – minimum workers we are allowed to return

Returns

number of available cpus based on request parameters

Return type

int

CommandLine

```
xdoctest -m kwcoc.util.util_parallel coerce_num_workers
```

Example

```
>>> from kwcoco.util.util_parallel import * # NOQA
>>> print(coerce_num_workers('all'))
>>> print(coerce_num_workers('avail'))
>>> print(coerce_num_workers('auto'))
>>> print(coerce_num_workers('all-2'))
>>> print(coerce_num_workers('avail-2'))
>>> print(coerce_num_workers('all/2'))
>>> print(coerce_num_workers('min(all,2)'))
>>> print(coerce_num_workers('max(all,2)[0]'))
>>> import pytest
>>> with pytest.raises(Exception):
>>>     print(coerce_num_workers('all + 1' + (' + 1' * 100)))
>>> total_cpus = coerce_num_workers('all')
>>> assert coerce_num_workers('all-2') == max(total_cpus - 2, 0)
>>> assert coerce_num_workers('all-100') == max(total_cpus - 100, 0)
>>> assert coerce_num_workers('avail') <= coerce_num_workers('all')
>>> assert coerce_num_workers(3) == max(3, 0)
```

2.1.1.6.2.12 kwcoco.util.util_reroot module

Reroooting is harder than you would think

`kwcoco.util.util_reroot.special_reroot_single(dset, verbose=0)`

`kwcoco.util.util_reroot.resolve_relative_to(path, dpath, strict=False)`

Given a path, try to resolve its symlinks such that it is relative to the given dpath.

Example

```
>>> from kwcoco.util.util_reroot import * # NOQA
>>> import os
>>> def _symlink(self, target, verbose=0):
>>>     return ub.Path(ub.symlink(target, self, verbose=verbose))
>>> ub.Path._symlink = _symlink
>>> #
>>> # TODO: try to enumerate all basic cases
>>> #
>>> base = ub.Path.apendir('kwcoco/tests/reroot')
>>> base.delete().ensuredir()
>>> #
>>> drive1 = (base / 'drive1').ensuredir()
>>> drive2 = (base / 'drive2').ensuredir()
>>> #
>>> data_repo1 = (drive1 / 'data_repo1').ensuredir()
>>> cache = (data_repo1 / '.cache').ensuredir()
>>> real_file1 = (cache / 'real_file1').touch()
>>> #
>>> real_bundle = (data_repo1 / 'real_bundle').ensuredir()
>>> real_assets = (real_bundle / 'assets').ensuredir()
```

(continues on next page)

(continued from previous page)

```
>>> #
>>> # Symlink file outside of the bundle
>>> link_file1 = (real_assets / 'link_file1')._symlink(real_file1)
>>> real_file2 = (real_assets / 'real_file2').touch()
>>> link_file2 = (real_assets / 'link_file2')._symlink(real_file2)
>>> #
>>> #
>>> # A symlink to the data repo
>>> data_repo2 = (drive1 / 'data_repo2')._symlink(data_repo1)
>>> data_repo3 = (drive2 / 'data_repo3')._symlink(data_repo1)
>>> data_repo4 = (drive2 / 'data_repo4')._symlink(data_repo2)
>>> #
>>> # A prediction repo TODO
>>> pred_repo5 = (drive2 / 'pred_repo5').ensuredir()
>>> #
>>> # _ = ub.cmd(f'tree -a {base}', verbose=3)
>>> #
>>> fpaths = []
>>> for r, ds, fs in os.walk(base, followlinks=True):
>>>     for f in fs:
>>>         if 'file' in f:
>>>             fpath = ub.Path(r) / f
>>>             fpaths.append(fpath)
>>> #
>>> #
>>> dpath = real_bundle.resolve()
>>> #
>>> for path in fpaths:
>>>     # print(f'{path}')
>>>     # print(f'{path.resolve()=}')
>>>     resolved_rel = resolve_relative_to(path, dpath)
>>>     print('resolved_rel = {!r}'.format(resolved_rel))
```

kwcoc.util.util_reroot.resolve_directory_symlinks(path)

Only resolve symlinks of directories, not the base file

2.1.1.6.2.13 kwcoc.util.util_sklearn module

Extensions to sklearn constructs

class kwcoc.util.util_sklearn.StratifiedGroupKFold(*n_splits*=3, *shuffle*=False, *random_state*=None)

Bases: _BaseKFold

Stratified K-Folds cross-validator with Grouping

Provides train/test indices to split data in train/test sets.

This cross-validation object is a variation of GroupKFold that returns stratified folds. The folds are made by preserving the percentage of samples for each class.

This is an old interface and should likely be refactored and modernized.

Parameters

n_splits (*int*, *default*=3) – Number of folds. Must be at least 2.

`_make_test_folds(X, y=None, groups=None)`

Parameters

- `X (ndarray)` – data
- `y (ndarray)` – labels
- `groups (ndarray)` – groupids for items. Items with the same groupid must be placed in the same group.

Returns

`test_folds`

Return type

`list`

Example

```
>>> from kwcoco.util.util_sklearn import * # NOQA
>>> import kwarray
>>> rng = kwarray.ensure_rng(0)
>>> groups = [1, 1, 3, 4, 2, 2, 7, 8, 8]
>>> y      = [1, 1, 1, 2, 2, 2, 3, 3]
>>> X = np.empty((len(y), 0))
>>> self = StratifiedGroupKFold(random_state=rng, shuffle=True)
>>> skf_list = list(self.split(X=X, y=y, groups=groups))
>>> import ubelt as ub
>>> print(ub.repr(skf_list, nl=1, with_dtype=False))
[
    (np.array([2, 3, 4, 5, 6]), np.array([0, 1, 7, 8])),
    (np.array([0, 1, 2, 7, 8]), np.array([3, 4, 5, 6])),
    (np.array([0, 1, 3, 4, 5, 6, 7, 8]), np.array([2])),
]
```

`_iter_test_masks(X, y=None, groups=None)`

`split(X, y, groups=None)`

Generate indices to split data into training and test set.

`_abc_impl = <_abc._abc_data object>`

2.1.1.6.2.14 kwcoco.util.util_special_json module

Special non-general json functions

`kwcoco.util.util_special_json._json_dumps(data, indent=None)`

`kwcoco.util.util_special_json._json_lines_dumps(key, value, indent)`

`kwcoco.util.util_special_json._special_kwcooco_pretty_dumps_orig(data, indent=None)`

The old way of doing “pretty” dumping, except it isn’t that pretty.

See also:

Tried to do a “principled” lark version, but this way is faster
`~/code/kwcoco/dev/devcheck/json.dumps_experiments.py`

2.1.1.6.2.15 kwcoco.util.util_truncate module

Truncate utility based on python-slugify.

<https://pypi.org/project/python-slugify/1.2.2/>

`kwcoco.util.util_truncate._trunc_op(string, max_length, trunc_loc, trunc_char='~')`

Example

```
>>> from kwcoco.util.util_truncate import _trunc_op
>>> string =
... 'DarnOvercastSculptureTipperBlazerConcaveUnsuitedDerangedHexagonRockband'
>>> max_length = 16
>>> trunc_loc = 0.5
>>> _trunc_op(string, max_length, trunc_loc)
```

```
>>> from kwcoco.util.util_truncate import _trunc_op
>>> max_length = 16
>>> string = 'a' * 16
>>> _trunc_op(string, max_length, trunc_loc)
```

```
>>> string = 'a' * 17
>>> _trunc_op(string, max_length, trunc_loc)
```

`kwcoco.util.util_truncate.smart_truncate(string, max_length=0, separator=' ', trunc_loc=0.5, trunc_char='~')`

Truncate a string. :param string (str): string for modification :param max_length (int): output string length :param word_boundary (bool): :param save_order (bool): if True then word order of output string is like input string :param separator (str): separator between words :param trunc_loc (float): fraction of location where to remove the text

trunc_char (str): the character to denote where truncation is starting

Returns

2.1.1.6.2.16 kwcoco.util.util_windows module

`kwcoco.util.util_windows.fix_msys_path(path)`

Windows is so special. When using msys bash if you pass a path on the CLI it resolves /c to C:/, but if you have your path as part of a config string, it doesn't know how to do that, and at that point Python doesn't handle the msys style /c paths. This is a hack detects and fixes this in this location.

Example

```
>>> print(fix_msy_path('/c/Users/foobar'))
C:/Users/foobar
>>> print(fix_msy_path(r'\c\Users\foobar'))
C:/Users\foobar
>>> print(fix_msy_path(r'\d\Users\foobar'))
D:/Users\foobar
>>> print(fix_msy_path(r'\z'))
Z:/
>>> import pathlib
>>> assert fix_msy_path(pathlib.Path(r'\z')) == pathlib.Path('Z:/')
```

`kwcoco.util.util_windows.is_windows_path(path)`

Example

```
>>> assert is_windows_path('C:')
>>> assert is_windows_path('C:/')
>>> assert is_windows_path('C:\\')
>>> assert is_windows_path('C:/foo')
>>> assert is_windows_path('C:\\foo')
>>> assert not is_windows_path('/foo')
```

2.1.1.6.3 Module contents

`mkinit ~/code/kwcoco/kwcoco/util/__init__.py -w` `mkinit ~/code/kwcoco/kwcoco/util/__init__.py -lazy`
`kwcoco.util.ALLOF(*TYPES)`
`kwcoco.util.ANYOF(*TYPES)`
`kwcoco.util.ARRAY(TYPE={}, **kw)`
<https://json-schema.org/understanding-json-schema/reference/array.html>

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> ARRAY(numItems=3)
>>> schema = ARRAY(minItems=3)
>>> schema.validate()
{'type': 'array', 'items': {}, 'minItems': 3}
```

`class kwcoco.util.Archive(fp=path=None, mode='r', backend=None, file=None)`

Bases: `object`

Abstraction over zipfile and tarfile

Todo: see if we can use one of these other tools instead

SeeAlso:

<https://github.com/RKrahl/archive-tools> <https://pypi.org/project/arlib/>

Example

```
>>> from kwcoc.util.util_archive import Archive
>>> import ubelt as ub
>>> dpath = ub.Path.append('kwcoc', 'tests', 'util', 'archive')
>>> dpath.delete().ensuredir()
>>> # Test write mode
>>> mode = 'w'
>>> arc_zip = Archive(str(dpath / 'demo.zip'), mode=mode)
>>> arc_tar = Archive(str(dpath / 'demo.tar.gz'), mode=mode)
>>> open(dpath / 'data_1only.txt', 'w').write('bazbzzz')
>>> open(dpath / 'data_2only.txt', 'w').write('buzzz')
>>> open(dpath / 'data_both.txt', 'w').write('foobar')
>>> #
>>> arc_zip.add(dpath / 'data_both.txt')
>>> arc_zip.add(dpath / 'data_1only.txt')
>>> #
>>> arc_tar.add(dpath / 'data_both.txt')
>>> arc_tar.add(dpath / 'data_2only.txt')
>>> #
>>> arc_zip.close()
>>> arc_tar.close()
>>> #
>>> # Test read mode
>>> arc_zip = Archive(str(dpath / 'demo.zip'), mode='r')
>>> arc_tar = Archive(str(dpath / 'demo.tar.gz'), mode='r')
>>> # Test names
>>> name = 'data_both.txt'
>>> assert name in arc_zip.names()
>>> assert name in arc_tar.names()
>>> # Test read
>>> assert arc_zip.read(name, mode='r') == 'foobar'
>>> assert arc_tar.read(name, mode='r') == 'foobar'
>>> #
>>> # Test extractall
>>> extract_dpath = ub.ensuredir(str(dpath / 'extracted'))
>>> extracted1 = arc_zip.extractall(extract_dpath)
>>> extracted2 = arc_tar.extractall(extract_dpath)
>>> for fpath in extracted2:
>>>     print(open(fpath, 'r').read())
>>> for fpath in extracted1:
>>>     print(open(fpath, 'r').read())
```

Parameters

- **fpath** (*str* | *None*) – path to open
- **mode** (*str*) – either r or w
- **backend** (*str* | *ModuleType* | *None*) – either tarfile, zipfile string or module.

- **file** (*tarfile.TarFile* | *zipfile.ZipFile* | *None*) – the open backend file if it already exists. If not set, than fpath will open it.

```
_available_backends = {'tarfile': <module 'tarfile' from
'/home/docs/.asdf/install/python/3.11.4/lib/python3.11/tarfile.py'>, 'zipfile':
<module 'zipfile' from
'/home/docs/.asdf/install/python/3.11.4/lib/python3.11/zipfile.py'>}
```

classmethod _open(*fpath*, *mode*, *backend=None*)

names()

read(*name*, *mode='rb'*)

Read data directly out of the archive.

Parameters

- **name** (*str*) – the name of the archive member to read
- **mode** (*str*) – This is a conceptual parameter that emulates the usual open mode. Defaults to “rb”, which returns data as raw bytes. If “r” will decode the bytes into utf8-text.

classmethod coerce(*data*)

Either open an archive file path or coerce an existing ZipFile or tarfile structure into this wrapper class

add(*fpath*, *arcname=None*)

close()

extractall(*output_dpath='.'*, *verbose=1*, *overwrite=True*)

class kwcoco.util.ContainerElements

Bases: *object*

Types that contain other types

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> print(elem.ARRAY().validate())
>>> print(elem.OBJECT().validate())
>>> print(elem.OBJECT().validate())
{'type': 'array', 'items': []}
{'type': 'object', 'properties': {}}
{'type': 'object', 'properties': {}}
```

ARRAY(*TYPE={}*, ***kw*)

<https://json-schema.org/understanding-json-schema/reference/array.html>

Example

```
>>> from kwococo.util.jsonschema_elements import * # NOQA
>>> ARRAY(numItems=3)
>>> schema = ARRAY(minItems=3)
>>> schema.validate()
{'type': 'array', 'items': {}, 'minItems': 3}
```

OBJECT(*PROPERTIES*={}, ***kw*)

<https://json-schema.org/understanding-json-schema/reference/object.html>

Example

```
>>> import jsonschema
>>> schema = elem.OBJECT()
>>> jsonschema.validate({}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.ANY(),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'])
>>> jsonschema.validate({'key1': None}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.OBJECT({'arr': elem.ARRAY()}),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'], title='a title')
>>> schema.validate()
>>> print('schema = {}'.format(ub.urepr(schema, sort=1, nl=-1)))
>>> jsonschema.validate({'key1': {'arr': []}}, schema)
schema = {
    'properties': {
        'key1': {
            'properties': {
                'arr': {'items': {}, 'type': 'array'}
            },
            'type': 'object'
        },
        'key2': {}
    },
    'required': ['key1'],
    'title': 'a title',
    'type': 'object'
}
```

class kwococo.util.DictLike

Bases: `NiceRepr`

An inherited class must specify the `getitem`, `setitem`, and
keys methods.

A class is dictionary like if it has:

`__iter__`, `__len__`, `__contains__`, `__getitem__`, `items`, `keys`, `values`, `get`,

and if it should be writable it should have: `__delitem__`, `__setitem__`, `update`,

And perhaps: `copy`,

`__iter__`, `__len__`, `__contains__`, `__getitem__`, `items`, `keys`, `values`, `get`,

and if it should be writable it should have: `__delitem__`, `__setitem__`, `update`,

And perhaps: `copy`,

getitem(key)

Parameters

`key (Any)` – a key

Returns

a value

Return type

`Any`

setitem(key, value)

Parameters

- `key (Any)`
- `value (Any)`

delitem(key)

Parameters

`key (Any)`

keys()

Yields

`Any` – a key

items()

Yields

`Tuple[Any, Any]` – a key value pair

values()

Yields

`Any` – a value

copy()

Return type

`Dict`

to_dict()

Return type

`Dict`

`asdict()`

Return type

Dict

`update(other)`

`get(key, default=None)`

Parameters

- `key` (`Any`)
- `default` (`Any`)

Return type

Any

`class kwcoc.util.Element(base, options={}, _magic=None)`

Bases: `dict`

A dictionary used to define an element of a JSON Schema.

The exact keys/values for the element will depend on the type of element being described. The *SchemaElements* defines exactly what these are for the core elements. (e.g. OBJECT, INTEGER, NULL, ARRAY, ANYOF)

Example

```
>>> from kwcoc.coco_schema import * # NOQA
>>> self = Element(base={'type': 'demo'}, options={'opt1', 'opt2'})
>>> new = self(opt1=3)
>>> print('self = {}'.format(ub.urepr(self, nl=1, sort=1)))
>>> print('new = {}'.format(ub.urepr(new, nl=1, sort=1)))
>>> print('new2 = {}'.format(ub.urepr(new(), nl=1, sort=1)))
>>> print('new3 = {}'.format(ub.urepr(new(title='myvar'), nl=1, sort=1)))
>>> print('new4 = {}'.format(ub.urepr(new(title='myvar')(examples=['']), nl=1, sort=1)))
>>> print('new5 = {}'.format(ub.urepr(new(badattr=True), nl=1, sort=1)))
self = {
    'type': 'demo',
}
new = {
    'opt1': 3,
    'type': 'demo',
}
new2 = {
    'opt1': 3,
    'type': 'demo',
}
new3 = {
    'opt1': 3,
    'title': 'myvar',
    'type': 'demo',
}
new4 = {
    'examples': [''],
}
```

(continues on next page)

(continued from previous page)

```
'opt1': 3,
'title': 'myvar',
'type': 'demo',
}
new5 = {
    'opt1': 3,
    'type': 'demo',
}
```

Parameters

- **base** (*dict*) – the keys / values this schema must contain
- **options** (*dict*) – the keys / values this schema may contain
- **_magic** (*callable* | *None*) – called when creating an instance of this schema element. Allows convinience attributes to be converted to the formal jsonschema specs. TODO: _magic is a terrible name, we need to rename it with something descriptive.

validate(*instance*=*NoParam*)

If *instance* is given, validates that that dictionary conforms to this schema. Otherwise validates that this is a valid schema element.

Parameters

instance (*dict*) – a dictionary to validate

```
class kwcocoo.util.IndexableWalker(data, dict_cls=(<class 'dict'>, ), list_cls=(<class 'list'>, <class 'tuple'>))
```

Bases: `Generator`

Traverses through a nested tree-like indexable structure.

Generates a path and value to each node in the structure. The path is a list of indexes which if applied in order will reach the value.

The `__setitem__` method can be used to modify a nested value based on the path returned by the generator.

When generating values, you can use “send” to prevent traversal of a particular branch.

RelatedWork:

- <https://pypi.org/project/python-benedict/> - implements a dictionary subclass with similar nested indexing abilities.

Variables

- **data** (*dict* | *list* | *tuple*) – the wrapped indexable data
- **dict_cls** (*Tuple*[*type*]) – the types that should be considered dictionary mappings for the purpose of nested iteration. Defaults to *dict*.
- **list_cls** (*Tuple*[*type*]) – the types that should be considered list-like for the purposes of nested iteration. Defaults to (*list*, *tuple*).

Example

```
>>> import ubelt as ub
>>> # Given Nested Data
>>> data = {
>>>     'foo': {'bar': 1},
>>>     'baz': [{ 'biz': 3}, { 'buz': [4, 5, 6]}],
>>> }
>>> # Create an IndexableWalker
>>> walker = ub.IndexableWalker(data)
>>> # We iterate over the data as if it was flat
>>> # ignore the <want> string due to order issues on older Pythons
>>> # xdoctest: +IGNORE_WANT
>>> for path, val in walker:
>>>     print(path)
['foo']
['baz']
['baz', 0]
['baz', 1]
['baz', 1, 'buz']
['baz', 1, 'buz', 0]
['baz', 1, 'buz', 1]
['baz', 1, 'buz', 2]
['baz', 0, 'biz']
['foo', 'bar']
>>> # We can use "paths" as keys to getitem into the walker
>>> path = ['baz', 1, 'buz', 2]
>>> val = walker[path]
>>> assert val == 6
>>> # We can use "paths" as keys to setitem into the walker
>>> assert data['baz'][1]['buz'][2] == 6
>>> walker[path] = 7
>>> assert data['baz'][1]['buz'][2] == 7
>>> # We can use "paths" as keys to delitem into the walker
>>> assert data['baz'][1]['buz'][1] == 5
>>> del walker[['baz', 1, 'buz', 1]]
>>> assert data['baz'][1]['buz'][1] == 7
```

Example

```
>>> # Create nested data
>>> # xdoctest: +REQUIRES(module:numpy)
>>> import numpy as np
>>> import ubelt as ub
>>> data = ub.ddict(lambda: int)
>>> data['foo'] = ub.ddict(lambda: int)
>>> data['bar'] = np.array([1, 2, 3])
>>> data['foo']['a'] = 1
>>> data['foo']['b'] = np.array([1, 2, 3])
>>> data['foo']['c'] = [1, 2, 3]
>>> data['baz'] = 3
```

(continues on next page)

(continued from previous page)

```
>>> print('data = {}'.format(ub.repr2(data, nl=True)))
>>> # We can walk through every node in the nested tree
>>> walker = ub.IndexableWalker(data)
>>> for path, value in walker:
>>>     print('walk path = {}'.format(ub.repr2(path, nl=0)))
>>>     if path[-1] == 'c':
>>>         # Use send to prevent traversing this branch
>>>         got = walker.send(False)
>>>         # We can modify the value based on the returned path
>>>         walker[path] = 'changed the value of c'
>>> print('data = {}'.format(ub.repr2(data, nl=True)))
>>> assert data['foo']['c'] == 'changed the value of c'
```

Example

```
>>> # Test sending false for every data item
>>> import ubelt as ub
>>> data = {1: [1, 2, 3], 2: [1, 2, 3]}
>>> walker = ub.IndexableWalker(data)
>>> # Sending false means you wont traverse any further on that path
>>> num_iters_v1 = 0
>>> for path, value in walker:
>>>     print('[v1] walk path = {}'.format(ub.repr2(path, nl=0)))
>>>     walker.send(False)
>>>     num_iters_v1 += 1
>>> num_iters_v2 = 0
>>> for path, value in walker:
>>>     # When we dont send false we walk all the way down
>>>     print('[v2] walk path = {}'.format(ub.repr2(path, nl=0)))
>>>     num_iters_v2 += 1
>>> assert num_iters_v1 == 2
>>> assert num_iters_v2 == 8
```

Example

```
>>> # Test numpy
>>> # xdoctest: +REQUIRES(CPython)
>>> # xdoctest: +REQUIRES(module:numpy)
>>> import ubelt as ub
>>> import numpy as np
>>> # By default we don't recurse into ndarrays because they
>>> # Are registered as an indexable class
>>> data = {2: np.array([1, 2, 3])}
>>> walker = ub.IndexableWalker(data)
>>> num_iters = 0
>>> for path, value in walker:
>>>     print('walk path = {}'.format(ub.repr2(path, nl=0)))
>>>     num_iters += 1
>>> assert num_iters == 1
```

(continues on next page)

(continued from previous page)

```
>>> # Currently to use top-level ndarrays, you need to extend what the
>>> # list class is. This API may change in the future to be easier
>>> # to work with.
>>> data = np.random.rand(3, 5)
>>> walker = ub.IndexableWalker(data, list_cls=(list, tuple, np.ndarray))
>>> num_iters = 0
>>> for path, value in walker:
>>>     print('walk path = {}'.format(ub.repr2(path, nl=0)))
>>>     num_iters += 1
>>> assert num_iters == 3 + 3 * 5
```

send(arg) → send 'arg' into generator,
return next yielded value or raise StopIteration.

throw(typ[, val[, tb]]) → raise exception in generator,
return next yielded value or raise StopIteration.

_walk(data=None, prefix=[])
Defines the underlying generator used by IndexableWalker

Yields

Tuple[List, Any] | None – path (List) - a “path” through the nested data structure
value (Any) - the value indexed by that “path”.

Can also yield None in the case that *send* is called on the generator.

allclose(other, rel_tol=1e-09, abs_tol=0.0, return_info=False)

Walks through this and another nested data structures and checks if everything is roughly the same.

Parameters

- **other** (*IndexableWalker* | *List* | *Dict*) – a nested indexable item to compare against.
- **rel_tol** (*float*) – maximum difference for being considered “close”, relative to the magnitude of the input values
- **abs_tol** (*float*) – maximum difference for being considered “close”, regardless of the magnitude of the input values
- **return_info** (*bool*, *default=False*) – if true, return extra info dict

Returns

A boolean result if *return_info* is false, otherwise a tuple of the boolean result and an “info” dict containing detailed results indicating what matched and what did not.

Return type

bool | *Tuple[bool, Dict]*

Example

```
>>> import ubelt as ub
>>> items1 = ub.IndexableWalker({
>>>     'foo': [1.222222, 1.333],
>>>     'bar': 1,
>>>     'baz': [],
>>> })
>>> items2 = ub.IndexableWalker({
>>>     'foo': [1.222222, 1.333],
>>>     'bar': 1,
>>>     'baz': [],
>>> })
>>> flag, return_info = items1.allclose(items2, return_info=True)
>>> print('return_info = {}'.format(ub.repr2(return_info, nl=1)))
>>> print('flag = {!r}'.format(flag))
>>> for p1, v1, v2 in return_info['faillist']:
>>>     v1_ = items1[p1]
>>>     print('*fail p1, v1, v2 = {}, {}, {}'.format(p1, v1, v2))
>>> for p1 in return_info['passlist']:
>>>     v1_ = items1[p1]
>>>     print('*pass p1, v1_ = {}, {}'.format(p1, v1_))
>>> assert not flag
```

```
>>> import ubelt as ub
>>> items1 = ub.IndexableWalker({
>>>     'foo': [1.0000000000000001, 1.],
>>>     'bar': 1,
>>>     'baz': [],
>>> })
>>> items2 = ub.IndexableWalker({
>>>     'foo': [0.9999999999999999, 1.],
>>>     'bar': 1,
>>>     'baz': [],
>>> })
>>> flag, return_info = items1.allclose(items2, return_info=True)
>>> print('return_info = {}'.format(ub.repr2(return_info, nl=1)))
>>> print('flag = {!r}'.format(flag))
>>> assert flag
```

Example

```
>>> import ubelt as ub
>>> flag, return_info = ub.IndexableWalker([]).allclose(ub.IndexableWalker([]),
    ↪ return_info=True)
>>> print('return_info = {!r}'.format(return_info))
>>> print('flag = {!r}'.format(flag))
>>> assert flag
```

Example

```
>>> import ubelt as ub
>>> flag = ub.IndexableWalker([]).allclose([], return_info=False)
>>> print('flag = {!r}'.format(flag))
>>> assert flag
```

Example

```
>>> import ubelt as ub
>>> flag, return_info = ub.IndexableWalker([]).allclose([1], return_info=True)
>>> print('return_info = {!r}'.format(return_info))
>>> print('flag = {!r}'.format(flag))
>>> assert not flag
```

Example

```
>>> # xdoctest: +REQUIRES(module:numpy)
>>> import ubelt as ub
>>> import numpy as np
>>> a = np.random.rand(3, 5)
>>> b = a + 1
>>> wa = ub.IndexableWalker(a, list_cls=(np.ndarray,))
>>> wb = ub.IndexableWalker(b, list_cls=(np.ndarray,))
>>> flag, return_info = wa.allclose(wb, return_info=True)
>>> print('return_info = {!r}'.format(return_info))
>>> print('flag = {!r}'.format(flag))
>>> assert not flag
>>> a = np.random.rand(3, 5)
>>> b = a.copy() + 1e-17
>>> wa = ub.IndexableWalker([a], list_cls=(np.ndarray, list))
>>> wb = ub.IndexableWalker([b], list_cls=(np.ndarray, list))
>>> flag, return_info = wa.allclose(wb, return_info=True)
>>> assert flag
>>> print('return_info = {!r}'.format(return_info))
>>> print('flag = {!r}'.format(flag))
```

_abc_impl = <_abc._abc_data object>

kwcoc.util.NOT(TYPE)

kwcoc.util.OBJECT(PROPERTIES={}, **kw)

<https://json-schema.org/understanding-json-schema/reference/object.html>

Example

```
>>> import jsonschema
>>> schema = elem.OBJECT()
>>> jsonschema.validate({}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.ANY(),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'])
>>> jsonschema.validate({'key1': None}, schema)
>>> #
>>> import jsonschema
>>> schema = elem.OBJECT({
>>>     'key1': elem.OBJECT({'arr': elem.ARRAY()}),
>>>     'key2': elem.ANY(),
>>> }, required=['key1'], title='a title')
>>> schema.validate()
>>> print('schema = {}'.format(ub.urepr(schema, sort=1, nl=-1)))
>>> jsonschema.validate({'key1': {'arr': []}}, schema)
schema = {
    'properties': {
        'key1': {
            'properties': {
                'arr': {'items': {}, 'type': 'array'}
            },
            'type': 'object'
        },
        'key2': {}
    },
    'required': ['key1'],
    'title': 'a title',
    'type': 'object'
}
```

`kwcoco.util.ONEOF(*TYPES)`

`class kwcoco.util.QuantifierElements`

Bases: `object`

Quantifier types

<https://json-schema.org/understanding-json-schema/reference/combing.html#allof>

Example

```
>>> from kwcoc.util.jsonschema_elements import * # NOQA
>>> elem.ANYOF(elem.STRING, elem.NUMBER).validate()
>>> elem.ONEOF(elem.STRING, elem.NUMBER).validate()
>>> elem.NOT(elem.NULL).validate()
>>> elem.NOT(elem.ANY).validate()
>>> elem.ANY.validate()
```

property ANY

ALLOF(*TYPES)

ANYOF(*TYPES)

ONEOF(*TYPES)

NOT(TYPE)

class kwcoc.util.ScalarElements

Bases: `object`

Single-valued elements

property NULL

[/json-schema.org/understanding-json-schema/reference/null.html](https://json-schema.org/understanding-json-schema/reference/null.html)

Type

[https](https://)

property BOOLEAN

[/json-schema.org/understanding-json-schema/reference/null.html](https://json-schema.org/understanding-json-schema/reference/null.html)

Type

[https](https://)

property STRING

[/json-schema.org/understanding-json-schema/reference/string.html](https://json-schema.org/understanding-json-schema/reference/string.html)

Type

[https](https://)

property NUMBER

[/json-schema.org/understanding-json-schema/reference/numeric.html#number](https://json-schema.org/understanding-json-schema/reference/numeric.html#number)

Type

[https](https://)

property INTEGER

[/json-schema.org/understanding-json-schema/reference/numeric.html#integer](https://json-schema.org/understanding-json-schema/reference/numeric.html#integer)

Type

[https](https://)

class kwcoc.util.SchemaElements

Bases: `ScalarElements, QuantifierElements, ContainerElements`

Functional interface into defining jsonschema structures.

See mixin classes for details.

References

<https://json-schema.org/understanding-json-schema/>

Todo:

- [] Generics: title, description, default, examples
-

CommandLine

```
xdoctest -m /home/joncrall/code/kwcoco/kwcoco/util/jsonschema_elements.py
↳ SchemaElements
```

Example

```
>>> from kwcoco.util.jsonschema_elements import * # NOQA
>>> elem = SchemaElements()
>>> elem.ARRAY(elem.ANY())
>>> schema = OBJECT({
>>>     'prop1': ARRAY(INTEGER, minItems=3),
>>>     'prop2': ARRAY(STRING, numItems=2),
>>>     'prop3': ARRAY(OBJECT({
>>>         'subprob1': NUMBER,
>>>         'subprob2': NUMBER,
>>>     })),
>>> })
>>> print('schema = {}'.format(ub.urepr(schema, nl=2, sort=1)))
schema = {
    'properties': {
        'prop1': {'items': {'type': 'integer'}, 'minItems': 3, 'type': 'array'},
        'prop2': {'items': {'type': 'string'}, 'maxItems': 2, 'minItems': 2, 'type':
↳ ': 'array'},
        'prop3': {'items': {'properties': {'subprob1': {'type': 'number'}, 'subprob2':
↳ ': {'type': 'number'}}}, 'type': 'object'}, 'type': 'array'},
    },
    'type': 'object',
}
```

```
>>> TYPE = elem.OBJECT({
>>>     'p1': ANY,
>>>     'p2': ANY,
>>> }, required=['p1'])
>>> import jsonschema
>>> inst = {'p1': None}
>>> jsonschema.validate(inst, schema=TYPE)
>>> #jsonschema.validate({'p2': None}, schema=TYPE)
```

```
class kwcoco.util.StratifiedGroupKFold(n_splits=3, shuffle=False, random_state=None)
```

Bases: _BaseKFold

Stratified K-Folds cross-validator with Grouping

Provides train/test indices to split data in train/test sets.

This cross-validation object is a variation of GroupKFold that returns stratified folds. The folds are made by preserving the percentage of samples for each class.

This is an old interface and should likely be refactored and modernized.

Parameters

`n_splits (int, default=3)` – Number of folds. Must be at least 2.

`_make_test_folds(X, y=None, groups=None)`

Parameters

- `X (ndarray)` – data
- `y (ndarray)` – labels
- `groups (ndarray)` – groupids for items. Items with the same groupid must be placed in the same group.

Returns

`test_folds`

Return type

`list`

Example

```
>>> from kwcoco.util.util_sklearn import * # NOQA
>>> import kwarray
>>> rng = kwarray.ensure_rng(0)
>>> groups = [1, 1, 3, 4, 2, 2, 7, 8, 8]
>>> y      = [1, 1, 1, 1, 2, 2, 2, 3, 3]
>>> X = np.empty((len(y), 0))
>>> self = StratifiedGroupKFold(random_state=rng, shuffle=True)
>>> skf_list = list(self.split(X=X, y=y, groups=groups))
>>> import ubelt as ub
>>> print(ub.urepr(skf_list, nl=1, with_dtype=False))
[
```

```
    (np.array([2, 3, 4, 5, 6]), np.array([0, 1, 7, 8])),
    (np.array([0, 1, 2, 7, 8]), np.array([3, 4, 5, 6])),
    (np.array([0, 1, 3, 4, 5, 6, 7, 8]), np.array([2])),
```

```
]
```

`_iter_test_masks(X, y=None, groups=None)`

`split(X, y, groups=None)`

Generate indices to split data into training and test set.

`_abc_impl = <_abc._abc_data object>`

`kwcoco.util.ensure_json_serializable(dict_, normalize_containers=False, verbose=0)`

Attempt to convert common types (e.g. numpy) into something json compliant

Convert numpy and tuples into lists

Parameters

normalize_containers (*bool*) – if True, normalizes dict containers to be standard python structures. Defaults to False.

Example

```
>>> data = ub.ddict(lambda: int)
>>> data['foo'] = ub.ddict(lambda: int)
>>> data['bar'] = np.array([1, 2, 3])
>>> data['foo']['a'] = 1
>>> data['foo']['b'] = (1, np.array([1, 2, 3]), {3: np.int32(3), 4: np.float16(1.0)})
->
>>> dict_ = data
>>> print(ub.urepr(data, nl=-1))
>>> assert list(find_json_unserializable(data))
>>> result = ensure_json_serializable(data, normalize_containers=True)
>>> print(ub.urepr(result, nl=-1))
>>> assert not list(find_json_unserializable(result))
>>> assert type(result) is dict
```

`kwcocoo.util.find_json_unserializable(data, quickcheck=False)`

Recurse through json datastructure and find any component that causes a serialization error. Record the location of these errors in the datastructure as we recurse through the call tree.

Parameters

- **data** (*object*) – data that should be json serializable
- **quickcheck** (*bool*) – if True, check the entire datastructure assuming its ok before doing the python-based recursive logic.

Returns

list of “bad part” dictionaries containing items

’value’ - the value that caused the serialization error

’loc’ - which contains a list of key/indexes that can be used to lookup the location of the unserializable value. If the “loc” is a list, then it indicates a rare case where a key in a dictionary is causing the serialization error.

Return type

List[Dict]

Example

```
>>> from kwcocoo.util.util_json import * # NOQA
>>> part = ub.ddict(lambda: int)
>>> part['foo'] = ub.ddict(lambda: int)
>>> part['bar'] = np.array([1, 2, 3])
>>> part['foo']['a'] = 1
>>> # Create a dictionary with two unserializable parts
>>> data = [1, 2, {'nest1': [2, part]}, {frozenset({'badkey'}): 3, 2: 4}]
>>> parts = list(find_json_unserializable(data))
>>> print('parts = {}'.format(ub.urepr(parts, nl=1)))
```

(continues on next page)

(continued from previous page)

```
>>> # Check expected structure of bad parts
>>> assert len(parts) == 2
>>> part = parts[1]
>>> assert list(part['loc']) == [2, 'nest1', 1, 'bar']
>>> # We can use the "loc" to find the bad value
>>> for part in parts:
>>>     # "loc" is a list of directions containing which keys/indexes
>>>     # to traverse at each descent into the data structure.
>>>     directions = part['loc']
>>>     curr = data
>>>     special_flag = False
>>>     for key in directions:
>>>         if isinstance(key, list):
>>>             # special case for bad keys
>>>             special_flag = True
>>>             break
>>>         else:
>>>             # normal case for bad values
>>>             curr = curr[key]
>>>     if special_flag:
>>>         assert part['data'] in curr.keys()
>>>         assert part['data'] is key[1]
>>>     else:
>>>         assert part['data'] is curr
```

kwcoc.util.indexable_allclose(dct1, dct2, return_info=False)

Walks through two nested data structures and ensures that everything is roughly the same.

Note: Use the version in ubelt instead

Parameters

- **dct1** – a nested indexable item
- **dct2** – a nested indexable item

Example

```
>>> from kwcoc.util.util_json import indexable_allclose
>>> dct1 = {
>>>     'foo': [1.222222, 1.333],
>>>     'bar': 1,
>>>     'baz': [],
>>> }
>>> dct2 = {
>>>     'foo': [1.22222, 1.333],
>>>     'bar': 1,
>>>     'baz': [],
>>> }
>>> assert indexable_allclose(dct1, dct2)
```

`kwcocoo.util.resolve_directory_symlinks(path)`

Only resolve symlinks of directories, not the base file

`kwcocoo.util.resolve_relative_to(path, dpath, strict=False)`

Given a path, try to resolve its symlinks such that it is relative to the given dpath.

Example

```
>>> from kwcocoo.util.util_reroot import * # NOQA
>>> import os
>>> def _symlink(self, target, verbose=0):
>>>     return ub.Path(ub.symlink(target, self, verbose=verbose))
>>> ub.Path._symlink = _symlink
>>> #
>>> # TODO: try to enumerate all basic cases
>>> #
>>> base = ub.Path.apendir('kwcocoo/tests/reroot')
>>> base.delete().ensuredir()
>>> #
>>> drive1 = (base / 'drive1').ensuredir()
>>> drive2 = (base / 'drive2').ensuredir()
>>> #
>>> data_repo1 = (drive1 / 'data_repo1').ensuredir()
>>> cache = (data_repo1 / '.cache').ensuredir()
>>> real_file1 = (cache / 'real_file1').touch()
>>> #
>>> real_bundle = (data_repo1 / 'real_bundle').ensuredir()
>>> real_assets = (real_bundle / 'assets').ensuredir()
>>> #
>>> # Symlink file outside of the bundle
>>> link_file1 = (real_assets / 'link_file1')._symlink(real_file1)
>>> real_file2 = (real_assets / 'real_file2').touch()
>>> link_file2 = (real_assets / 'link_file2')._symlink(real_file2)
>>> #
>>> #
>>> # A symlink to the data repo
>>> data_repo2 = (drive1 / 'data_repo2')._symlink(data_repo1)
>>> data_repo3 = (drive2 / 'data_repo3')._symlink(data_repo1)
>>> data_repo4 = (drive2 / 'data_repo4')._symlink(data_repo2)
>>> #
>>> # A prediction repo TODO
>>> pred_repo5 = (drive2 / 'pred_repo5').ensuredir()
>>> #
>>> # _ = ub.cmd(f'tree -a {base}', verbose=3)
>>> #
>>> fpaths = []
>>> for r, ds, fs in os.walk(base, followlinks=True):
>>>     for f in fs:
>>>         if 'file' in f:
>>>             fpath = ub.Path(r) / f
>>>             fpaths.append(fpath)
>>> #
```

(continues on next page)

(continued from previous page)

```
>>> #
>>> dpath = real_bundle.resolve()
>>> #
>>> for path in fpPaths:
>>>     # print(f'{path}')
>>>     # print(f'{path.resolve()=}')
>>>     resolved_rel = resolve_relative_to(path, dpath)
>>>     print('resolved_rel = {!r}'.format(resolved_rel))
```

`kwcoco.util.smart_truncate(string, max_length=0, separator='', trunc_loc=0.5, trunc_char='~')`

Truncate a string. :param string (str): string for modification :param max_length (int): output string length :param word_boundary (bool): :param save_order (bool): if True then word order of output string is like input string :param separator (str): separator between words :param trunc_loc (float): fraction of location where to remove the text

trunc_char (str): the character to denote where truncation is starting

Returns

`kwcoco.util.special_reroot_single(dset, verbose=0)`

`kwcoco.util.unarchive_file(archive_fpath, output_dpath='.', verbose=1, overwrite=True)`

2.1.2 Submodules

2.1.2.1 kwcoco.__main__ module

2.1.2.2 kwcoco._helpers module

These items were split out of coco_dataset.py which is becoming too big

These are helper data structures used to do things like auto-increment ids, recycle ids, do renaming, extend sortedcontainers etc...

`class kwcoco._helpers._NextId(parent)`

Bases: `object`

Helper class to tracks unused ids for new items

`_update_unused(key)`

Scans for what the next safe id can be for key

`get(key)`

Get the next safe item id for key

`class kwcoco._helpers._ID_Remapper(reuse=False)`

Bases: `object`

Helper to recycle ids for unions.

For each dataset we create a mapping between each old id and a new id. If possible and reuse=True we allow the new id to match the old id. After each dataset is finished we mark all those ids as used and subsequent new-ids cannot be chosen from that pool.

Parameters

`reuse (bool)` – if True we are allowed to reuse ids as long as they haven't been used before.

Example

```
>>> video_trackids = [[1, 1, 3, 3, 200, 4], [204, 1, 2, 3, 3, 4, 5, 9]]
>>> self = _ID_Remapper(reuse=True)
>>> for tids in video_trackids:
>>>     new_tids = [self.remap(old_tid) for old_tid in tids]
>>>     self.block_seen()
>>>     print('new_tids = {!r}'.format(new_tids))
new_tids = [1, 1, 3, 3, 200, 4]
new_tids = [204, 205, 2, 206, 207, 5, 9]
>>> #
>>> self = _ID_Remapper(reuse=False)
>>> for tids in video_trackids:
>>>     new_tids = [self.remap(old_tid) for old_tid in tids]
>>>     self.block_seen()
>>>     print('new_tids = {!r}'.format(new_tids))
new_tids = [0, 0, 1, 1, 2, 3]
new_tids = [4, 5, 6, 7, 7, 8, 9, 10]
```

`remap(old_id)`

Convert a old-id into a new-id. If `self.reuse` is True then we will return the same id if it hasn't been blocked yet.

`block_seen()`

Mark all seen ids as unable to be used. Any ids sent to remap will now generate new ids.

`next_id()`

Generate a new id that hasn't been used yet

`class kwcoco._helpers.UniqueNameRemapper`

Bases: `object`

helper to ensure names will be unique by appending suffixes

Example

```
>>> from kwcoco.coco_dataset import * # NOQA
>>> self = UniqueNameRemapper()
>>> assert self.remap('foo') == 'foo'
>>> assert self.remap('foo') == 'foo_v001'
>>> assert self.remap('foo') == 'foo_v002'
>>> assert self.remap('foo_v001') == 'foo_v003'
```

`remap(name)`

`kwcoco._helpers._lut_image_index(imgs, gid)`

`kwcoco._helpers._lut_frame_index(imgs, gid)`

`kwcoco._helpers._lut_annot_index(imgs, anns, aid)`

`class kwcoco._helpers.SortedSet(iterable=None, key=None)`

Bases: `SortedSet`

Initialize sorted set instance.

Optional *iterable* argument provides an initial iterable of values to initialize the sorted set.

Optional *key* argument defines a callable that, like the *key* argument to Python's *sorted* function, extracts a comparison key from each value. The default, `None`, compares values directly.

Runtime complexity: $O(n * \log(n))$

```
>>> ss = SortedSet([3, 1, 2, 5, 4])
>>> ss
SortedSet([1, 2, 3, 4, 5])
>>> from operator import neg
>>> ss = SortedSet([3, 1, 2, 5, 4], neg)
>>> ss
SortedSet([5, 4, 3, 2, 1], key=<built-in function neg>)
```

Parameters

- **iterable** – initial values (optional)
- **key** – function used to extract comparison key (optional)

`_abc_impl = <_abc._abc_data object>`

`kwcoco._helpers.SortedSetQuiet`

alias of `SortedSet`

`kwcoco._helpers._delitems(items, remove_idxs, thresh=750)`

Parameters

- **items** (*List*) – list which will be modified
- **remove_idxs** (*List[int]*) – integers to remove (MUST BE UNIQUE)

`kwcoco._helpers._load_and_postprocess(data, loader, postprocess, **loadkw)`

`kwcoco._helpers._image_corruption_check(fpath, only_shape=False)`

2.1.2.3 `kwcoco.abstract_coco_dataset` module

`class kwcoco.abstract_coco_dataset.AbstractCocoDataset`

Bases: `ABC`

This is a common base for all variants of the Coco Dataset

At the time of writing there is `kwcoco.CocoDataset` (which is the dictionary-based backend), and the `kwcoco.coco_sql_dataset.CocoSqlDataset`, which is experimental.

`_abc_impl = <_abc._abc_data object>`

2.1.2.4 kwcoco.category_tree module

The `category_tree` module defines the `CategoryTree` class, which is used for maintaining flat or hierarchical category information. The kwcoco version of this class only contains the datastructure and does not contain any torch operations. See the ndsampler version for the extension with torch operations.

```
class kwcoco.category_tree.CategoryTree(graph=None, checks=True)
```

Bases: `NiceRepr`

Wrapper that maintains flat or hierarchical category information.

Helps compute softmaxes and probabilities for tree-based categories where a directed edge (A, B) represents that A is a superclass of B.

Note: There are three basic properties that this object maintains:

`node`:

Alphanumeric string names that should be generally descriptive. Using spaces `and` special characters `in` these names `is` discouraged, but can be done. This `is` the COCO category "`name`" attribute. For categories this may be denoted `as` (`name`, `node`, `cname`, `catname`).

`id`:

The integer `id` of a category should ideally remain consistent. These are often given by a dataset (e.g. a COCO dataset). This `is` the COCO category "`id`" attribute. For categories this `is` often denoted `as` (`id`, `cid`).

`index`:

Contiguous zero-based indices that indexes the `list` of categories. These should be used `for` the fastest access `in` backend computation tasks. Typically corresponds to the ordering of the channels `in` the final linear layer `in` an associated model. For categories this `is` often denoted `as` (`index`, `cidx`, `idx`, `or` `cx`).

Variables

- `idx_to_node` (`List[str]`) – a list of class names. Implicitly maps from index to category name.
- `id_to_node` (`Dict[int, str]`) – maps integer ids to category names
- `node_to_id` (`Dict[str, int]`) – maps category names to ids
- `node_to_idx` (`Dict[str, int]`) – maps category names to indexes
- `graph` (`networkx.Graph`) – a Graph that stores any hierarchy information. For standard mutually exclusive classes, this graph is edgeless. Nodes in this graph can maintain category attributes / properties.
- `idx_groups` (`List[List[int]]`) – groups of category indices that share the same parent category.

Example

```
>>> from kwcoc.category_tree import *
>>> graph = nx.from_dict_of_lists({
...     'background': [],
...     'foreground': ['animal'],
...     'animal': ['mammal', 'fish', 'insect', 'reptile'],
...     'mammal': ['dog', 'cat', 'human', 'zebra'],
...     'zebra': ['grevys', 'plains'],
...     'grevys': ['fred'],
...     'dog': ['boxer', 'beagle', 'golden'],
...     'cat': ['maine coon', 'persian', 'sphynx'],
...     'reptile': ['bearded dragon', 't-rex'],
... }, nx.DiGraph)
>>> self = CategoryTree(graph)
>>> print(self)
<CategoryTree(nNodes=22, maxDepth=6, maxBreadth=4...)>
```

Example

```
>>> # The coerce classmethod is the easiest way to create an instance
>>> import kwcoc
>>> kwcoc.CategoryTree.coerce(['a', 'b', 'c'])
<CategoryTree...nNodes=3, nodes='a', 'b', 'c'...
>>> kwcoc.CategoryTree.coerce(4)
<CategoryTree...nNodes=4, nodes='class_1', 'class_2', 'class_3', ...
>>> kwcoc.CategoryTree.coerce(4)
```

Parameters

- **graph** (*nx.DiGraph*) – either the graph representing a category hierarchy
- **checks** (*bool, default=True*) – if false, bypass input checks

copy()

classmethod from_mutex(nodes, bg_hack=True)

Parameters

nodes (*List[str]*) – or a list of class names (in which case they will all be assumed to be mutually exclusive)

Example

```
>>> print(CategoryTree.from_mutex(['a', 'b', 'c']))
<CategoryTree(nNodes=3, ...)>
```

classmethod from_json(state)

Parameters

state (*Dict*) – see `__getstate__` / `__json__` for details

classmethod from_coco(categories)

Create a CategoryTree object from coco categories

Parameters

`List[Dict]` – list of coco-style categories

classmethod coerce(data, **kw)

Attempt to coerce data as a CategoryTree object.

This is primarily useful for when the software stack depends on categories being represented

This will work if the input data is a specially formatted json dict, a list of mutually exclusive classes, or if it is already a CategoryTree. Otherwise an error will be thrown.

Parameters

- `data (object)` – a known representation of a category tree.
- `**kwargs` – input type specific arguments

Returns

`self`

Return type

`CategoryTree`

Raises

- `TypeError` – if the input format is unknown –
- `ValueError` – if kwargs are not compatible with the input format –

Example

```
>>> import kwcoco
>>> classes1 = kwcoco.CategoryTree.coerce(3) # integer
>>> classes2 = kwcoco.CategoryTree.coerce(classes1.__json__()) # graph dict
>>> classes3 = kwcoco.CategoryTree.coerce(['class_1', 'class_2', 'class_3']) # list
>>> classes4 = kwcoco.CategoryTree.coerce(classes1.graph) # nx Graph
>>> classes5 = kwcoco.CategoryTree.coerce(classes1) # cls
>>> # xdoctest: +REQUIRES(module:ndsampler)
>>> import ndsampler
>>> classes6 = ndsampler.CategoryTree.coerce(3)
>>> classes7 = ndsampler.CategoryTree.coerce(classes1)
>>> classes8 = kwcoco.CategoryTree.coerce(classes6)
```

classmethod demo(key='coco', **kwargs)**Parameters**

`key (str)` – specify which demo dataset to use. Can be ‘coco’ (which uses the default coco demo data). Can be ‘btree’ which creates a binary tree and accepts kwargs ‘r’ and ‘h’ for branching-factor and height. Can be ‘btree2’, which is the same as btree but returns strings

CommandLine

```
xdoc test -m ~/code/kwCOCO/kwCOCO/category_tree.py CategoryTree.demo
```

Example

```
>>> from kwCOCO.category_tree import *
>>> self = CategoryTree.demo()
>>> print('self = {}'.format(self))
self = <CategoryTree(nNodes=10, maxDepth=2, maxBreadth=4...)>
```

to_coco()

Converts to a coco-style data structure

Yields

Dict – coco category dictionaries

property id_to_idx

Example:

```
>>> import kwCOCO
>>> self = kwCOCO.CategoryTree.demo()
>>> self.id_to_idx[1]
```

property idx_to_id

Example:

```
>>> import kwCOCO
>>> self = kwCOCO.CategoryTree.demo()
>>> self.idx_to_id[0]
```

idx_to_ancestor_idxs(*include_self=True*)

Mapping from a class index to its ancestors

Parameters

`include_self (bool, default=True)` – if True includes each node as its own ancestor.

idx_to_descendants_idxs(*include_self=False*)

Mapping from a class index to its descendants (including itself)

Parameters

`include_self (bool, default=False)` – if True includes each node as its own descendant.

idx_pairwise_distance()

Get a matrix encoding the distance from one class to another.

Distances

- from parents to children are positive (descendants),
- from children to parents are negative (ancestors),
- between unreachable nodes (wrt to forward and reverse graph) are nan.

is_mutex()

Returns True if all categories are mutually exclusive (i.e. flat)

If true, then the classes may be represented as a simple list of class names without any loss of information, otherwise the underlying category graph is necessary to preserve all knowledge.

Todo:

- [] what happens when we have a dummy root?
-

property num_classes**property class_names****property category_names****property cats**

Returns a mapping from category names to category attributes.

If this category tree was constructed from a coco-dataset, then this will contain the coco category attributes.

Returns

Dict[str, Dict[str, object]]

Example

```
>>> from kwcoco.category_tree import *
>>> self = CategoryTree.demo()
>>> print('self.cats = {!r}'.format(self.cats))
```

index(node)

Return the index that corresponds to the category name

_build_index()

construct lookup tables

show()**forest_str()****normalize()**

Applies a normalization scheme to the categories.

Note: this may break other tasks that depend on exact category names.

Returns

CategoryTree

Example

```
>>> from kwcoco.category_tree import * # NOQA
>>> import kwcoco
>>> orig = kwcoco.CategoryTree.demo('animals_v1')
>>> self = kwcoco.CategoryTree(nx.relabel_nodes(orig.graph, str.upper))
>>> norm = self.normalize()
```

2.1.2.5 kwcoco.channel_spec module

The ChannelSpec and FusedChannelSpec represent a set of channels or bands in an image. This could be as simple as red|green|blue, or more complex like: red|green|blue|nir|swir16|swir22.

This functionality has been moved to “delayed_image”.

2.1.2.6 kwcoco.coco_dataset module

An implementation and extension of the original MS-COCO API [CocoFormat].

Extends the format to also include line annotations.

The following describes psuedo-code for the high level spec (some of which may not be have full support in the Python API). A formal json-schema is defined in [kwcoco.coco_schema](#).

Note: The main object in this file is [CocoDataset](#), which is composed of several mixin classes. See the class and method documentation for more details.

An informal description of the spec given in: [coco_schema_informal.rst](#).

For a formal description of the spec see the [coco_schema.json](#), which is generated by :py:mod`kwcoco/coco_schema`.

Todo:

- [] Use **ijson (modified to support NaN) to lazily load pieces of the** dataset in the background or on demand. This will give us faster access to categories / images, whereas we will always have to wait for annotations etc...
- [X] Should img_root be changed to bundle_dpath?
- [] Read video data, return numpy arrays (requires API for images)
- [] Spec for video URI, and convert to frames @ framerate function.
- [x] Document channel spec
- [x] Document sensor-channel spec
- [X] Add remove videos method
- [] **Efficiency: Make video annotations more efficient by only tracking** keyframes, provide an API to obtain a dense or interpolated annotation on an intermediate frame.
- [] **Efficiency: Allow each section of the kwcoco file to be written as a** separate json file. Perhaps allow generic pointer support? Might get messy.
- [] Reroot needs to be redesigned very carefully.
- [] Allow parts of the kwcoco file to be references to other json files.

- [] Add top-level track table (in progress)

References

`class kwcoco.coco_dataset.MixinCocoDeprecate`

Bases: `object`

These functions are marked for deprecation and will be removed

`keypoint_annotation_frequency()`

DEPRECATED

Example

```
>>> import kwcoco
>>> import ubelt as ub
>>> self = kwcoco.CocoDataset.demo('shapes', rng=0)
>>> hist = self.keypoint_annotation_frequency()
>>> hist = ub.odict(sorted(hist.items()))
>>> # FIXME: for whatever reason demodata generation is not determinstic when
>>>     ~seeded
>>> print(ub.urepr(hist))  # xdoc: +IGNORE_WANT
{
    'bot_tip': 6,
    'left_eye': 14,
    'mid_tip': 6,
    'right_eye': 14,
    'top_tip': 6,
}
```

`category_annotation_type_frequency()`

DEPRECATED

Reports the number of annotations of each type for each category

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> hist = self.category_annotation_frequency()
>>> print(ub.urepr(hist))
```

`imread(gid)`

DEPRECATED: use `load_image` or `delayed_image`

Loads a particular image

`class kwcoco.coco_dataset.MixinCocoAccessors`

Bases: `object`

TODO: better name

```
delayed_load(gid, channels=None, space='image')
```

Experimental method

Parameters

- **gid** (*int*) – image id to load
- **channels** (*kwCOCO.FusedChannelSpec*) – specific channels to load. if unspecified, all channels are loaded.
- **space** (*str*) – can either be “image” for loading in image space, or “video” for loading in video space.

Todo:

- [X] **Currently can only take all or none of the channels from each**
base-image / auxiliary dict. For instance if the main image is r|g|b you can't just select g|b at the moment.
 - [X] **The order of the channels in the delayed load should**
match the requested channel order.
 - [X] **TODO:** add nans to bands that don't exist or throw an error
-

Example

```
>>> import kwCOCO
>>> gid = 1
>>> #
>>> self = kwCOCO.CocoDataset.demo('vidshapes8-multispectral')
>>> delayed = self.delayed_load(gid)
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> #
>>> self = kwCOCO.CocoDataset.demo('shapes8')
>>> delayed = self.delayed_load(gid)
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

```
>>> crop = delayed.crop((slice(0, 3), slice(0, 3)))
>>> crop.finalize()
```

```
>>> # TODO: should only select the "red" channel
>>> self = kwCOCO.CocoDataset.demo('shapes8')
>>> delayed = self.delayed_load(gid, channels='r')
```

```
>>> import kwCOCO
>>> gid = 1
>>> #
>>> self = kwCOCO.CocoDataset.demo('vidshapes8-multispectral')
>>> delayed = self.delayed_load(gid, channels='B1|B2', space='image')
>>> print('delayed = {!r}'.format(delayed))
>>> delayed = self.delayed_load(gid, channels='B1|B2|B11', space='image')
```

(continues on next page)

(continued from previous page)

```
>>> print('delayed = {!r}'.format(delayed))
>>> delayed = self.delayed_load(gid, channels='B8|B1', space='video')
>>> print('delayed = {!r}'.format(delayed))
```

```
>>> delayed = self.delayed_load(gid, channels='B8|foo|bar|B1', space='video')
>>> print('delayed = {!r}'.format(delayed))
```

load_image(*gid_or_img*, *channels=None*)

Reads an image from disk and

Parameters

- **gid_or_img** (*int | dict*) – image id or image dict
- **channels** (*str | None*) – if specified, load data from auxiliary channels instead

Returns

the image

Return type

np.ndarray

Note: Prefer to use the CocoImage methods instead**get_image_fpath**(*gid_or_img*, *channels=None*)

Returns the full path to the image

Parameters

- **gid_or_img** (*int | dict*) – image id or image dict
- **channels** (*str | None*) – if specified, return a path to data containing auxiliary channels instead

Note: Prefer to use the CocoImage methods instead**Returns**

full path to the image

Return type

PathLike

_get_img_auxiliary(*gid_or_img*, *channels*)

returns the auxiliary dictionary for a specific channel

get_auxiliary_fpath(*gid_or_img*, *channels*)

Returns the full path to auxiliary data for an image

Parameters

- **gid_or_img** (*int | dict*) – an image or its id
- **channels** (*str*) – the auxiliary channel to load (e.g. disparity)

Note: Prefer to use the CocoImage methods instead

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('shapes8', aux=True)
>>> self.get_auxiliary_fpath(1, 'disparity')
```

`load_annot_sample(aid_or_ann, image=None, pad=None)`

Reads the chip of an annotation. Note this is much less efficient than using a sampler, but it doesn't require disk cache.

Maybe deprecate?

Parameters

- `aid_or_int (int | dict)` – annot id or dict
- `image (ArrayLike | None)` – preloaded image (note: this process is inefficient unless image is specified)

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> sample = self.load_annot_sample(2, pad=100)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> kwplot.imshow(sample['im'])
>>> kwplot.show_if_requested()
```



_resolve_to_id(*id_or_dict*)

Ensures output is an id

_resolve_to_cid(*id_or_name_or_dict*)

Ensures output is an category id

Note: this does not resolve aliases (yet), for that see `_alias_to_cat`

Todo: we could maintain an alias index to make this fast

_resolve_to_gid(*id_or_name_or_dict*)

Ensures output is an category id

_resolve_to_vidid(*id_or_name_or_dict*)

Ensures output is an video id

_resolve_to_trackid(*id_or_name_or_dict*)**_resolve_to_ann(*aid_or_ann*)**

Ensures output is an annotation dictionary

_resolve_to_img(*gid_or_img*)

Ensures output is an image dictionary

_resolve_to_kpcat(*kp_identifier*)

Lookup a keypoint-category dict via its name or id

Parameters

kp_identifier (*int | str | dict*) – either the keypoint category name, alias, or its key-point_category_id.

Returns

keypoint category dictionary

Return type

Dict

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('shapes')
>>> kpcat1 = self._resolve_to_kpcat(1)
>>> kpcat2 = self._resolve_to_kpcat('left_eye')
>>> assert kpcat1 is kpcat2
>>> import pytest
>>> with pytest.raises(KeyError):
>>>     self._resolve_to_cat('human')
```

_resolve_to_cat(cat_identifier)

Lookup a coco-category dict via its name, alias, or id.

Parameters

cat_identifier (*int | str | dict*) – either the category name, alias, or its category_id.

Raises

KeyError – if the category doesn't exist.

Note: If the index is not built, the method will work but may be slow.

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> cat = self._resolve_to_cat('human')
>>> import pytest
>>> assert self._resolve_to_cat(cat['id']) is cat
>>> assert self._resolve_to_cat(cat) is cat
>>> with pytest.raises(KeyError):
>>>     self._resolve_to_cat(32)
>>> self.index.clear()
>>> assert self._resolve_to_cat(cat['id']) is cat
>>> with pytest.raises(KeyError):
>>>     self._resolve_to_cat(32)
```

_alias_to_cat(alias_catname)

Lookup a coco-category via its name or an “alias” name. In production code, use `_resolve_to_cat()` instead.

Parameters

alias_catname (*str*) – category name or alias

Returns

coco category dictionary

Return type

`dict`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> cat = self._alias_to_cat('human')
>>> import pytest
>>> with pytest.raises(KeyError):
>>>     self._alias_to_cat('person')
>>> cat['alias'] = ['person']
>>> self._alias_to_cat('person')
>>> cat['alias'] = 'person'
>>> self._alias_to_cat('person')
>>> assert self._alias_to_cat(None) is None
```

category_graph()

Construct a networkx category hierarchy

Returns

`graph`: a directed graph where category names are the nodes, supercategories define edges, and items in each category dict (e.g. category id) are added as node properties.

Return type

`networkx.DiGraph`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> graph = self.category_graph()
>>> assert 'astronaut' in graph.nodes()
>>> assert 'keypoints' in graph.nodes['human']
```

object_categories()

Construct a consistent CategoryTree representation of object classes

Returns

category data structure

Return type

`kwcoco.CategoryTree`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> classes = self.object_categories()
>>> print('classes = {}'.format(classes))
```

keypoint_categories()

Construct a consistent CategoryTree representation of keypoint classes

Returns

category data structure

Return type

kwcoco.CategoryTree

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> classes = self.keypoint_categories()
>>> print('classes = {}'.format(classes))
```

_keypoint_category_names()

Construct keypoint categories names.

Uses new-style if possible, otherwise this falls back on old-style.

Returns

names - list of keypoint category names

Return type

List[str]

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> names = self._keypoint_category_names()
>>> print(names)
```

_lookup_kpnames(cid)

Get the keypoint categories for a certain class

_coco_image(gid)**coco_image(gid)****Parameters**

gid (*int*) – image id

Returns

CocoImage

```
class kwcoco.coco_dataset.MixinCocoExtras
```

Bases: `object`

Misc functions for coco

```
classmethod coerce(key, sqlview=False, **kw)
```

Attempt to transform the input into the intended CocoDataset.

Parameters

- **key** – this can either be an instance of a CocoDataset, a string URI pointing to an on-disk dataset, or a special key for creating demodata.
- **sqlview** (`bool` | `str`) – If truthy, will return the dataset as a cached sql view, which can be quicker to load and use in some instances. Can be given as a string, which sets the backend that is used: either sqlite or postgresql. Defaults to False.
- ****kw** – passed to whatever constructor is chosen (if any)

Returns

`AbstractCocoDataset` | `kwcoco.CocoDataset` | `kwcoco.CocoSqlDatabase`

Example

```
>>> # test coerce for various input methods
>>> import kwcoco
>>> from kwcoco.coco_sql_dataset import assert_dsets_allclose
>>> dct_dset = kwcoco.CocoDataset.coerce('special:shapes8')
>>> copy1 = kwcoco.CocoDataset.coerce(dct_dset)
>>> copy2 = kwcoco.CocoDataset.coerce(dct_dset.fpath)
>>> assert assert_dsets_allclose(dct_dset, copy1)
>>> assert assert_dsets_allclose(dct_dset, copy2)
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> sql_dset = dct_dset.view_sql()
>>> copy3 = kwcoco.CocoDataset.coerce(sql_dset)
>>> copy4 = kwcoco.CocoDataset.coerce(sql_dset.fpath)
>>> assert assert_dsets_allclose(dct_dset, sql_dset)
>>> assert assert_dsets_allclose(dct_dset, copy3)
>>> assert assert_dsets_allclose(dct_dset, copy4)
```

```
classmethod demo(key='photos', **kwargs)
```

Create a toy coco dataset for testing and demo purposes

Parameters

- **key** (`str`) – Either ‘photos’ (default), ‘shapes’, or ‘vidshapes’. There are also special suffixes that can control behavior.

Basic options that define which flavor of demodata to generate are: `photos`, `shapes`, and `vidshapes`. A numeric suffix e.g. `vidshapes8` can be specified to indicate the size of the generated demo dataset. There are other special suffixes that are available. See the code in this function for explicit details on what is allowed.

TODO: better documentation for these demo datasets.

As a quick summary: the `vidshapes` key is the most robust and mature demodata set, and here are several useful variants of the `vidshapes` key.

- (1) `vidshapes8` - the 8 suffix is the number of videos in this case.

- (2) vidshapes8-multispectral - generate 8 multispectral videos.
- (3) vidshapes8-msi - msi is an alias for multispectral.
- (4) vidshapes8-frames5 - generate 8 videos with 5 frames each.
- (5) vidshapes2-tracks5 - generate 2 videos with 5 tracks each.
- (6) vidshapes2-speed0.1-frames7 - generate 2 videos with 7 frames where the objects move with a speed of 0.1.
- ****kwargs** – if key is shapes, these arguments are passed to toydata generation. The Kwargs section of this docstring documents a subset of the available options. For full details, see `demodata_toy_dset()` and `random_video_dset()`.

Kwargs:

image_size (Tuple[int, int]): width / height size of the images

dpath (str | PathLike):

path to the directory where any generated demo bundles will be written to. Defaults to using kwcoco cache dir.

aux (bool): if True generates dummy auxiliary channels

rng (int | RandomState | None):

random number generator or seed

verbose (int): verbosity mode. Defaults to 3.

Example

```
>>> # Basic demodata keys
>>> print(CocoDataset.demo('photos', verbose=1))
>>> print(CocoDataset.demo('shapes', verbose=1))
>>> print(CocoDataset.demo('vidshapes', verbose=1))
>>> # Variants of demodata keys
>>> print(CocoDataset.demo('shapes8', verbose=0))
>>> print(CocoDataset.demo('shapes8-msi', verbose=0))
>>> print(CocoDataset.demo('shapes8-frames1-speed0.2-msi', verbose=0))
```


Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes5', num_frames=5,
>>>                               verbose=0, rng=None)
>>> dset = kwcoco.CocoDataset.demo('vidshapes5', num_frames=5,
>>>                               num_tracks=4, verbose=0, rng=44)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> pnums = kwplot.PlotNums(nSubplots=len(dset.index.imgs))
>>> fnum = 1
>>> for gx, gid in enumerate(dset.index.imgs.keys()):
>>>     canvas = dset.draw_image(gid=gid)
>>>     kwplot.imshow(canvas, pnum=pnums[gx], fnum=fnum)
```

(continues on next page)

(continued from previous page)

```
>>> #dset.show_image(gid=gid, pnum=pnums[gx])
>>> kwplot.show_if_requested()
```

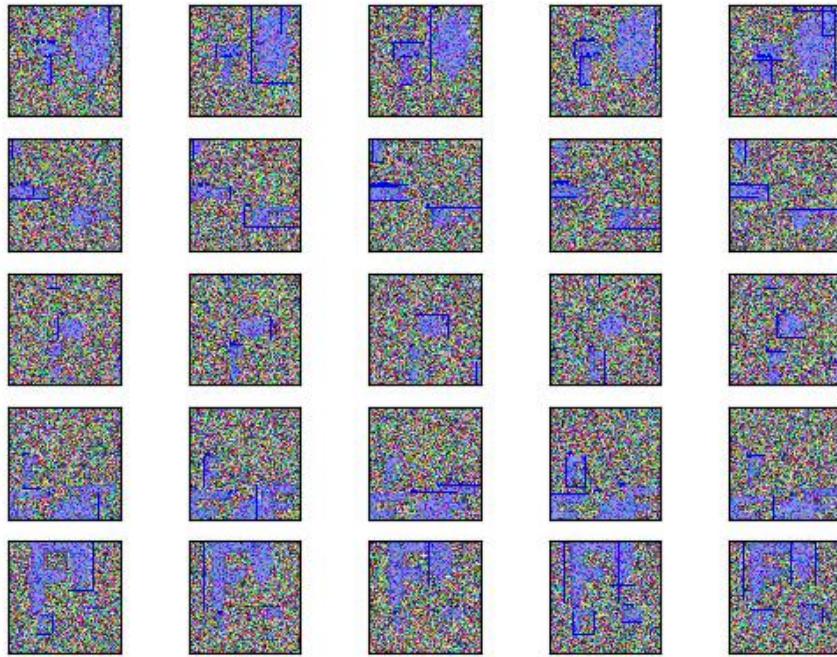

Example

```
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes5-aux', num_frames=1,
>>>                                         verbose=0, rng=None)
```

Example

```
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes1-multispectral', num_frames=5,
>>>                                         verbose=0, rng=None)
>>> # This is the first use-case of image names
>>> assert len(dset.index.file_name_to_img) == 0, (
>>>     'the multispectral demo case has no "base" image')
>>> assert len(dset.index.name_to_img) == len(dset.index.imgs) == 5
>>> dset.remove_images([1])
>>> assert len(dset.index.name_to_img) == len(dset.index.imgs) == 4
>>> dset.remove_videos([1])
>>> assert len(dset.index.name_to_img) == len(dset.index.imgs) == 0
```

`_tree()`
developer helper

`classmethod random(rng=None)`
Creates a random CocoDataset according to distribution parameters

Todo:

- [] parametrize
-

`_build_hashid(hash_pixels=False, verbose=0)`
Construct a hash that uniquely identifies the state of this dataset.

Parameters

- `hash_pixels (bool)` – If False the image data is not included in the hash, which can speed up computation, but is not 100% robust. Defaults to False.
- `verbose (int)` – verbosity level

Returns

the hashid

Return type

str

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> self._build_hashid(hash_pixels=True, verbose=3)
...
>>> # Shorten hashes for readability
>>> import ubelt as ub
>>> walker = ub.IndexableWalker(self.hashid_parts)
>>> for path, val in walker:
>>>     if isinstance(val, str):
>>>         walker[path] = val[0:8]
>>> # Note: this may change in different versions of kwcoco
>>> print('self.hashid_parts = ' + ub.repr(self.hashid_parts))
>>> print('self.hashid = {!r}'.format(self.hashid[0:8]))
self.hashid_parts = {
    'annotations': {
        'json': 'c1d1b9c3',
        'num': 11,
    },
    'images': {
        'pixels': '88e37cc3',
        'json': '9b8e8be3',
        'num': 3,
    },
    'categories': {
        'json': '82d22e00',
        'num': 8,
    }
}
```

(continues on next page)

(continued from previous page)

```

    },
}
self.hashid = 'bf69bf15'

```

Example

```

>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> self._build_hashid(hash_pixels=True, verbose=3)
>>> self.hashid_parts
>>> # Test that when we modify the dataset only the relevant
>>> # hashid parts are recomputed.
>>> orig = self.hashid_parts['categories']['json']
>>> self.add_category('foobar')
>>> assert 'categories' not in self.hashid_parts
>>> self.hashid_parts
>>> self.hashid_parts['images']['json'] = 'should not change'
>>> self._build_hashid(hash_pixels=True, verbose=3)
>>> assert self.hashid_parts['categories']['json']
>>> assert self.hashid_parts['categories']['json'] != orig
>>> assert self.hashid_parts['images']['json'] == 'should not change'

```

`_invalidate_hashid(parts=None)`

Called whenever the coco dataset is modified. It is possible to specify which parts were modified so unmodified parts can be reused next time the hash is constructed.

Todo:

- [] Rename to `_notify_modification` — or something like that

`_cached_hashid()`

Under Construction.

The idea is to cache the hashid when we are sure that the dataset was loaded from a file and has not been modified. We can record the modification time of the file (because we know it hasn't changed in memory), and use that as a key to the cache. If the modification time on the file is different than the one recorded in the cache, we know the cache could be invalid, so we recompute the hashid.

`classmethod _cached_hashid_for(fpather)`

Lookup the cached hashid for a kwcoco json file if it exists.

`_dataset_id()`

A human interpretable name that can be used to uniquely identify the dataset.

Note: This function is currently subject to change.

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> print(self._dataset_id())
>>> self = kwcoco.CocoDataset.demo('vidshapes8')
>>> print(self._dataset_id())
>>> self = kwcoco.CocoDataset()
>>> print(self._dataset_id())
```

`_ensure_imgszie(workers=0, verbose=1, fail=False)`

Populate the imgsize field if it does not exist.

Parameters

- **workers** (*int*) – number of workers for parallel processing.
- **verbose** (*int*) – verbosity level
- **fail** (*bool*) – if True, raises an exception if anything size fails to load.

Returns

a list of “bad” image dictionaries where the size could

not be determined. Typically these are corrupted images and should be removed.

Return type

List[dict]

Example

```
>>> # Normal case
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> bad_imgs = self._ensure_imgszie()
>>> assert len(bad_imgs) == 0
>>> assert self.imgs[1]['width'] == 512
>>> assert self.imgs[2]['width'] == 328
>>> assert self.imgs[3]['width'] == 256
```

```
>>> # Fail cases
>>> self = kwcoco.CocoDataset()
>>> self.add_image('does-not-exist.jpg')
>>> bad_imgs = self._ensure_imgszie()
>>> assert len(bad_imgs) == 1
>>> import pytest
>>> with pytest.raises(Exception):
>>>     self._ensure_imgszie(fail=True)
```

`_ensure_image_data(gids=None, verbose=1)`

Download data from “url” fields if specified.

Parameters

gids (*List*) – subset of images to download

missing_images(*check_aux=True*, *verbose=0*)

Check for images that don't exist

Parameters

- **check_aux** (*bool*) – if specified also checks auxiliary images
- **verbose** (*int*) – verbosity level

Returns

bad indexes and paths and ids

Return type

List[Tuple[int, str, int]]

corrupted_images(*check_aux=True*, *verbose=0*, *workers=0*)

Check for images that don't exist or can't be opened

Parameters

- **check_aux** (*bool*) – if specified also checks auxiliary images
- **verbose** (*int*) – verbosity level
- **workers** (*int*) – number of background workers

Returns

bad indexes and paths and ids

Return type

List[Tuple[int, str, int]]

rename_categories(*mapper*, *rebuild=True*, *merge_policy='ignore'*)

Rename categories with a potentially coarser categorization.

Parameters

- **mapper** (*dict* | *Callable*) – maps old names to new names. If multiple names are mapped to the same category, those categories will be merged.
- **merge_policy** (*str*) – How to handle multiple categories that map to the same name. Can be update or ignore.

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> self.rename_categories({'astronomer': 'person',
>>>                         'astronaut': 'person',
>>>                         'mouth': 'person',
>>>                         'helmet': 'hat'})
>>> assert 'hat' in self.name_to_cat
>>> assert 'helmet' not in self.name_to_cat
>>> # Test merge case
>>> self = kwcoco.CocoDataset.demo()
>>> mapper = {
>>>     'helmet': 'rocket',
>>>     'astronomer': 'rocket',
>>>     'human': 'rocket',
```

(continues on next page)

(continued from previous page)

```
>>>     'mouth': 'helmet',
>>>     'star': 'gas'
>>> }
>>> self.rename_categories(mapper)
```

_ensure_json_serializable()**_aspycoco()**

Converts to the official pycocotools.coco.COCO object

Todo:

- [] Maybe expose as a public API?
-

reroot(*new_root=None*, *old_prefix=None*, *new_prefix=None*, *absolute=False*, *check=True*, *safe=True*, *verbose=1*)

Modify the prefix of the image/data paths onto a new image/data root.

Parameters

- **new_root** (*str | PathLike | None*) – New image root. If unspecified the current `self.bundle_dpath` is used. If `old_prefix` and `new_prefix` are unspecified, they will attempt to be determined based on the current root (which assumes the file paths exist at that root) and this new root. Defaults to `None`.
- **old_prefix** (*str | None*) – If specified, removes this prefix from file names. This also prevents any inferences that might be made via “`new_root`”. Defaults to `None`.
- **new_prefix** (*str | None*) – If specified, adds this prefix to the file names. This also prevents any inferences that might be made via “`new_root`”. Defaults to `None`.
- **absolute** (*bool*) – if `True`, file names are stored as absolute paths, otherwise they are relative to the new image root. Defaults to `False`.
- **check** (*bool*) – if `True`, checks that the images all exist. Defaults to `True`.
- **safe** (*bool*) – if `True`, does not overwrite values until all checks pass. Defaults to `True`.
- **verbose** (*int*) – verbosity level, default=0.

CommandLine

```
xdoctest -m kwcoco.coco_dataset MixinCocoExtras.reroot
```

Todo:

- [] Incorporate maximum ordered subtree embedding?
-

Example

```
>>> # xdoctest: +REQUIRES(module:rich)
>>> import kwcoco
>>> import ubelt as ub
>>> import rich
>>> def report(dset):
>>>     gid = 1
>>>     abs_fpath = ub.Path(dset.get_image_fpath(gid))
>>>     rel_fpath = dset.index.imgs[gid]['file_name']
>>>     color = 'green' if abs_fpath.exists() else 'red'
>>>     print(ub.color_text(f'abs_fpath = {abs_fpath!r}', color))
>>>     print(f'rel_fpath = {rel_fpath!r}')
>>> dset = self = kwcoco.CocoDataset.demo()
>>> # Change base relative directory
>>> bundle_dpath = ub.expandpath('~')
>>> rich.print('ORIG self.imgs = {}'.format(ub.urepr(self.imgs, nl=1)))
>>> rich.print('ORIG dset.bundle_dpath = {!r}'.format(dset.bundle_dpath))
>>> rich.print('NEW(1) bundle_dpath      = {!r}'.format(bundle_dpath))
>>> # Test relative rerooot
>>> rich.print('[blue] --- 1. RELATIVE REROOT ---')
>>> self.reroot(bundle_dpath, verbose=3)
>>> report(self)
>>> rich.print('NEW(1) self.imgs = {}'.format(ub.urepr(self.imgs, nl=1)))
>>> if not ub.WIN32:
>>>     assert self.imgs[1]['file_name'].startswith('.cache')
>>> # Test absolute rerooot
>>> rich.print('[blue] --- 2. ABSOLUTE REROOT ---')
>>> self.reroot(absolute=True, verbose=3)
>>> rich.print('NEW(2) self.imgs = {}'.format(ub.urepr(self.imgs, nl=1)))
>>> assert self.imgs[1]['file_name'].startswith(bundle_dpath)
```

```
>>> # Switch back to relative paths
>>> rich.print('[blue] --- 3. ABS->REL REROOT ---')
>>> self.reroot()
>>> rich.print('NEW(3) self.imgs = {}'.format(ub.urepr(self.imgs, nl=1)))
>>> if not ub.WIN32:
>>>     assert self.imgs[1]['file_name'].startswith('.cache')
```

Example

```
>>> # demo with auxiliary data
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('shapes8', aux=True)
>>> bundle_dpath = ub.expandpath('~')
>>> print(self.imgs[1]['file_name'])
>>> print(self.imgs[1]['auxiliary'][0]['file_name'])
>>> self.reroot(new_root=bundle_dpath)
>>> print(self.imgs[1]['file_name'])
>>> print(self.imgs[1]['auxiliary'][0]['file_name'])
>>> if not ub.WIN32:
```

(continues on next page)

(continued from previous page)

```
>>>     assert self.imgs[1]['file_name'].startswith('.cache')
>>>     assert self.imgs[1]['auxiliary'][0]['file_name'].startswith('.cache')
```

property data_root

In the future we will deprecate data_root for bundle_dpath

property img_root

In the future we will deprecate img_root for bundle_dpath

property data_fpath

data_fpath is an alias of fpath

class kwcoco.coco_dataset.MixinCocoObjects

Bases: `object`

Expose methods to construct object lists / groups.

This is an alternative vectorized ORM-like interface to the coco dataset

annots(annot_ids=None, image_id=None, track_id=None, trackid=None, aids=None, gid=None)

Return vectorized annotation objects

Parameters

- **annot_ids** (`List[int] | None`) – annotation ids to reference, if unspecified all annotations are returned. An alias is “aids”, which may be removed in the future.
- **image_id** (`int | None`) – return all annotations that belong to this image id. Mutually exclusive with other arguments. An alias is “gids”, which may be removed in the future.
- **track_id** (`int | None`) – return all annotations that belong to this track. mutually exclusive with other arguments. An alias is “trackid”, which may be removed in the future.

Returns

vectorized annotation object

Return type

`kwcoco.coco_objects.Id.Annots`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> annots = self.annots()
>>> print(annots)
<Annots(num=11)>
>>> sub_annot = annots.take([1, 2, 3])
>>> print(sub_annot)
<Annots(num=3)>
>>> print(ub.urepr(sub_annot.get('bbox', None)))
[
    [350, 5, 130, 290],
    None,
    None,
]
```

images(*image_ids=None*, *video_id=None*, *names=None*, *gids=None*, *vidid=None*)

Return vectorized image objects

Parameters

- **image_ids** (*List[int]* | *None*) – image ids to reference, if unspecified all images are returned.
An alias is *gids*.
- **video_id** (*int* | *None*) – returns all images that belong to this video id. mutually exclusive with *image_ids* arg.
- **names** (*List[str]* | *None*) – lookup images by their names.

Returns

vectorized image object

Return type

kwcoco.coco_objects1d.Images

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> images = self.images()
>>> print(images)
<Images(num=3)>
```

```
>>> self = kwcoco.CocoDataset.demo('vidshapes2')
>>> video_id = 1
>>> images = self.images(video_id=video_id)
>>> assert all(v == video_id for v in images.lookup('video_id'))
>>> print(images)
<Images(num=2)>
```

categories(*category_ids=None*, *cids=None*)

Return vectorized category objects

Parameters

- category_ids** (*List[int]* | *None*) – category ids to reference, if unspecified all categories are returned. The *cids* argument is an alias.

Returns

vectorized category object

Return type

kwcoco.coco_objects1d.Categories

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> categories = self.categories()
>>> print(categories)
<Categories(num=8)>
```

videos(*video_ids=None, names=None, vidids=None*)

Return vectorized video objects

Parameters

- **video_ids** (*List[int] | None*) – video ids to reference, if unspecified all videos are returned.
The *vidids* argument is an alias. Mutually exclusive with other args.
- **names** (*List[str] | None*) – lookup videos by their name. Mutually exclusive with other args.

Returns

vectorized video object

Return type

kwcoco.coco_objects1d.Videos

Todo:

- [] **This conflicts with what should be the property that**
should redirect to `index.videos`, we should resolve this somehow. E.g. all other main members of the index (anns, imgs, cats) have a toplevel dataset property, we don't have one for videos because the name we would pick conflicts with this.
-

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('vidshapes2')
>>> videos = self.videos()
>>> print(videos)
>>> videos.lookup('name')
>>> videos.lookup('id')
>>> print('videos objs = {}'.format(ub.urepr(videos.objs[0:2], nl=1)))
```

tracks(*track_ids=None, names=None*)

Return vectorized track objects

Parameters

- **track_ids** (*List[int] | None*) – track ids to reference, if unspecified all tracks are returned.
- **names** (*List[str] | None*) – lookup tracks by their name. Mutually exclusive with other args.

Returns

vectorized track object

Return type

kwcoco.coco_objects1d.Tracks

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('vidshapes2')
>>> tracks = self.tracks()
>>> print(tracks)
>>> tracks.lookup('name')
>>> tracks.lookup('id')
>>> print('tracks objs = {}'.format(ub.urepr(tracks.objs[0:2], nl=1)))
```

`class kwcoco.coco_dataset.MixinCocoStats`

Bases: `object`

Methods for getting stats about the dataset

property n_annots

The number of annotations in the dataset

property n_images

The number of images in the dataset

property n_cats

The number of categories in the dataset

property n_tracks

The number of tracks in the dataset

property n_videos

The number of videos in the dataset

category_annotation_frequency()

Reports the number of annotations of each category

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> hist = self.category_annotation_frequency()
>>> print(ub.urepr(hist))
{
    'astroturf': 0,
    'human': 0,
    'astronaut': 1,
    'astronomer': 1,
    'helmet': 1,
    'rocket': 1,
    'mouth': 2,
    'star': 5,
}
```

conform(config)**

Make the COCO file conform a stricter spec, infers attributes where possible.

Corresponds to the `kwcoco conform` CLI tool.

KWArgs:****config :**

pycocotools_info (default=True): returns info required by pycocotools
ensure_imgsize (default=True): ensure image size is populated
mmlab (default=False): if True tries to convert data to be compatible with open-mmlab tooling.
legacy (default=False): if True tries to convert data structures to items compatible with the original pycocotools spec
workers (int): number of parallel jobs for IO tasks

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('shapes8')
>>> dset.index.imgs[1].pop('width')
>>> dset.conform(legacy=True)
>>> assert 'width' in dset.index.imgs[1]
>>> assert 'area' in dset.index.anns[1]
```

validate(config)**

Performs checks on this coco dataset.

Corresponds to the kwcoco validate CLI tool.

Parameters

****config** – schema (default=True): if True, validate the json-schema
unique (default=True): if True, validate unique secondary keys
missing (default=True): if True, validate registered files exist
corrupted (default=False): if True, validate data in registered files
channels (default=True): if True, validate that channels in auxiliary/asset items are all unique.
require_relative (default=False): if True, causes validation to fail if paths are non-portable, i.e. all paths must be relative to the bundle directory. If >0, paths must be relative to bundle root. If >1, paths must be inside bundle root.
img_attrs (default='warn'): if truthy, check that image attributes contain width and height entries. If 'warn', then warn if they do not exist. If 'error', then fail.
verbose (default=1): verbosity flag
workers (int): number of workers for parallel checks. defaults to 0
fastfail (default=False): if True raise errors immediately

Returns**result containing keys -**

status (bool): False if any errors occurred errors (List[str]): list of all error messages missing (List): List of any missing images corrupted (List): List of any corrupted images

Return type

dict

SeeAlso:

`_check_integrity()` - performs internal checks

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> import pytest
>>> with pytest.warns(UserWarning):
>>>     result = self.validate()
>>> assert not result['errors']
>>> assert result['warnings']
```

stats(kwargs)**

Compute summary statistics to describe the dataset at a high level

This function corresponds to `kwcoco.cli.coco_stats`.

KWargs:

`basic(bool): return basic stats', default=True` `extended(bool): return extended stats', default=True` `cat-freq(bool): return category frequency stats', default=True` `boxes(bool): return bounding box stats', default=False`

`annot_attrs(bool): return annotation attribute information', default=True` `image_attrs(bool): return im-age attribute information', default=True`

Returns

`info`

Return type

`dict`

basic_stats()

Reports number of images, annotations, and categories.

SeeAlso:

`kwcoco.coco_dataset.MixinCocoStats.basic_stats()` `kwcoco.coco_dataset.MixinCocoStats.extended_stats()`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> print(ub.urepr(self.basic_stats()))
{
    'n_anns': 11,
    'n_imgs': 3,
    'n_videos': 0,
    'n_cats': 8,
    'n_tracks': 0,
}
```

```
>>> from kwCOCO.demo.toydata_video import random_video_dset
>>> dset = random_video_dset(render=True, num_frames=2, num_tracks=10, rng=0)
>>> print(ub.urepr(dset.basic_stats()))
{
    'n_anns': 20,
    'n_imgs': 2,
    'n_videos': 1,
    'n_cats': 3,
    'n_tracks': 10,
}
```

extended_stats()

Reports number of images, annotations, and categories.

SeeAlso:

`kwCOCO.coco_dataset.MixinCocoStats.basic_stats()` `kwCOCO.coco_dataset.MixinCocoStats.extended_stats()`

Example

```
>>> import kwCOCO
>>> self = kwCOCO.CocoDataset.demo()
>>> print(ub.urepr(self.extended_stats()))
```

`boxsize_stats(anchors=None, perclass=True, gids=None, aids=None, verbose=0, clusterkw={}, statskw={})`

Compute statistics about bounding box sizes.

Also computes anchor boxes using kmeans if `anchors` is specified.

Parameters

- `anchors` (`int | None`) – if specified also computes box anchors via KMeans clustering
- `perclass` (`bool`) – if True also computes stats for each category
- `gids` (`List[int] | None`) – if specified only compute stats for these image ids. Defaults to `None`.
- `aids` (`List[int] | None`) – if specified only compute stats for these annotation ids. Defaults to `None`.
- `verbose` (`int`) – verbosity level
- `clusterkw` (`dict`) – kwargs for `sklearn.cluster.KMeans` used if computing anchors.
- `statskw` (`dict`) – kwargs for `kwarray.stats_dict()`

Returns

Stats are returned in width-height format.

Return type

`Dict[str, Dict[str, Dict | ndarray]]`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('shapes32')
>>> infos = self.boxsize_stats(anchors=4, perclass=False)
>>> print(ub.urepr(infos, nl=-1, precision=2))
```

```
>>> infos = self.boxsize_stats(gids=[1], statskw=dict(median=True))
>>> print(ub.urepr(infos, nl=-1, precision=2))
```

`find_representative_images(gids=None)`

Find images that have a wide array of categories.

Attempt to find the fewest images that cover all categories using images that contain both a large and small number of annotations.

Parameters

`gids (None | List)` – Subset of image ids to consider when finding representative images. Uses all images if unspecified.

Returns

list of image ids determined to be representative

Return type

List

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> gids = self.find_representative_images()
>>> print('gids = {!r}'.format(gids))
>>> gids = self.find_representative_images([3])
>>> print('gids = {!r}'.format(gids))
```

```
>>> self = kwcoco.CocoDataset.demo('shapes8')
>>> gids = self.find_representative_images()
>>> print('gids = {!r}'.format(gids))
>>> valid = {7, 1}
>>> gids = self.find_representative_images(valid)
>>> assert valid.issuperset(gids)
>>> print('gids = {!r}'.format(gids))
```

`class kwcoco.coco_dataset.MixinCocoDraw`

Bases: `object`

Matplotlib / display functionality

`draw_image(gid, channels=None)`

Use kwimage to draw all annotations on an image and return the pixels as a numpy array.

Parameters

- `gid (int)` – image id to draw
- `channels (kwcoco.ChannelSpec)` – the channel to draw on

Returns

canvas

Return type

ndarray

SeeAlso

`kwcoco.coco_dataset.MixinCocoDraw.draw_image()`

`kwcoco.coco_dataset.`

`MixinCocoDraw.show_image()`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('shapes8')
>>> self.draw_image(1)
>>> # Now you can dump the annotated image to disk / whatever
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()l()
>>> kwplot.imshow(canvas)
```

show_image(*gid=None*, *aids=None*, *aid=None*, *channels=None*, *setlim=None*, ***kwargs*)

Use matplotlib to show an image with annotations overlaid

Parameters

- **gid** (*int | None*) – image id to show
- **aids** (*list | None*) – aids to highlight within the image
- **aid** (*int | None*) – a specific aid to focus on. If gid is not give, look up gid based on this aid.
- **setlim** (*None | str*) – if ‘image’ sets the limit to the image extent
- ****kwargs** – show_annot, show_aid, show_catname, show_kpname, show_segmentation, title, show_gid, show_filename, show_boxes,

SeeAlso

`kwcoco.coco_dataset.MixinCocoDraw.draw_image()`

`kwcoco.coco_dataset.`


`MixinCocoDraw.show_image()`

CommandLine

```
xdoctest -m kwcoco.coco_dataset MixinCocoDraw.show_image --show
```

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-msi')
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()
>>> # xdoctest: -REQUIRES(--show)
>>> dset.show_image(gid=1, channels='B8')
>>> # xdoctest: +REQUIRES(--show)
>>> kwplot.show_if_requested()
```

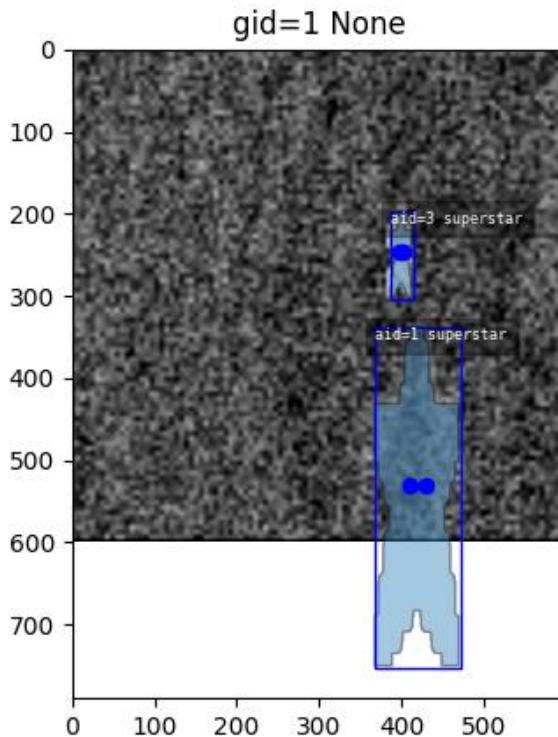

`kwcoco.coco_dataset._normalize_intensity_if_needed(canvas)`

`class kwcoco.coco_dataset.MixinCocoAddRemove`

Bases: `object`

Mixin functions to dynamically add / remove annotations images and categories while maintaining lookup indexes.

`add_video(name, id=None, **kw)`

Register a new video with the dataset

Parameters

- `name (str)` – Unique name for this video.
- `id (None | int)` – ADVANCED. Force using this image id.

- ****kw** – stores arbitrary key/value pairs in this new video

Returns

the video id assigned to the new video

Return type

int

Example

```
>>> import kwococo
>>> self = kwococo.CocoDataset()
>>> print('self.index.videos = {}'.format(ub.urepr(self.index.videos, nl=1)))
>>> print('self.index.imgs = {}'.format(ub.urepr(self.index.imgs, nl=1)))
>>> print('self.index.vidid_to_gids = {!r}'.format(self.index.vidid_to_gids))
```

```
>>> vidid1 = self.add_video('foo', id=3)
>>> vidid2 = self.add_video('bar')
>>> vidid3 = self.add_video('baz')
>>> print('self.index.videos = {}'.format(ub.urepr(self.index.videos, nl=1)))
>>> print('self.index.imgs = {}'.format(ub.urepr(self.index.imgs, nl=1)))
>>> print('self.index.vidid_to_gids = {!r}'.format(self.index.vidid_to_gids))
```

```
>>> gid1 = self.add_image('foo1.jpg', video_id=vidid1, frame_index=0)
>>> gid2 = self.add_image('foo2.jpg', video_id=vidid1, frame_index=1)
>>> gid3 = self.add_image('foo3.jpg', video_id=vidid1, frame_index=2)
>>> gid4 = self.add_image('bar1.jpg', video_id=vidid2, frame_index=0)
>>> print('self.index.videos = {}'.format(ub.urepr(self.index.videos, nl=1)))
>>> print('self.index.imgs = {}'.format(ub.urepr(self.index.imgs, nl=1)))
>>> print('self.index.vidid_to_gids = {!r}'.format(self.index.vidid_to_gids))
```

```
>>> self.remove_images([gid2])
>>> print('self.index.vidid_to_gids = {!r}'.format(self.index.vidid_to_gids))
```

add_image(file_name=None, id=None, **kw)

Register a new image with the dataset

Parameters

- **file_name** (*str* | *None*) – relative or absolute path to image. if not given, then “name” must be specified and we will expect that “auxiliary” assets are eventually added.
- **id** (*None* | *int*) – ADVANCED. Force using this image id.
- **name** (*str*) – a unique key to identify this image
- **width** (*int*) – base width of the image
- **height** (*int*) – base height of the image
- **channels** (*ChannelSpec*) – specification of base channels. Only relevant if file_name is given.
- **auxiliary** (*List[Dict]*) – specification of auxiliary assets. See `CocoImage.add_asset()` for details
- **video_id** (*int*) – id of parent video, if applicable

- **frame_index** (*int*) – frame index in parent video
- **timestamp** (*number | str*) – timestamp of frame index
- **warp_img_to_vid** (*Dict*) – this transform is used to align the image to a video if it belongs to one.
- ****kw** – stores arbitrary key/value pairs in this new image

Returns

the image id assigned to the new image

Return type

int

SeeAlso:

[add_image\(\)](#) [add_images\(\)](#) [ensure_image\(\)](#)

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> import kwimage
>>> gname = kwimage.grab_test_image_fpath('paraview')
>>> gid = self.add_image(gname)
>>> assert self.imgs[gid]['file_name'] == gname
```

add_asset(*gid, file_name=None, channels=None, **kwargs*)

Adds an auxiliary / asset item to the image dictionary.

Parameters

- **gid** (*int*) – The image id to add the auxiliary/asset item to.
- **file_name** (*str | None*) – The name of the file relative to the bundle directory. If unspecified, imdata must be given.
- **channels** (*str | kwcoco.FusedChannelSpec*) – The channel code indicating what each of the bands represents. These channels should be disjoint wrt to the existing data in this image (this is not checked).
- ****kwargs** – See `CocoImage.add_asset()` for more details

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset()
>>> gid = dset.add_image(name='my_image_name', width=200, height=200)
>>> dset.add_asset(gid, 'path/fake_B0.tif', channels='B0', width=200,
>>>                      height=200, warp_aux_to_img={'scale': 1.0})
```

add_auxiliary_item(*gid, file_name=None, channels=None, **kwargs*)

Adds an auxiliary / asset item to the image dictionary.

Parameters

- **gid** (*int*) – The image id to add the auxiliary/asset item to.

- **file_name** (*str | None*) – The name of the file relative to the bundle directory. If unspecified, imdata must be given.
- **channels** (*str | kwcoco.FusedChannelSpec*) – The channel code indicating what each of the bands represents. These channels should be disjoint wrt to the existing data in this image (this is not checked).
- ****kwargs** – See `CocoImage.add_asset()` for more details

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset()
>>> gid = dset.add_image(name='my_image_name', width=200, height=200)
>>> dset.add_asset(gid, 'path/fake_B0.tif', channels='B0', width=200,
>>>                               height=200, warp_aux_to_img={'scale': 1.0})
```

`add_annotation(image_id, category_id=None, bbox=NoParam, segmentation=NoParam,
keypoints=NoParam, id=None, track_id=None, **kw)`

Register a new annotation with the dataset

Parameters

- **image_id** (*int*) – image_id the annotation is added to.
- **category_id** (*int | None*) – category_id for the new annotation
- **bbox** (*list | kwimage.Boxes*) – bounding box in xywh format
- **segmentation** (*Dict | List | Any*) – keypoints in some accepted format, see `kwimage.Mask.to_coco()` and `kwimage.MultiPolygon.to_coco()`. Extended types: *MaskLike | MultiPolygonLike*.
- **keypoints** (*Any*) – keypoints in some accepted format, see `kwimage.Keypoints.to_coco()`. Extended types: *KeypointsLike*.
- **id** (*None | int*) – Force using this annotation id. Typically you should NOT specify this. A new unused id will be chosen and returned.
- **track_id** (*int | str | None*) – Some value used to associate annotations that belong to the same “track”. In the future we may remove support for strings.
- ****kw** – stores arbitrary key/value pairs in this new image, Common respected key/values include but are not limited to the following: score : float prob : List[float] weight (float): a weight, usually used to indicate if a ground truth annotation is difficult / important. This generalizes standard “is_hard” or “ignore” attributes in other formats. caption (str): a text caption for this annotation

Returns

the annotation id assigned to the new annotation

Return type

`int`

SeeAlso:

`kwcoco.coco_dataset.MixinCocoAddRemove.add_annotation()` `kwcoco.coco_dataset.MixinCocoAddRemove.add_annotations()`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> image_id = 1
>>> cid = 1
>>> bbox = [10, 10, 20, 20]
>>> aid = self.add_annotation(image_id, cid, bbox)
>>> assert self.anns[aid]['bbox'] == bbox
```

Example

```
>>> import kwimage
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> new_det = kwimage.Detections.random(1, segmentations=True, keypoints=True)
>>> # kwimage datastructures have methods to convert to coco recognized formats
>>> new_ann_data = list(new_det.to_coco(style='new'))[0]
>>> image_id = 1
>>> aid = self.add_annotation(image_id, **new_ann_data)
>>> # Lookup the annotation we just added
>>> ann = self.index.anns[aid]
>>> print('ann = {}'.format(ub.urepr(ann, nl=-2)))
```

Example

```
>>> # Attempt to add annot without a category or bbox
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> image_id = 1
>>> aid = self.add_annotation(image_id)
>>> assert None in self.index.cid_to_aids
```

Example

```
>>> # Attempt to add annot using various styles of kwimage structures
>>> import kwcoco
>>> import kwimage
>>> self = kwcoco.CocoDataset.demo()
>>> image_id = 1
>>> #--
>>> kw = {}
>>> kw['segmentation'] = kwimage.Polygon.random()
>>> kw['keypoints'] = kwimage.Points.random()
>>> aid = self.add_annotation(image_id, **kw)
>>> ann = self.index.anns[aid]
>>> print('ann = {}'.format(ub.urepr(ann, nl=2)))
>>> #--
```

(continues on next page)

(continued from previous page)

```
>>> kw = {}
>>> kw['segmentation'] = kwimage.Mask.random()
>>> aid = self.add_annotation(image_id, **kw)
>>> ann = self.index.anns[aid]
>>> assert ann.get('segmentation', None) is not None
>>> print('ann = {}'.format(ub.urepr(ann, nl=2)))
>>> #--
>>> kw = {}
>>> kw['segmentation'] = kwimage.Mask.random().to_array_rle()
>>> aid = self.add_annotation(image_id, **kw)
>>> ann = self.index.anns[aid]
>>> assert ann.get('segmentation', None) is not None
>>> print('ann = {}'.format(ub.urepr(ann, nl=2)))
>>> #--
>>> kw = {}
>>> kw['segmentation'] = kwimage.Polygon.random().to_coco()
>>> kw['keypoints'] = kwimage.Points.random().to_coco()
>>> aid = self.add_annotation(image_id, **kw)
>>> ann = self.index.anns[aid]
>>> assert ann.get('segmentation', None) is not None
>>> assert ann.get('keypoints', None) is not None
>>> print('ann = {}'.format(ub.urepr(ann, nl=2)))
```

add_category(*name*, *supercategory=None*, *id=None*, ***kw*)

Register a new category with the dataset

Parameters

- **name** (*str*) – name of the new category
- **supercategory** (*str | None*) – parent of this category
- **id** (*int | None*) – use this category id, if it was not taken
- ****kw** – stores arbitrary key/value pairs in this new image

Returns

the category id assigned to the new category

Return type

int

SeeAlso:

`kwcoco.coco_dataset.MixinCocoAddRemove.add_category()` `kwcoco.coco_dataset.MixinCocoAddRemove.ensure_category()`

Example

```
>>> import kwCOCO
>>> self = kwCOCO.CocoDataset.demo()
>>> prev_n_cats = self.n_cats
>>> cid = self.add_category('dog', supercategory='object')
>>> assert self.cats[cid]['name'] == 'dog'
>>> assert self.n_cats == prev_n_cats + 1
>>> import pytest
>>> with pytest.raises(ValueError):
>>>     self.add_category('dog', supercategory='object')
```

add_track(*name*, *id=None*, ***kw*)

Register a new track with the dataset

Parameters

- **name** (*str*) – name of the new track
- **id** (*int | None*) – use this track id, if it was not taken
- ****kw** – stores arbitrary key/value pairs in this new image

Returns

the track id assigned to the new track

Return type

int

Example

```
>>> import kwCOCO
>>> self = kwCOCO.CocoDataset.demo()
>>> prev_n_tracks = self.n_tracks
>>> track_id = self.add_track('dog')
>>> assert self.index.tracks[track_id]['name'] == 'dog'
>>> assert self.n_tracks == prev_n_tracks + 1
>>> import pytest
>>> with pytest.raises(ValueError):
>>>     self.add_track('dog')
```

ensure_image(*file_name*, *id=None*, ***kw*)

Register an image if it is new or returns an existing id.

Like `kwCOCO.coco_dataset.MixinCocoAddRemove.add_image()`, but returns the existing image id if it already exists instead of failing. In this case all metadata is ignored.

Parameters

- **file_name** (*str*) – relative or absolute path to image
- **id** (*None | int*) – ADVANCED. Force using this image id.
- ****kw** – stores arbitrary key/value pairs in this new image

Returns

the existing or new image id

Return type

int

SeeAlso:

`kwcoco.coco_dataset.MixinCocoAddRemove.add_image()` `kwcoco.coco_dataset.MixinCocoAddRemove.add_images()` `kwcoco.coco_dataset.MixinCocoAddRemove.ensure_image()`

ensure_category(name, supercategory=None, id=None, **kw)

Register a category if it is new or returns an existing id.

Like `kwcoco.coco_dataset.MixinCocoAddRemove.add_category()`, but returns the existing category id if it already exists instead of failing. In this case all metadata is ignored.

Returns

the existing or new category id

Return type

int

SeeAlso:

`kwcoco.coco_dataset.MixinCocoAddRemove.add_category()` `kwcoco.coco_dataset.MixinCocoAddRemove.ensure_category()`

add_annotations(annts)

Faster less-safe multi-item alternative to add_annotation.

We assume the annotations are well formatted in kwcoco compliant dictionaries, including the “id” field. No validation checks are made when calling this function.

Parameters

`annts (List[Dict])` – list of annotation dictionaries

SeeAlso:

`add_annotation()` `add_annotations()`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> annts = [self.anns[aid] for aid in [2, 3, 5, 7]]
>>> self.remove_annotations(annts)
>>> assert self.n_annot == 7 and self._check_integrity()
>>> self.add_annotations(annts)
>>> assert self.n_annot == 11 and self._check_integrity()
```

add_images(imgs)

Faster less-safe multi-item alternative

We assume the images are well formatted in kwcoco compliant dictionaries, including the “id” field. No validation checks are made when calling this function.

Note: THIS FUNCTION WAS DESIGNED FOR SPEED, AS SUCH IT DOES NOT CHECK IF THE IMAGE-IDs or FILE_NAMES ARE DUPLICATED AND WILL BLINDLY ADD DATA EVEN IF IT IS

BAD. THE SINGLE IMAGE VERSION IS SLOWER BUT SAFER.

Parameters**imgs** (*List[Dict]*) – list of image dictionaries**SeeAlso:**

kwcoco.coco_dataset.MixinCocoAddRemove.add_image() *kwcoco.coco_dataset.MixinCocoAddRemove.add_images()* *kwcoco.coco_dataset.MixinCocoAddRemove.ensure_image()*

Example

```
>>> import kwcoco
>>> imgs = kwcoco.CocoDataset.demo().dataset['images']
>>> self = kwcoco.CocoDataset()
>>> self.add_images(imgs)
>>> assert self.n_images == 3 and self._check_integrity()
```

clear_images()

Removes all images and annotations (but not categories)

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> self.clear_images()
>>> print(ub.urepr(self.basic_stats(), nobr=1, nl=0, si=1))
n_anns: 0, n_imgs: 0, n_videos: 0, n_cats: 8, n_tracks: 0
```

clear_annotations()

Removes all annotations and tracks (but not images and categories)

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> self.clear_annotations()
>>> print(ub.urepr(self.basic_stats(), nobr=1, nl=0, si=1))
n_anns: 0, n_imgs: 3, n_videos: 0, n_cats: 8, n_tracks: 0
```

remove_annotation(*aid_or_ann*)

Remove a single annotation from the dataset

If you have multiple annotations to remove its more efficient to remove them in batch with *kwcoco.coco_dataset.MixinCocoAddRemove.remove_annotations()*

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> aids_or_anns = [self.anns[2], 3, 4, self.anns[1]]
>>> self.remove_annotations(aids_or_anns)
>>> assert len(self.dataset['annotations']) == 7
>>> self._check_integrity()
```

remove_annotations(*aids_or_anns*, *verbose*=0, *safe*=True)

Remove multiple annotations from the dataset.

Parameters

- **anns_or_aids** (*List*) – list of annotation dicts or ids
- **safe** (*bool*) – if True, we perform checks to remove duplicates and non-existing identifiers.
Defaults to True.

Returns

num_removed: information on the number of items removed

Return type

Dict

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> prev_n_annotss = self.n_annotss
>>> aids_or_anns = [self.anns[2], 3, 4, self.anns[1]]
>>> self.remove_annotations(aids_or_anns) # xdoc: +IGNORE_WANT
{'annotations': 4}
>>> assert len(self.dataset['annotations']) == prev_n_annotss - 4
>>> self._check_integrity()
```

remove_categories(*cat_identifiers*, *keep_annotss*=False, *verbose*=0, *safe*=True)

Remove categories and all annotations in those categories.

Currently does not change any hierarchy information

Parameters

- **cat_identifiers** (*List*) – list of category dicts, names, or ids
- **keep_annotss** (*bool*) – if True, keeps annotations, but removes category labels. Defaults to False.
- **safe** (*bool*) – if True, we perform checks to remove duplicates and non-existing identifiers.
Defaults to True.

Returns

num_removed: information on the number of items removed

Return type

Dict

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> cat_identifiers = [self.cats[1], 'rocket', 3]
>>> self.remove_categories(cat_identifiers)
>>> assert len(self.dataset['categories']) == 5
>>> self._check_integrity()
```

remove_tracks(*track_identifiers*, *keep_anno*=*False*, *verbose*=0, *safe*=*True*)

Remove tracks and all annotations in those tracks.

Parameters

- **track_identifiers** (*List*) – list of track dicts, names, or ids
- **keep_anno** (*bool*) – if True, keeps annotations, but removes tracks labels. Defaults to False.
- **safe** (*bool*) – if True, we perform checks to remove duplicates and non-existing identifiers. Defaults to True.

Returns

num_removed: information on the number of items removed

Return type

Dict

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('vidshapes1')
>>> for ann in self.dataset['annotations']:
...     ann.pop('segmentation')
...     ann.pop('keypoints')
>>> print('self.dataset = {}'.format(ub.repr(self.dataset, nl=2)))
>>> track_identifiers = [2]
>>> assert len(self.dataset['tracks']) == 2
>>> self.remove_tracks(track_identifiers)
>>> print('self.dataset = {}'.format(ub.repr(self.dataset, nl=2)))
>>> assert len(self.dataset['tracks']) == 1
>>> self._check_integrity()
```

remove_images(*gids_or_imgs*, *verbose*=0, *safe*=*True*)

Remove images and any annotations contained by them

Parameters

- **gids_or_imgs** (*List*) – list of image dicts, names, or ids
- **safe** (*bool*) – if True, we perform checks to remove duplicates and non-existing identifiers.

Returns

num_removed: information on the number of items removed

Return type

Dict

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> assert len(self.dataset['images']) == 3
>>> gids_or_imgs = [self.imgs[2], 'astro.png']
>>> self.remove_images(gids_or_imgs) # xdoc: +IGNORE_WANT
{'annotations': 11, 'images': 2}
>>> assert len(self.dataset['images']) == 1
>>> self._check_integrity()
>>> gids_or_imgs = [3]
>>> self.remove_images(gids_or_imgs)
>>> assert len(self.dataset['images']) == 0
>>> self._check_integrity()
```

remove_videos(*vidids_or_videos*, *verbose*=0, *safe*=True)

Remove videos and any images / annotations contained by them

Parameters

- **vidids_or_videos** (*List*) – list of video dicts, names, or ids
- **safe** (*bool*) – if True, we perform checks to remove duplicates and non-existing identifiers.

Returns

num_removed: information on the number of items removed

Return type

Dict

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('vidshapes8')
>>> assert len(self.dataset['videos']) == 8
>>> vidids_or_videos = [self.dataset['videos'][0]['id']]
>>> self.remove_videos(vidids_or_videos) # xdoc: +IGNORE_WANT
{'annotations': 4, 'images': 2, 'videos': 1}
>>> assert len(self.dataset['videos']) == 7
>>> self._check_integrity()
```

remove_annotation_keypoints(*kp_identifiers*)

Removes all keypoints with a particular category

Parameters

- **kp_identifiers** (*List*) – list of keypoint category dicts, names, or ids

Returns

num_removed: information on the number of items removed

Return type

Dict

remove_keypoint_categories(*kp_identifiers*)

Removes all keypoints of a particular category as well as all annotation keypoints with those ids.

Parameters

kp_identifiers (*List*) – list of keypoint category dicts, names, or ids

Returns

num_removed: information on the number of items removed

Return type

Dict

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('shapes', rng=0)
>>> kp_identifiers = ['left_eye', 'mid_tip']
>>> remove_info = self.remove_keypoint_categories(kp_identifiers)
>>> print('remove_info = {!r}'.format(remove_info))
>>> # FIXME: for whatever reason demodata generation is not determinstic when
    ~seeded
>>> # assert remove_info == {'keypoint_categories': 2, 'annotation_keypoints': 16,
    ~'reflection_ids': 1}
>>> assert self._resolve_to_kpcat('right_eye')['reflection_id'] is None
```

set_annotation_category(*aid_or_ann*, *cid_or_cat*)

Sets the category of a single annotation

Parameters

- **aid_or_ann** (*dict* | *int*) – annotation dict or id
- **cid_or_cat** (*dict* | *int*) – category dict or id

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> old_freq = self.category_annotation_frequency()
>>> aid_or_ann = aid = 2
>>> cid_or_cat = new_cid = self.ensure_category('kitten')
>>> self.set_annotation_category(aid, new_cid)
>>> new_freq = self.category_annotation_frequency()
>>> print('new_freq = {}'.format(ub.urepr(new_freq, nl=1)))
>>> print('old_freq = {}'.format(ub.urepr(old_freq, nl=1)))
>>> assert sum(new_freq.values()) == sum(old_freq.values())
>>> assert new_freq['kitten'] == 1
```

class kwcoco.coco_dataset.CocoIndex

Bases: *object*

Fast lookup index for the COCO dataset with dynamic modification

Variables

- **imgs** (*Dict[int, dict]*) – mapping between image ids and the image dictionaries
- **anns** (*Dict[int, dict]*) – mapping between annotation ids and the annotation dictionaries

- **cats** (*Dict[int, dict]*) – mapping between category ids and the category dictionaries
- **tracks** (*Dict[int, dict]*) – mapping between track ids and the track dictionaries
- **kpcats** (*Dict[int, dict]*) – mapping between keypoint category ids and keypoint category dictionaries
- **gid_to_aids** (*Dict[int, List[int]]*) – mapping between an image-id and annotation-ids that belong to it
- **cid_to_aids** (*Dict[int, List[int]]*) – mapping between an category-id and annotation-ids that belong to it
- **cid_to_gids** (*Dict[int, List[int]]*) – mapping between an category-id and image-ids that contain at least one annotation with this category id.
- **trackid_to_aids** (*Dict[int, List[int]]*) – mapping between a track-id and annotation-ids that belong to it
- **vidid_to_gids** (*Dict[int, List[int]]*) – mapping between an video-id and image-ids that belong to it
- **name_to_video** (*Dict[str, dict]*) – mapping between a video name and the video dictionary.
- **name_to_cat** (*Dict[str, dict]*) – mapping between a category name and the category dictionary.
- **name_to_img** (*Dict[str, dict]*) – mapping between a image name and the image dictionary.
- **name_to_track** (*Dict[str, dict]*) – mapping between a track name and the track dictionary.
- **file_name_to_img** (*Dict[str, dict]*) – mapping between a image file_name and the image dictionary.

_set

alias of `set`

_images_set_sorted_by_frame_index(*gids=None*)

Helper for ensuring that `vidid_to_gids` returns image ids ordered by frame index.

_set_sorted_by_frame_index(*gids=None*)

Helper for ensuring that `vidid_to_gids` returns image ids ordered by frame index.

_annots_set_sorted_by_frame_index(*aids=None*)

Helper for ensuring that `vidid_to_gids` returns image ids ordered by frame index.

property cid_to_gids

Example:

```
>>> import kwcoco
>>> self = dset = kwcoco.CocoDataset()
>>> self.index.cid_to_gids
```

_add_video(*vidid, video*)**_add_image**(*gid, img*)

Example

```
>>> # Test adding image to video that doesn't exist
>>> import kwcoco
>>> self = dset = kwcoco.CocoDataset()
>>> dset.add_image(file_name='frame1', video_id=1, frame_index=0)
>>> dset.add_image(file_name='frame2', video_id=1, frame_index=0)
>>> dset._check_integrity()
>>> print('dset.index.vidid_to_gids = {!r}'.format(dset.index.vidid_to_gids))
>>> assert len(dset.index.vidid_to_gids) == 1
>>> dset.add_video(name='foo-vid', id=1)
>>> assert len(dset.index.vidid_to_gids) == 1
>>> dset._check_integrity()
```

`_add_images(imgs)`

See `./dev/bench/bench_add_image_check.py`

Note: THIS FUNCTION WAS DESIGNED FOR SPEED, AS SUCH IT DOES NOT CHECK IF THE IMAGE-IDS or FILE NAMES ARE DUPLICATED AND WILL BLINDLY ADD DATA EVEN IF IT IS BAD. THE SINGLE IMAGE VERSION IS SLOWER BUT SAFER.

`_add_annotation(aid, gid, cid, tid, ann)`

`_add_annotations(anns)`

`_add_category(cid, name, cat)`

`_add_track(trackid, name, track)`

`_remove_all_annotations()`

`_remove_all_images()`

`_remove_annotations(remove_aids, verbose=0)`

`_remove_tracks(remove_trackids, verbose=0)`

`_remove_categories(remove_cids, verbose=0)`

`_remove_images(remove_gids, verbose=0)`

`_remove_videos(remove_vidids, verbose=0)`

`clear()`

`build(parent)`

Build all id-to-obj reverse indexes from scratch.

Parameters

`parent (kwcoco.CocoDataset)` – the dataset to index

Notation:

aid - Annotation ID
gid - image ID
cid - Category ID
vidid - Video ID
tid - Track ID

Example

```
>>> import kwcoco
>>> parent = kwcoco.CocoDataset.demo('vidshapes1', num_frames=4, rng=1)
>>> index = parent.index
>>> index.build(parent)
```

```
class kwcoco.coco_dataset.MixinCocoIndex
```

Bases: `object`

Give the dataset top level access to index attributes

```
property anns
```

```
property imgs
```

```
property cats
```

```
property gid_to_aids
```

```
property cid_to_aids
```

```
property name_to_cat
```

```
class kwcoco.coco_dataset.CocoDataset(data=None, tag=None, bundle_dpath=None, img_root=None,
                                         fname=None, autobuild=True)
```

Bases: `AbstractCocoDataset`, `MixinCocoAddRemove`, `MixinCocoStats`, `MixinCocoObjects`, `MixinCocoDraw`, `MixinCocoAccessors`, `MixinCocoExtras`, `MixinCocoIndex`, `MixinCocoDeprivate`, `NiceRepr`

The main coco dataset class with a json dataset backend.

Variables

- **dataset** (`Dict`) – raw json data structure. This is the base dictionary that contains {‘annotations’: List, ‘images’: List, ‘categories’: List}
- **index** (`CocoIndex`) – an efficient lookup index into the coco data structure. The index defines its own attributes like `anns`, `cats`, `imgs`, `gid_to_aids`, `file_name_to_img`, etc. See `CocoIndex` for more details on which attributes are available.
- **fpath** (`PathLike` / `None`) – if known, this stores the filepath the dataset was loaded from
- **tag** (`str` / `None`) – A tag indicating the name of the dataset.
- **bundle_dpath** (`PathLike` / `None`) – If known, this is the root path that all image file names are relative to. This can also be manually overwritten by the user.
- **hashid** (`str` / `None`) – If computed, this will be a hash uniquely identifying the dataset. To ensure this is computed see `kwcoco.coco_dataset.MixinCocoExtras._build_hashid()`.

References

<http://cocodataset.org/#format> <http://cocodataset.org/#download>

CommandLine

```
python -m kwCOCO.coco_dataset CocoDataset --show
```


Example

```
>>> from kwCOCO.coco_dataset import demo_coco_data
>>> import kwCOCO
>>> import ubelt as ub
>>> # Returns a coco json structure
>>> dataset = demo_coco_data()
>>> # Pass the coco json structure to the API
>>> self = kwCOCO.CocoDataset(dataset, tag='demo')
>>> # Now you can access the data using the index and helper methods
>>> #
>>> # Start by looking up an image by its COCO id.
>>> image_id = 1
>>> img = self.index.imgs[image_id]
>>> print(ub.urepr(img, nl=1, sort=1))
{
    'file_name': 'astro.png',
    'id': 1,
    'url': 'https://i.imgur.com/KXhKM72.png',
}
>>> #
>>> # Use the (gid_to_aids) index to lookup annotations in the image
>>> annotation_id = sorted(self.index.gid_to_aids[image_id])[0]
>>> ann = self.index.anns[annotation_id]
>>> print(ub.urepr((ub.udict(ann) - {'segmentation'}).sorted_keys(), nl=1))
{
    'bbox': [10, 10, 360, 490],
    'category_id': 1,
    'id': 1,
    'image_id': 1,
    'keypoints': [247, 101, 2, 202, 100, 2],
}
>>> #
>>> # Use annotation category id to look up that information
>>> category_id = ann['category_id']
>>> cat = self.index.cats[category_id]
>>> print('cat = {}'.format(ub.urepr(cat, nl=1, sort=1)))
cat = {
    'id': 1,
    'name': 'astronaut',
    'supercategory': 'human',
}
>>> #
```

(continues on next page)

(continued from previous page)

```
>>> # Now play with some helper functions, like extended statistics
>>> extended_stats = self.extended_stats()
>>> # xdoctest: +IGNORE_WANT
>>> print('extended_stats = {}'.format(ub.urepr(extended_stats, nl=1, precision=2,
... sort=1)))
extended_stats = {
    'annots_per_img': {'mean': 3.67, 'std': 3.86, 'min': 0.00, 'max': 9.00, 'nMin': 1,
    'nMax': 1, 'shape': (3,)},
    'imgs_per_cat': {'mean': 0.88, 'std': 0.60, 'min': 0.00, 'max': 2.00, 'nMin': 2,
    'nMax': 1, 'shape': (8,)},
    'cats_per_img': {'mean': 2.33, 'std': 2.05, 'min': 0.00, 'max': 5.00, 'nMin': 1,
    'nMax': 1, 'shape': (3,)},
    'annots_per_cat': {'mean': 1.38, 'std': 1.49, 'min': 0.00, 'max': 5.00, 'nMin': 2,
    'nMax': 1, 'shape': (8,)},
    'imgs_per_video': {'empty_list': True},
}
>>> # You can "draw" a raster of the annotated image with cv2
>>> canvas = self.draw_image(2)
>>> # Or if you have matplotlib you can "show" the image with mpl objects
>>> # xdoctest: +REQUIRES(--show)
>>> from matplotlib import pyplot as plt
>>> fig = plt.figure()
>>> ax1 = fig.add_subplot(1, 2, 1)
>>> self.show_image(gid=2)
>>> ax2 = fig.add_subplot(1, 2, 2)
>>> ax2.imshow(canvas)
>>> ax1.set_title('show with matplotlib')
>>> ax2.set_title('draw with cv2')
>>> plt.show()
```

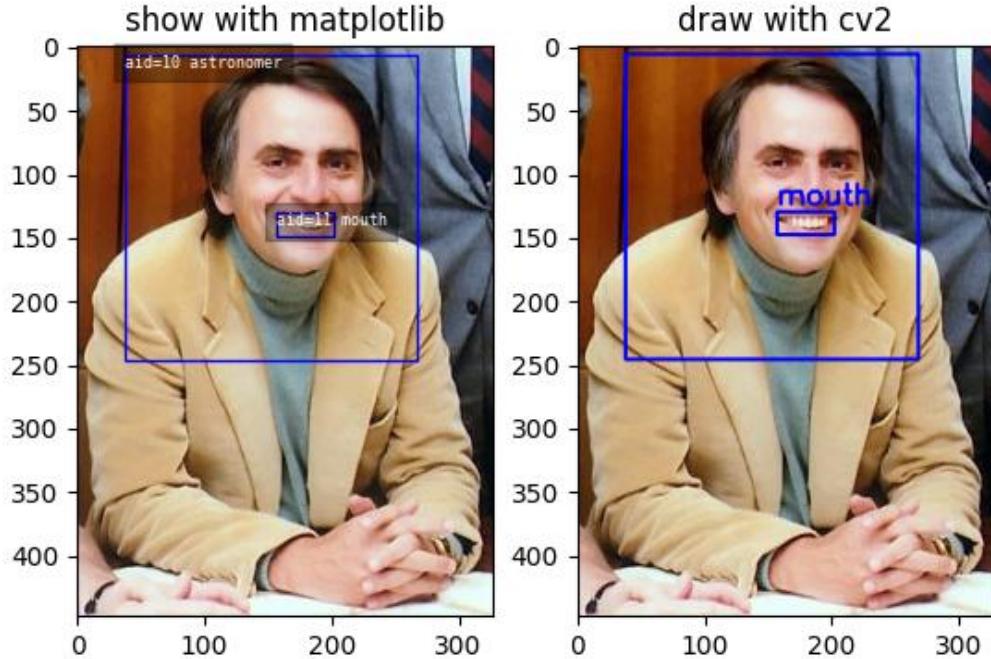

Parameters

- **data** (*str* | *PathLike* | *dict* | *None*) – Either a filepath to a coco json file, or a dictionary containing the actual coco json structure. For a more generally coercable constructor see func:*CocoDataset.coerce*.
- **tag** (*str* | *None*) – Name of the dataset for display purposes, and does not influence behavior of the underlying data structure, although it may be used via convinience methods. We attempt to autopopulate this via information in *data* if available. If unspecified and *data* is a filepath this becomes the basename.
- **bundle_dpath** (*str* | *None*) – the root of the dataset that images / external data will be assumed to be relative to. If unspecified, we attempt to determine it using information in *data*. If *data* is a filepath, we use the dirname of that path. If *data* is a dictionary, we look for the “img_root” key. If unspecified and we fail to introspect then, we fallback to the current working directory.
- **img_root** (*str* | *None*) – deprecated alias for *bundle_dpath*

property fpath

In the future we will deprecate *img_root* for *bundle_dpath*

_update_fpath(*new_fpath*)

_infer_dirs()

classmethod from_data(*data*, *bundle_dpath=None*, *img_root=None*)

Constructor from a json dictionary

```
classmethod from_image_paths(gpaths, bundle_dpath=None, img_root=None)
```

Constructor from a list of images paths.

This is a convinience method.

Parameters

`gpaths` (*List[str]*) – list of image paths

Example

```
>>> import kwcoco
>>> coco_dset = kwcoco.CocoDataset.from_image_paths(['a.png', 'b.png'])
>>> assert coco_dset.n_images == 2
```

```
classmethod coerce_multiple(datas, workers=0, mode='process', verbose=1, postprocess=None,
                           ordered=True, **kwargs)
```

Coerce multiple CocoDataset objects in parallel.

Parameters

- `datas` (*List*) – list of kwcoco coercables to load
- `workers` (*int | str*) – number of worker threads / processes. Can also accept coercable workers.
- `mode` (*str*) – thread, process, or serial. Defaults to process.
- `verbose` (*int*) – verbosity level
- `postprocess` (*Callable | None*) – A function taking one arg (the loaded dataset) to run on the loaded kwcoco dataset in background workers. This can be more efficient when postprocessing is independent per kwcoco file.
- `ordered` (*bool*) – if True yields datasets in the same order as given. Otherwise results are yielded as they become available. Defaults to True.
- `**kwargs` – arguments passed to the constructor

Yields

CocoDataset

SeeAlso:

- `load_multiple` - like this function but is a strict file-path-only loader

CommandLine

```
xdoctest -m kwcoco.coco_dataset CocoDataset.coerce_multiple
```

Example

```
>>> import kwcoco
>>> dset1 = kwcoco.CocoDataset.demo('shapes1')
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> dset3 = kwcoco.CocoDataset.demo('vidshapes8')
>>> dsets = [dset1, dset2, dset3]
>>> input_fpaths = [d.fpath for d in dsets]
>>> results = list(kwcoco.CocoDataset.coerce_multiple(input_fpaths,
... ~ordered=True))
>>> result_fpaths = [r.fpath for r in results]
>>> assert result_fpaths == input_fpaths
>>> # Test unordered
>>> results1 = list(kwcoco.CocoDataset.coerce_multiple(input_fpaths,
... ~ordered=False))
>>> result_fpaths = [r.fpath for r in results]
>>> assert set(result_fpaths) == set(input_fpaths)
>>> #
>>> # Coerce from existing datasets
>>> results2 = list(kwcoco.CocoDataset.coerce_multiple(dsets, ordered=True,
... ~workers=0))
>>> assert results2[0] is dsets[0]
```

classmethod `load_multiple`(*fpaths*, *workers*=0, *mode*='process', *verbose*=1, *postprocess*=None, *ordered*=True, ***kwargs*)

Load multiple CocoDataset objects in parallel.

Parameters

- **fpaths** (*List[str | PathLike]*) – list of paths to multiple coco files to be loaded
- **workers** (*int*) – number of worker threads / processes
- **mode** (*str*) – thread, process, or serial. Defaults to process.
- **verbose** (*int*) – verbosity level
- **postprocess** (*Callable | None*) – A function taking one arg (the loaded dataset) to run on the loaded kwcoco dataset in background workers and returns the modified dataset. This can be more efficient when postprocessing is independent per kwcoco file.
- **ordered** (*bool*) – if True yields datasets in the same order as given. Otherwise results are yielded as they become available. Defaults to True.
- ****kwargs** – arguments passed to the constructor

Yields

CocoDataset

SeeAlso:

- **coerce_multiple** - like this function but accepts general coercable inputs.

classmethod `_load_multiple`(*_loader*, *inputs*, *workers*=0, *mode*='process', *verbose*=1, *postprocess*=None, *ordered*=True, ***kwargs*)

Shared logic for multiprocessing loaders.

SeeAlso:

- coerce_multiple
- load_multiple

classmethod from_coco_paths(*fpaths*, *max_workers*=0, *verbose*=1, *mode*='thread', *union*='try')

Constructor from multiple coco file paths.

Loads multiple coco datasets and unions the result

Note: if the union operation fails, the list of individually loaded files is returned instead.

Parameters

- **fpaths** (*List[str]*) – list of paths to multiple coco files to be loaded and unioned.
- **max_workers** (*int*) – number of worker threads / processes
- **verbose** (*int*) – verbosity level
- **mode** (*str*) – thread, process, or serial
- **union** (*str | bool*) – If True, unions the result datasets after loading. If False, just returns the result list. If ‘try’, then try to preform the union, but return the result list if it fails.
Default=’try’

Note: This may be deprecated. Use load_multiple or coerce_multiple and then manually perform the union.

copy()

Deep copies this object

Example

```
>>> import kwCOCO
>>> self = kwCOCO.CocoDataset.demo()
>>> new = self.copy()
>>> assert new.imgs[1] is new.dataset['images'][0]
>>> assert new.imgs[1] == self.dataset['images'][0]
>>> assert new.imgs[1] is not self.dataset['images'][0]
```

dumps(*indent=None*, *newlines=False*)

Writes the dataset out to the json format

Parameters

- **newlines** (*bool*) – if True, each annotation, image, category gets its own line
- **indent** (*int | str | None*) – indentation for the json file. See [json.dump\(\)](#) for details.
- **newlines** (*bool*) – if True, each annotation, image, category gets its own line.

Note:

Using newlines=True is similar to:

`print(ub.urepr(dset.dataset, nl=2, trailsep=False))` However, the above may not output valid json if it contains ndarrays.

Example

```
>>> import kwcoco
>>> import json
>>> self = kwcoco.CocoDataset.demo()
>>> text = self.dumps(newlines=True)
>>> print(text)
>>> self2 = kwcoco.CocoDataset(json.loads(text), tag='demo2')
>>> assert self2.dataset == self.dataset
>>> assert self2.dataset is not self.dataset
```

```
>>> text = self.dumps(newlines=True)
>>> print(text)
>>> self2 = kwcoco.CocoDataset(json.loads(text), tag='demo2')
>>> assert self2.dataset == self.dataset
>>> assert self2.dataset is not self.dataset
```

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.coerce('vidshapes1-msi-multisensor', verbose=3)
>>> self.remove_annotations(self.annots())
>>> text = self.dumps(newlines=0, indent=' ')
>>> print(text)
>>> text = self.dumps(newlines=True, indent=' ')
>>> print(text)
```

`_compress_dump_to_fileptr(file, arcname=None, indent=None, newlines=False)`

Experimental method to save compressed kwcoco files, may be folded into dump in the future.

`_dump(file, indent, newlines, compress)`

Case where we are dumping to an open file pointer. We assume this means the dataset has been written to disk.

`dump(file=None, indent=None, newlines=False, temp_file='auto', compress='auto')`

Writes the dataset out to the json format

Parameters

- **file** (*PathLike* | *IO* | *None*) – Where to write the data. Can either be a path to a file or an open file pointer / stream. If unspecified, it will be written to the current `fp`ath property.
- **indent** (*int* | *str* | *None*) – indentation for the json file. See `json.dump()` for details.
- **newlines** (*bool*) – if True, each annotation, image, category gets its own line.
- **temp_file** (*bool* | *str*) – Argument to `safer.open()`. Ignored if `file` is not a *PathLike* object. Defaults to ‘auto’, which is False on Windows and True everywhere else.

- **compress** (*bool | str*) – if True, dumps the kwcoco file as a compressed zipfile. In this case a literal IO file object must be opened in binary write mode. If auto, then it will default to False unless it can introspect the file name and the name ends with .zip

Example

```
>>> import kwcoco
>>> import ubelt as ub
>>> dpath = ub.Path.appdir('kwcoco/demo/dump').ensuredir()
>>> dset = kwcoco.CocoDataset.demo()
>>> dset.fpath = dpath / 'my_coco_file.json'
>>> # Calling dump writes to the current fpath attribute.
>>> dset.dump()
>>> assert dset.dataset == kwcoco.CocoDataset(dset.fpath).dataset
>>> assert dset.dumps() == dset.fpath.read_text()
>>> #
>>> # Using compress=True can save a lot of space and it
>>> # is transparent when reading files via CocoDataset
>>> dset.dump(compress=True)
>>> assert dset.dataset == kwcoco.CocoDataset(dset.fpath).dataset
>>> assert dset.dumps() != dset.fpath.read_text(errors='replace')
```

Example

```
>>> import kwcoco
>>> import ubelt as ub
>>> # Compression auto-defaults based on the file name.
>>> dpath = ub.Path.appdir('kwcoco/demo/dump').ensuredir()
>>> dset = kwcoco.CocoDataset.demo()
>>> fpath1 = dset.fpath = dpath / 'my_coco_file.zip'
>>> dset.dump()
>>> fpath2 = dset.fpath = dpath / 'my_coco_file.json'
>>> dset.dump()
>>> assert fpath1.read_bytes()[0:8] != fpath2.read_bytes()[0:8]
```

`_check_json_serializable(verbose=1)`

Debug which part of a coco dataset might not be json serializable

`_check_integrity()`

perform most checks

`_check_index()`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> self._check_index()
>>> # Force a failure
>>> self.index.anns.pop(1)
>>> self.index.anns.pop(2)
>>> import pytest
>>> with pytest.raises(AssertionError):
>>>     self._check_index()
```

`_abc_impl = <_abc._abc_data object>`

`_check_pointers(verbose=1)`

Check that all category and image ids referenced by annotations exist

`_build_index()`

`union(*, disjoint_tracks=True, remember_parent=False, **kwargs)`

Merges multiple `CocoDataset` items into one. Names and associations are retained, but ids may be different.

Parameters

- `*others` – a series of CocoDatasets that we will merge. Note, if called as an instance method, the “self” instance will be the first item in the “others” list. But if called like a classmethod, “others” will be empty by default.
- `disjoint_tracks (bool)` – if True, we will assume track-ids are disjoint and if two datasets share the same track-id, we will disambiguate them. Otherwise they will be copied over as-is. Defaults to True.
- `remember_parent (bool)` – if True, videos and images will save information about their parent in the “union_parent” field.
- `**kwargs` – constructor options for the new merged CocoDataset

Returns

a new merged coco dataset

Return type

`kwcoco.CocoDataset`

CommandLine

```
xdoctest -m kwcoco.coco_dataset CocoDataset.union
```

Example

```
>>> import kwcoco
>>> # Test union works with different keypoint categories
>>> dset1 = kwcoco.CocoDataset.demo('shapes1')
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> dset1.remove_keypoint_categories(['bot_tip', 'mid_tip', 'right_eye'])
>>> dset2.remove_keypoint_categories(['top_tip', 'left_eye'])
>>> dset_12a = kwcoco.CocoDataset.union(dset1, dset2)
>>> dset_12b = dset1.union(dset2)
>>> dset_21 = dset2.union(dset1)
>>> def add_hist(h1, h2):
>>>     return {k: h1.get(k, 0) + h2.get(k, 0) for k in set(h1) | set(h2)}
>>> kpfreq1 = dset1.keypoint_annotation_frequency()
>>> kpfreq2 = dset2.keypoint_annotation_frequency()
>>> kpfreq_want = add_hist(kpfreq1, kpfreq2)
>>> kpfreq_got1 = dset_12a.keypoint_annotation_frequency()
>>> kpfreq_got2 = dset_12b.keypoint_annotation_frequency()
>>> assert kpfreq_want == kpfreq_got1
>>> assert kpfreq_want == kpfreq_got2
```

```
>>> # Test disjoint gid datasets
>>> dset1 = kwcoco.CocoDataset.demo('shapes3')
>>> for new_gid, img in enumerate(dset1.dataset['images'], start=10):
>>>     for aid in dset1.gid_to_aids[img['id']]:
>>>         dset1.anns[aid]['image_id'] = new_gid
>>>     img['id'] = new_gid
>>> dset1.index.clear()
>>> dset1._build_index()
>>> #
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> for new_gid, img in enumerate(dset2.dataset['images'], start=100):
>>>     for aid in dset2.gid_to_aids[img['id']]:
>>>         dset2.anns[aid]['image_id'] = new_gid
>>>     img['id'] = new_gid
>>> dset1.index.clear()
>>> dset2._build_index()
>>> others = [dset1, dset2]
>>> merged = kwcoco.CocoDataset.union(*others)
>>> print('merged = {!r}'.format(merged))
>>> print('merged imgs = {}'.format(ub.urepr(merged.imgs, nl=1)))
>>> assert set(merged.imgs) & set([10, 11, 12, 100, 101]) == set(merged.imgs)
```

```
>>> # Test data is not preserved
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> dset1 = kwcoco.CocoDataset.demo('shapes3')
>>> others = (dset1, dset2)
>>> cls = self = kwcoco.CocoDataset
>>> merged = cls.union(*others)
>>> print('merged = {!r}'.format(merged))
>>> print('merged imgs = {}'.format(ub.urepr(merged.imgs, nl=1)))
>>> assert set(merged.imgs) & set([1, 2, 3, 4, 5]) == set(merged.imgs)
```

```
>>> # Test track-ids are mapped correctly
>>> dset1 = kwcoco.CocoDataset.demo('vidshapes1')
>>> dset2 = kwcoco.CocoDataset.demo('vidshapes2')
>>> dset3 = kwcoco.CocoDataset.demo('vidshapes3')
>>> others = (dset1, dset2, dset3)
>>> for dset in others:
>>>     [a.pop('segmentation', None) for a in dset.index.anns.values()]
>>>     [a.pop('keypoints', None) for a in dset.index.anns.values()]
>>>     cls = self = kwcoco.CocoDataset
>>>     merged = cls.union(*others, disjoint_tracks=1)
>>>     print('dset1.anns = {}'.format(ub.urepr(dset1.anns, nl=1)))
>>>     print('dset2.anns = {}'.format(ub.urepr(dset2.anns, nl=1)))
>>>     print('dset3.anns = {}'.format(ub.urepr(dset3.anns, nl=1)))
>>>     print('merged.anns = {}'.format(ub.urepr(merged.anns, nl=1)))
```

Example

```
>>> import kwcoco
>>> # Test empty union
>>> empty_union = kwcoco.CocoDataset.union()
>>> assert len(empty_union.index.imgs) == 0
```

Todo:

- [] are supercategories broken?
 - [] reuse image ids where possible
 - [] reuse annotation / category ids where possible
 - [X] handle case where no inputs are given
 - [x] disambiguate track-ids
 - [x] disambiguate video-ids
-

`subset(gids, copy=False, autobuild=True)`

Return a subset of the larger coco dataset by specifying which images to port. All annotations in those images will be taken.

Parameters

- **gids** (*List[int]*) – image-ids to copy into a new dataset
- **copy** (*bool*) – if True, makes a deep copy of all nested attributes, otherwise makes a shallow copy. Defaults to True.
- **autobuild** (*bool*) – if True will automatically build the fast lookup index. Defaults to True.

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> gids = [1, 3]
>>> sub_dset = self.subset(gids)
>>> assert len(self.index.gid_to_aids) == 3
>>> assert len(sub_dset.gid_to_aids) == 2
```

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('vidshapes2')
>>> gids = [1, 2]
>>> sub_dset = self.subset(gids, copy=True)
>>> assert len(sub_dset.index.videos) == 1
>>> assert len(self.index.videos) == 2
```

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> sub1 = self.subset([1])
>>> sub2 = self.subset([2])
>>> sub3 = self.subset([3])
>>> others = [sub1, sub2, sub3]
>>> rejoined = kwcoco.CocoDataset.union(*others)
>>> assert len(sub1.anns) == 9
>>> assert len(sub2.anns) == 2
>>> assert len(sub3.anns) == 0
>>> assert rejoined.basic_stats() == self.basic_stats()
```

view_sql(*force_rewrite=False*, *memory=False*, *backend='sqlite'*, *sql_db_fpath=None*)

Create a cached SQL interface to this dataset suitable for large scale multiprocessing use cases.

Parameters

- **force_rewrite** (*bool*) – if True, forces an update to any existing cache file on disk
- **memory** (*bool*) – if True, the database is constructed in memory.
- **backend** (*str*) – sqlite or postgresql
- **sql_db_fpath** (*str* | *PathLike* | *None*) – overrides the database uri

Note: This view cache is experimental and currently depends on the timestamp of the file pointed to by `self.fpath`. In other words dont use this on in-memory datasets.

CommandLine

```
KWCOCO_WITH_POSTGRESQL=1 xdoctest -m /home/joncral/code/kwCOCO/kwCOCO/coco_
dataset.py CocoDataset.view_sql
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(env:KWCOCO_WITH_POSTGRESQL)
>>> # xdoctest: +REQUIRES(module:psycopg2)
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes32')
>>> postgres_dset = dset.view_sql(backend='postgresql', force_rewrite=True)
>>> sqlite_dset = dset.view_sql(backend='sqlite', force_rewrite=True)
>>> list(dset.anns.keys())
>>> list(postgres_dset.anns.keys())
>>> list(sqlite_dset.anns.keys())
```


`kwCOCO.coco_dataset.demo_coco_data()`

Simple data for testing.

This contains several non-standard fields, which help ensure robustness of functions tested with this data. For more compliant demodata see the `kwCOCO.demodata` submodule.

Example

```
>>> # xdoctest: +REQUIRES(--show)
>>> import kwCOCO
>>> from kwCOCO.coco_dataset import demo_coco_data
>>> dataset = demo_coco_data()
>>> self = kwCOCO.CocoDataset(dataset, tag='demo')
>>> import kwplot
>>> kwplot.autopl()
>>> self.show_image(gid=1)
>>> kwplot.show_if_requested()
```

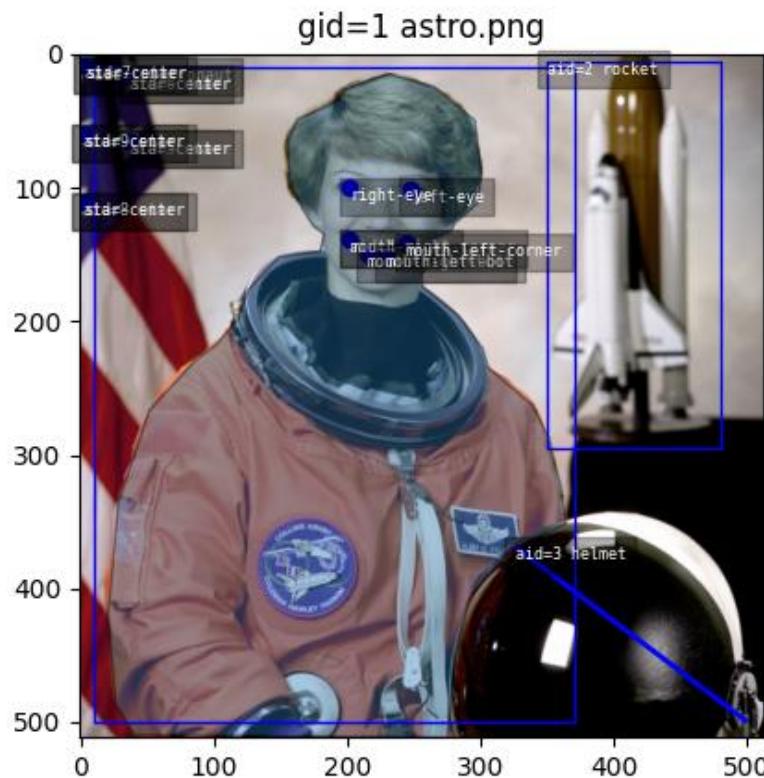

2.1.2.7 `kwcoco.coco_evaluator` module

Evaluates a predicted coco dataset against a truth coco dataset.

This currently computes detection-level metrics.

The components in this module work programmaticaly or as a command line script.

Todo:

- [] does `evaluate` return one result or multiple results based on different configurations?
 - [] `max_dets` - TODO: in original pycocoutils but not here
 - [] Flag that allows for polygon instead of bounding box overlap
 - [] How do we note what `iou_thresh` and `area-range` were in the result plots?
-

CommandLine

```
xdoc test -m kwcoco.coco_evaluator __doc__:0 --vd --slow
```

Example

```
>>> from kwcoco.coco_evaluator import * # NOQA
>>> from kwcoco.coco_evaluator import CocoEvaluator
>>> import kwcoco
>>> # note: increase the number of images for better looking metrics
>>> true_dset = kwcoco.CocoDataset.demo('shapes8')
>>> from kwcoco.demo.perterb import perterb_coco
>>> kwargs = {
>>>     'box_noise': 0.5,
>>>     'n_fp': (0, 10),
>>>     'n_fn': (0, 10),
>>>     'with_probs': True,
>>> }
>>> pred_dset = perterb_coco(true_dset, **kwargs)
>>> print('true_dset = {!r}'.format(true_dset))
>>> print('pred_dset = {!r}'.format(pred_dset))
>>> config = {
>>>     'true_dataset': true_dset,
>>>     'pred_dataset': pred_dset,
>>>     'area_range': ['all', 'small'],
>>>     'iou_thresh': [0.3, 0.95],
>>> }
>>> coco_eval = CocoEvaluator(config)
>>> results = coco_eval.evaluate()
>>> # Now we can draw / serialize the results as we please
>>> dpath = ub.Path.appdir('kwcoco/tests/test_out_dpath').ensuredir()
>>> results_fpath = dpath / 'metrics.json'
>>> print('results_fpath = {!r}'.format(results_fpath))
>>> results.dump(results_fpath, indent='    ')
>>> measures = results['area_range=all,iou_thresh=0.3'].nocls_measures
>>> import pandas as pd
>>> print(pd.DataFrame(ub.dict_isect(
>>>     measures, ['f1', 'g1', 'mcc', 'thresholds',
>>>                 'ppv', 'tpr', 'tnr', 'npv', 'fpr',
>>>                 'tp_count', 'fp_count',
>>>                 'tn_count', 'fn_count'])).iloc[:100])
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> # xdoctest: +REQUIRES(--slow)
>>> results.dump_figures(dpath)
>>> print('dpath = {!r}'.format(dpath))
>>> # xdoctest: +REQUIRES(--vd)
>>> if ub.argflag('--vd') or 1:
>>>     import xdev
>>>     xdev.view_directory(dpath)
```

```
class kwcoco.coco_evaluator.CocoEvalConfig(*args, **kwargs)
```

Bases: DataConfig

Evaluate and score predicted versus truth detections / classifications in a COCO dataset

Valid options: []

Parameters

- `*args` – positional arguments for this data config
- `**kwargs` – keyword arguments for this data config

```
default = {'ap_method': <Value('pycocotools')>, 'area_range': <Value(['all'])>,  
'assign_workers': <Value(8)>, 'classes_of_interest': <Value(None)>, 'compat':  
<Value('mutex')>, 'force_pycocoutils': <Value(False)>, 'fp_cutoff': <Value(inf)>,  
'ignore_classes': <Value(None)>, 'implicit_ignore_classes': <Value(['ignore'])>,  
'implicit_negative_classes': <Value(['background'])>, 'iou_bias': <Value(1)>,  
'iou_thresh': <Value(0.5)>, 'load_workers': <Value(0)>, 'max_dets': <Value(inf)>,  
'monotonic_ppv': <Value(True)>, 'pred_dataset': <Value(None)>, 'true_dataset':  
<Value(None)>, 'use_area_attr': <Value('try')>, 'use_image_names': <Value(False)>}
```

`normalize()`

```
class kwcoco.coco_evaluator.CocoEvaluator(config)
```

Bases: `object`

Abstracts the evaluation process to execute on two coco datasets.

This can be run as a standalone script where the user specifies the paths to the true and predited dataset explicitly, or this can be used by a higher level script that produces the predictions and then sends them to this evaluator.

Example

```
>>> from kwcoco.coco_evaluator import CocoEvaluator  
>>> from kwcoco.demo.perterb import perterb_coco  
>>> import kwcoco  
>>> true_dset = kwcoco.CocoDataset.demo('shapes8')  
>>> kwargs = {  
    >>>     'box_noise': 0.5,  
    >>>     'n_fp': (0, 10),  
    >>>     'n_fn': (0, 10),  
    >>>     'with_probs': True,  
    >>> }  
>>> pred_dset = perterb_coco(true_dset, **kwargs)  
>>> config = {  
    >>>     'true_dataset': true_dset,  
    >>>     'pred_dataset': pred_dset,  
    >>>     'classes_of_interest': [],  
    >>> }  
>>> coco_eval = CocoEvaluator(config)  
>>> results = coco_eval.evaluate()
```

`log(msg, level='INFO')`

`_init()`

Performs initial coercion from given inputs into dictionaries of kwimage.Detection objects and attempts to ensure comparable category and image ids.

`_ensure_init()`

`classmethod _rectify_classes(true_classes, pred_classes)`

`classmethod _coerce_dets(dataset, verbose=0, workers=0)`

Coerce the input to a mapping from image-id to kwimage.Detection

Also capture a CocoDataset if possible.

Returns

`gid_to_det`: mapping from gid to dets
`extras`: any extra information we gathered via coercion

Return type

`Tuple[Dict[int, Detections], Dict]`

Example

```
>>> from kwcoco.coco_evaluator import * # NOQA
>>> import kwcoco
>>> coco_dset = kwcoco.CocoDataset.demo('shapes8')
>>> gid_to_det, extras = CocoEvaluator._coerce_dets(coco_dset)
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_evaluator import * # NOQA
>>> import kwcoco
>>> coco_dset = kwcoco.CocoDataset.demo('shapes8').view_sql()
>>> gid_to_det, extras = CocoEvaluator._coerce_dets(coco_dset)
```

`_build_dmet()`

Builds the detection metrics object

Returns

DetectionMetrics - object that can perform assignment and build confusion vectors.

`evaluate()`

Executes the main evaluation logic. Performs assignments between detections to make DetectionMetrics object, then creates per-item and ovr confusion vectors, and performs various threshold-vs-confusion analyses.

Returns

container storing (and capable of drawing / serializing) results

Return type

`CocoResults`

`kwcoco.coco_evaluator.dmet_area_weights(dmet, orig_weights, cfsn_vecs, area_ranges, coco_eval, use_area_attr=False)`

Hacky function to compute confusion vector ignore weights for different area thresholds. Needs to be slightly refactored.

```
class kwcoco.coco_evaluator.CocoResults(resdata=None)
Bases: NiceRepr, DictProxy
```

CommandLine

```
xdoctest -m /home/joncrall/code/kwcoco/kwcoco/coco_evaluator.py CocoResults --
    ↪profile
```

Example

```
>>> from kwcoco.coco_evaluator import * # NOQA
>>> from kwcoco.coco_evaluator import CocoEvaluator
>>> import kwcoco
>>> true_dset = kwcoco.CocoDataset.demo('shapes2')
>>> from kwcoco.demo.perterb import perterb_coco
>>> kwargs = {
>>>     'box_noise': 0.5,
>>>     'n_fp': (0, 10),
>>>     'n_fn': (0, 10),
>>> }
>>> pred_dset = perterb_coco(true_dset, **kwargs)
>>> print('true_dset = {!r}'.format(true_dset))
>>> print('pred_dset = {!r}'.format(pred_dset))
>>> config = {
>>>     'true_dataset': true_dset,
>>>     'pred_dataset': pred_dset,
>>>     'area_range': ['small'],
>>>     'iou_thresh': [0.3],
>>> }
>>> coco_eval = CocoEvaluator(config)
>>> results = coco_eval.evaluate()
>>> # Now we can draw / serialize the results as we please
>>> dpath = ub.Path.appdir('kwcoco/tests/test_out_dpath').ensuredir()
>>> #
>>> # test deserialization works
>>> state = results.__json__()
>>> self2 = CocoResults.from_json(state)
>>> #
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> results.dump_figures(dpath, figsize=(3, 2), tight=False) # make this go faster
>>> results.dump(dpath / 'metrics.json', indent=' ')
```

```
dump_figures(out_dpath, expt_title=None, figsize='auto', tight=True)
```

```
classmethod from_json(state)
```

```
dump(file, indent=' ')
```

Serialize to json file

```
class kwcoco.coco_evaluator.CocoSingleResult(nocls_measures, ovr_measures, cfsn_vecs, meta=None)
Bases: NiceRepr
```

Container class to store, draw, summarize, and serialize results from CocoEvaluator.

Example

```
>>> # xdoctest: +REQUIRES(--slow)
>>> from kwcoco.coco_evaluator import * # NOQA
>>> from kwcoco.coco_evaluator import CocoEvaluator
>>> import kwcoco
>>> true_dset = kwcoco.CocoDataset.demo('shapes8')
>>> from kwcoco.demo.perterb import perterb_coco
>>> kwargs = {
>>>     'box_noise': 0.2,
>>>     'n_fp': (0, 3),
>>>     'n_fn': (0, 3),
>>>     'with_probs': False,
>>> }
>>> pred_dset = perterb_coco(true_dset, **kwargs)
>>> print('true_dset = {!r}'.format(true_dset))
>>> print('pred_dset = {!r}'.format(pred_dset))
>>> config = {
>>>     'true_dataset': true_dset,
>>>     'pred_dataset': pred_dset,
>>>     'area_range': [(0, 32 ** 2), (32 ** 2, 96 ** 2)],
>>>     'iou_thresh': [0.3, 0.5, 0.95],
>>> }
>>> coco_eval = CocoEvaluator(config)
>>> results = coco_eval.evaluate()
>>> result = ub.peek(results.values())
>>> state = result.__json__()
>>> print('state = {}'.format(ub.urepr(state, nl=-1)))
>>> recon = CocoSingleResult.from_json(state)
>>> state = recon.__json__()
>>> print('state = {}'.format(ub.urepr(state, nl=-1)))
```

```
classmethod from_json(state)

dump(file, indent=' ')
    Serialize to json file

dump_figures(out_dpath, expt_title=None, figsize='auto', tight=True, verbose=1)

kwcoco.coco_evaluator._writefig(fig, metrics_dpath, fname, figsize, verbose, tight)

kwcoco.coco_evaluator._load_dets(pred_fpaths, workers=0)
```

Example

```
>>> from kwcoco.coco_evaluator import _load_dets, _load_dets_worker
>>> import ubelt as ub
>>> import kwcoco
>>> dpath = ub.Path.appdir('kwcoco/tests/load_dets').ensuredir()
>>> N = 4
>>> pred_fpaths = []
>>> for i in range(1, N + 1):
>>>     dset = kwcoco.CocoDataset.demo('shapes{}'.format(i))
```

(continues on next page)

(continued from previous page)

```
>>>     dset.fpath = dpath / 'shapes_{}.mscoco.json'.format(i)
>>>     dset.dump(dset.fpath)
>>>     pred_fpaths.append(dset.fpath)
>>>     dets, coco_dset = _load_dets(pred_fpaths)
>>>     print('dets = {!r}'.format(dets))
>>>     print('coco_dset = {!r}'.format(coco_dset))
```

`kwcoco.coco_evaluator._load_dets_worker(single_pred_fpath, with_coco=True)`

2.1.2.8 `kwcoco.coco_image` module

Defines the CocoImage class which is an object oriented way of manipulating data pointed to by a COCO image dictionary.

Notably this provides the `.imdelay` method for delayed image loading (which enables things like fast loading of subimage-regions / coarser scales in images that contain tiles / overviews - e.g. Cloud Optimized Geotiffs or COGs (Medical image formats may be supported in the future).

Todo: This file no longer is only images, it has logic for generic single-class objects. It should be refactored into `coco_objects0d.py` or something.

`class kwcoco.coco_image._CocoObject(obj, dset=None, bundle_dpath=None)`

Bases: `AliasedDictProxy, NiceRepr`

General coco scalar object

`property bundle_dpath`

`detach()`

Removes references to the underlying coco dataset, but keeps special information such that it wont be needed.

`class kwcoco.coco_image.CocoImage(img, dset=None)`

Bases: `_CocoObject`

An object-oriented representation of a coco image.

It provides helper methods that are specific to a single image.

This operates directly on a single coco image dictionary, but it can optionally be connected to a parent dataset, which allows it to use CocoDataset methods to query about relationships and resolve pointers.

This is different than the Images class in `coco_object1d`, which is just a vectorized interface to multiple objects.

Example

```
>>> import kwcoco
>>> dset1 = kwcoco.CocoDataset.demo('shapes8')
>>> dset2 = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
```

```
>>> self = kwcoco.CocoImage(dset1.imgs[1], dset1)
>>> print('self = {!r}'.format(self))
>>> print('self.channels = {}'.format(ub.urepr(self.channels, nl=1)))
```

```
>>> self = kwcoco.CocoImage(dset2.imgs[1], dset2)
>>> print('self.channels = {}'.format(ub.repr(self.channels, nl=1)))
>>> self.primary_asset()
>>> assert 'auxiliary' in self
```

classmethod from_gid(dset, gid)

property video

Helper to grab the video for this image if it exists

property name

detach()

Removes references to the underlying coco dataset, but keeps special information such that it wont be needed.

property assets

CocoImage.iter_assets.

Type

Convinience wrapper around

Type

func

property datetime

Try to get datetime information for this image. Not always possible.

annots()

Returns

a 1d annotations object referencing annotations in this image

Return type

Annots

stats()

get(key, default=NoParam)

keys()

Proxy getter attribute for underlying *self.img* dictionary

property channels

property num_channels

property dsize

primary_image_filepath(requires=None)

primary_asset(requires=None, as_dict=True)

Compute a “main” image asset.

Note: Uses a heuristic.

- First, try to find the auxiliary image that has with the smallest distortion to the base image (if known via *warp_aux_to_img*)

- Second, break ties by using the largest image if w / h is known
 - Last, if previous information not available use the first auxiliary image.
-

Parameters

- **requires** (*List[str] | None*) – list of attribute that must be non-*None* to consider an object as the primary one.
- **as_dict** (*bool*) – if True the return type is a raw dictionary. Otherwise use a newer object-oriented wrapper that should be duck-type swappable. In the future this default will change to False.

Returns

the asset dict or *None* if it is not found

Return type

None | dict

Todo:

- [] Add in primary heuristics
-

Example

```
>>> import kwarray
>>> from kwcoco.coco_image import * # NOQA
>>> rng = kwarray.ensure_rng(0)
>>> def random_asset(name, w=None, h=None):
>>>     return {'file_name': name, 'width': w, 'height': h}
>>> self = CocoImage({
>>>     'auxiliary': [
>>>         random_asset('1'),
>>>         random_asset('2'),
>>>         random_asset('3'),
>>>     ]
>>> })
>>> assert self.primary_asset()['file_name'] == '1'
>>> self = CocoImage({
>>>     'auxiliary': [
>>>         random_asset('1'),
>>>         random_asset('2', 3, 3),
>>>         random_asset('3'),
>>>     ]
>>> })
>>> assert self.primary_asset()['file_name'] == '2'
>>> #
>>> # Test new object oriented output
>>> self = CocoImage({
>>>     'file_name': 'foo',
>>>     'assets': [
>>>         random_asset('1'),
```

(continues on next page)

(continued from previous page)

```

>>>         random_asset('2'),
>>>         random_asset('3'),
>>>     ],
>>> }
>>> assert self.primary_asset(as_dict=False) is self
>>> self = CocoImage({
>>>     'assets': [
>>>         random_asset('1'),
>>>         random_asset('3'),
>>>     ],
>>>     'auxiliary': [
>>>         random_asset('1'),
>>>         random_asset('2', 3, 3),
>>>         random_asset('3'),
>>>     ]
>>> }
>>> assert self.primary_asset(as_dict=False)['file_name'] == '2'

```

iter_image_filepaths(*with_bundle=True*)

Could rename to iter_asset_filepaths

Parameters

with_bundle (*bool*) – If True, prepends the bundle dpath to fully specify the path. Otherwise, just returns the registered string in the file_name attribute of each asset. Defaults to True.

Yields

ub.Path

iter_assets()

Iterate through assets (which could include the image itself if it points to a file path).

Object-oriented alternative to [CocoImage.iter_asset_objs\(\)](#)**Yields***CocoImage | CocoAsset* – an asset object (or image object if it points to a file)**Example**

```

>>> import kwcoco
>>> coco_img = kwcoco.CocoImage({'width': 128, 'height': 128})
>>> assert len(list(coco_img.iter_assets())) == 0
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> assert len(list(self.iter_assets())) > 1
>>> dset = kwcoco.CocoDataset.demo('vidshapes8')
>>> self = dset.coco_image(1)
>>> assert list(self.iter_assets()) == [self]

```

iter_asset_objs()

Iterate through base + auxiliary dicts that have file paths

Note: In most cases prefer [iter_assets\(\)](#) instead.

Yields

dict – an image or auxiliary dictionary

find_asset(channels)

Find the asset dictionary with the specified channels

Parameters

channels (*str* | *FusedChannelSpec*) – channel names the asset must have.

Returns

CocoImage | CocoAsset

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoImage({
>>>     'file_name': 'raw',
>>>     'channels': 'red|green|blue',
>>>     'assets': [
>>>         {'file_name': '1', 'channels': 'spam'},
>>>         {'file_name': '2', 'channels': 'eggs|jam'},
>>>     ],
>>>     'auxiliary': [
>>>         {'file_name': '3', 'channels': 'foo'},
>>>         {'file_name': '4', 'channels': 'bar|baz'},
>>>     ]
>>> )
>>> assert self.find_asset('blah') is None
>>> assert self.find_asset('red|green|blue') is self
>>> self.find_asset('foo')['file_name'] == '3'
>>> self.find_asset('baz')['file_name'] == '4'
```

find_asset_obj(channels)

Find the asset dictionary with the specified channels

In most cases use CocoImage.find_asset() instead.

Example

```
>>> import kwcoco
>>> coco_img = kwcoco.CocoImage({'width': 128, 'height': 128})
>>> coco_img.add_auxiliary_item(
>>>     'rgb.png', channels='red|green|blue', width=32, height=32)
>>> assert coco_img.find_asset_obj('red') is not None
>>> assert coco_img.find_asset_obj('green') is not None
>>> assert coco_img.find_asset_obj('blue') is not None
>>> assert coco_img.find_asset_obj('red|blue') is not None
>>> assert coco_img.find_asset_obj('red|green|blue') is not None
>>> assert coco_img.find_asset_obj('red|green|blue') is not None
>>> assert coco_img.find_asset_obj('black') is None
>>> assert coco_img.find_asset_obj('r') is None
```

Example

```
>>> # Test with concise channel code
>>> import kwcoco
>>> coco_img = kwcoco.CocoImage({'width': 128, 'height': 128})
>>> coco_img.add_auxiliary_item(
    'msi.png', channels='foo.0:128', width=32, height=32)
>>> assert coco_img.find_asset_obj('foo') is None
>>> assert coco_img.find_asset_obj('foo.3') is not None
>>> assert coco_img.find_asset_obj('foo.3:5') is not None
>>> assert coco_img.find_asset_obj('foo.3000') is None
```

`_assets_key()`

Internal helper for transition from auxiliary -> assets in the image spec

`add_annotation(**ann)`

Adds an annotation to this image.

This is a convinience method, and requires that this CocoImage is still connected to a parent dataset.

Parameters

`**ann` – annotation attributes (e.g. bbox, category_id)

Returns

the new annotation id

Return type

`int`

SeeAlso:

`kwcoco.CocoDataset.add_annotation()`

`add_asset(file_name=None, channels=None, imdata=None, warp_aux_to_img=None, width=None, height=None, imwrite=False, image_id=None, **kw)`

Adds an auxiliary / asset item to the image dictionary.

This operation can be done purely in-memory (the default), or the image data can be written to a file on disk (via the `imwrite=True` flag).

Parameters

- **file_name** (`str | PathLike | None`) – The name of the file relative to the bundle directory. If unspecified, `imdata` must be given.
- **channels** (`str | kwcoco.FusedChannelSpec | None`) – The channel code indicating what each of the bands represents. These channels should be disjoint wrt to the existing data in this image (this is not checked).
- **imdata** (`ndarray | None`) – The underlying image data this auxiliary item represents. If unspecified, it is assumed `file_name` points to a path on disk that will eventually exist. If `imdata`, `file_name`, and the special `imwrite=True` flag are specified, this function will write the data to disk.
- **warp_aux_to_img** (`kwimage.Affine | None`) – The transformation from this auxiliary space to image space. If unspecified, assumes this item is related to image space by only a scale factor.
- **width** (`int | None`) – Width of the data in auxiliary space (inferred if unspecified)

- **height** (*int | None*) – Height of the data in auxiliary space (inferred if unspecified)
- **imwrite** (*bool*) – If specified, both imdata and file_name must be specified, and this will write the data to disk. Note: it is recommended that you simply call imwrite yourself before or after calling this function. This lets you better control imwrite parameters.
- **image_id** (*int | None*) – An asset dictionary contains an image-id, but it should *not* be specified here. If it is, then it *must* agree with this image's id.
- ****kw** – stores arbitrary key/value pairs in this new asset.

Todo:

- [] Allow imwrite to specify an executor that is used to return a Future so the imwrite call does not block.
-

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> coco_img = dset.coco_image(1)
>>> imdata = np.random.rand(32, 32, 5)
>>> channels = kwcoco.FusedChannelSpec.coerce('Aux:5')
>>> coco_img.add_asset(imdata=imdata, channels=channels)
```

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset()
>>> gid = dset.add_image(name='my_image_name', width=200, height=200)
>>> coco_img = dset.coco_image(gid)
>>> coco_img.add_asset('path/img1_B0.tif', channels='B0', width=200, height=200)
>>> coco_img.add_asset('path/img1_B1.tif', channels='B1', width=200, height=200)
>>> coco_img.add_asset('path/img1_B2.tif', channels='B2', width=200, height=200)
>>> coco_img.add_asset('path/img1_TCI.tif', channels='r|g|b', width=200, height=200)
```

imdelay(*channels=None, space='image', resolution=None, bundle_dpath=None, interpolation='linear', antialias=True, nodata_method=None, RESOLUTION_KEY=None*)

Perform a delayed load on the data in this image.

The delayed load can load a subset of channels, and perform lazy warping operations. If the underlying data is in a tiled format this can reduce the amount of disk IO needed to read the data if only a small crop or lower resolution view of the data is needed.

Note: This method is experimental and relies on the delayed load proof-of-concept.

Parameters

- **gid** (*int*) – image id to load

- **channels** (`kwcoco.FusedChannelSpec`) – specific channels to load. if unspecified, all channels are loaded.
- **space** (`str`) – can either be “image” for loading in image space, or “video” for loading in video space.
- **resolution** (`None | str | float`) – If specified, applies an additional scale factor to the result such that the data is loaded at this specified resolution. This requires that the image / video has a registered resolution attribute and that its units agree with this request.

Todo:

- [] This function could stand to have a better name. Maybe `imread` with a `delayed=True` flag? Or maybe just `delayed_load`?

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> gid = 1
>>> #
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = CocoImage(dset.imgs[gid], dset)
>>> delayed = self.imdelay()
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> #
>>> dset = kwcoco.CocoDataset.demo('shapes8')
>>> delayed = dset.coco_image(gid).imdelay()
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

```
>>> crop = delayed.crop((slice(0, 3), slice(0, 3)))
>>> crop.finalize()
```

```
>>> # TODO: should only select the "red" channel
>>> dset = kwcoco.CocoDataset.demo('shapes8')
>>> delayed = CocoImage(dset.imgs[gid], dset).imdelay(channels='r')
```

```
>>> import kwcoco
>>> gid = 1
>>> #
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> delayed = dset.coco_image(gid).imdelay(channels='B1|B2', space='image')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> delayed = dset.coco_image(gid).imdelay(channels='B1|B2|B11', space='image')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

(continues on next page)

(continued from previous page)

```
>>> delayed = dset.coco_image(gid).imdelay(channels='B8|B1', space='video')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

```
>>> delayed = dset.coco_image(gid).imdelay(channels='B8|foo|bar|B1', space=
...>>> 'video')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> coco_img = dset.coco_image(1)
>>> # Test case where nothing is registered in the dataset
>>> delayed = coco_img.imdelay()
>>> final = delayed.finalize()
>>> assert final.shape == (512, 512, 3)
```

```
>>> delayed = coco_img.imdelay()
>>> final = delayed.finalize()
>>> print('final.shape = {}'.format(ub.urepr(final.shape, nl=1)))
>>> assert final.shape == (512, 512, 3)
```

Example

```
>>> # Test that delay works when imdata is stored in the image
>>> # dictionary itself.
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> coco_img = dset.coco_image(1)
>>> imdata = np.random.rand(6, 6, 5)
>>> imdata[:] = np.arange(5)[None, None, :]
>>> channels = kwcoco.FusedChannelSpec.coerce('Aux:5')
>>> coco_img.add_auxiliary_item(imdata=imdata, channels=channels)
>>> delayed = coco_img.imdelay(channels='B1|Aux:2:4')
>>> final = delayed.finalize()
```

Example

```
>>> # Test delay when loading in asset space
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image(1)
>>> stream1 = coco_img.channels.streams()[0]
>>> stream2 = coco_img.channels.streams()[1]
>>> asset_delayed = coco_img.imdelay(stream1, space='asset')
>>> img_delayed = coco_img.imdelay(stream1, space='image')
>>> vid_delayed = coco_img.imdelay(stream1, space='video')
>>> #
>>> aux_imdata = asset_delayed.as_xarray().finalize()
>>> img_imdata = img_delayed.as_xarray().finalize()
>>> assert aux_imdata.shape != img_imdata.shape
>>> # Cannot load multiple asset items at the same time in
>>> # asset space
>>> import pytest
>>> fused_channels = stream1 | stream2
>>> from delayed_image.delayed_nodes import CoordinateCompatibilityError
>>> with pytest.raises(CoordinateCompatibilityError):
>>>     aux_delayed2 = coco_img.imdelay(fused_channels, space='asset')
```

Example

```
>>> # Test loading at a specific resolution.
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image(1)
>>> coco_img.img['resolution'] = '1 meter'
>>> img_delayed1 = coco_img.imdelay(space='image')
>>> vid_delayed1 = coco_img.imdelay(space='video')
>>> # test with unitless request
>>> img_delayed2 = coco_img.imdelay(space='image', resolution=3.1)
>>> vid_delayed2 = coco_img.imdelay(space='video', resolution='3.1 meter')
>>> np.ceil(img_delayed1.shape[0] / 3.1) == img_delayed2.shape[0]
>>> np.ceil(vid_delayed1.shape[0] / 3.1) == vid_delayed2.shape[0]
>>> # test with unitless data
>>> coco_img.img['resolution'] = 1
>>> img_delayed2 = coco_img.imdelay(space='image', resolution=3.1)
>>> vid_delayed2 = coco_img.imdelay(space='video', resolution='3.1 meter')
>>> np.ceil(img_delayed1.shape[0] / 3.1) == img_delayed2.shape[0]
>>> np.ceil(vid_delayed1.shape[0] / 3.1) == vid_delayed2.shape[0]
```

valid_region(space='image')

If this image has a valid polygon, return it in image, or video space

Returns

None | kwimage.MultiPolygon

property warp_vid_from_img

Affine transformation that warps image space -> video space.

Returns

The transformation matrix

Return type

`kwimage.Affine`

property warp_img_from_vid

Affine transformation that warps video space -> image space.

Returns

The transformation matrix

Return type

`kwimage.Affine`

_warp_for_resolution(*space*, *resolution*=*None*)

Compute a transform from image-space to the requested space at a target resolution.

_annot_segmentation(*ann*, *space*='video', *resolution*=*None*)

” Load annotation segmentations in a requested space at a target resolution.

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image[1]
>>> coco_img.img['resolution'] = '1 meter'
>>> ann = coco_img.annots().objs[0]
>>> img_sseg = coco_img._annot_segmentation(ann, space='image')
>>> vid_sseg = coco_img._annot_segmentation(ann, space='video')
>>> img_sseg_2m = coco_img._annot_segmentation(ann, space='image', resolution=
    ~'2 meter')
>>> vid_sseg_2m = coco_img._annot_segmentation(ann, space='video', resolution=
    ~'2 meter')
>>> print(f'img_sseg.area      = {img_sseg.area}')
>>> print(f'vid_sseg.area      = {vid_sseg.area}')
>>> print(f'img_sseg_2m.area = {img_sseg_2m.area}')
>>> print(f'vid_sseg_2m.area = {vid_sseg_2m.area}')
```

_annot_segmentations(*anns*, *space*='video', *resolution*=*None*)

” Load multiple annotation segmentations in a requested space at a target resolution.

Example

```
>>> from kwCOCO.coco_image import * # NOQA
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image(1)
>>> coco_img.img['resolution'] = '1 meter'
>>> ann = coco_img.annots().objs[0]
>>> img_sseg = coco_img._annot_segmentations([ann], space='image')
>>> vid_sseg = coco_img._annot_segmentations([ann], space='video')
>>> img_sseg_2m = coco_img._annot_segmentations([ann], space='image', resolution='2 meter')
>>> vid_sseg_2m = coco_img._annot_segmentations([ann], space='video', resolution='2 meter')
>>> print(f'img_sseg.area = {img_sseg[0].area}')
>>> print(f'vid_sseg.area = {vid_sseg[0].area}')
>>> print(f'img_sseg_2m.area = {img_sseg_2m[0].area}')
>>> print(f'vid_sseg_2m.area = {vid_sseg_2m[0].area}')
```

resolution(*space='image'*, *channel=None*, *RESOLUTION_KEY=None*)

Returns the resolution of this CocoImage in the requested space if known. Errors if this information is not registered.

Parameters

- **space** (*str*) – the space to the resolution of. Can be either “image”, “video”, or “asset”.
- **channel** (*str | kwCOCO.FusedChannelSpec | None*) – a channel that identifies a single asset, only relevant if asking for asset space

Returns

has items *mag* (with the magnitude of the resolution) and *unit*, which is a convenience and only loosely enforced.

Return type

Dict

Example

```
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> self.img['resolution'] = 1
>>> self.resolution()
>>> self.img['resolution'] = '1 meter'
>>> self.resolution(space='video')
{'mag': (1.0, 1.0), 'unit': 'meter'}
>>> self.resolution(space='asset', channel='B11')
>>> self.resolution(space='asset', channel='B1')
```

_scalefactor_for_resolution(*space*, *resolution*, *channel=None*, *RESOLUTION_KEY=None*)

Given image or video space, compute the scale factor needed to achieve the target resolution.

Use this to implement scale_resolution_from_img scale_resolution_from_vid

Parameters

- **space** (*str*) – the space to the resolution of. Can be either “image”, “video”, or “asset”.
- **resolution** (*str | float | int*) – the resolution (ideally with units) you want.
- **channel** (*str | kwcoco.FusedChannelSpec | None*) – a channel that identifies a single asset, only relevant if asking for asset space

Returns

the x and y scale factor that can be used to scale the underlying “space” to achieve the requested resolution.

Return type

Tuple[float, float]

_detections_for_resolution(*space='video'*, *resolution=None*, *aids=None*, *RESOLUTION_KEY=None*)

This is slightly less than ideal in terms of API, but it will work for now.

add_auxiliary_item(***kwargs*)

delay(***kwargs*)

show(***kwargs*)


Show the image with matplotlib if possible

SeeAlso:

`kwcoco.CocoDataset.show_image()`

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()t()
>>> self.show()
```

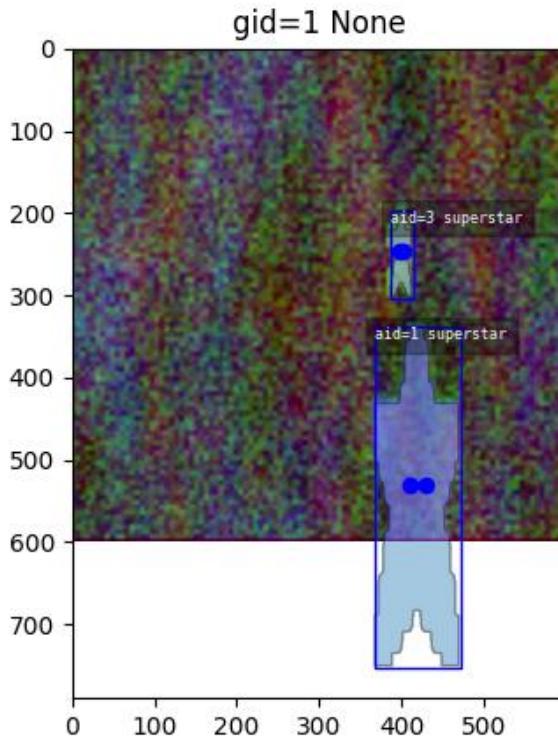**draw(**kwargs)**


Draw the image on an ndarray using opencv

SeeAlso:

`kwCOCO.CocoDataset.draw_image()`

Example

```
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> canvas = self.draw()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.imshow(canvas)
```

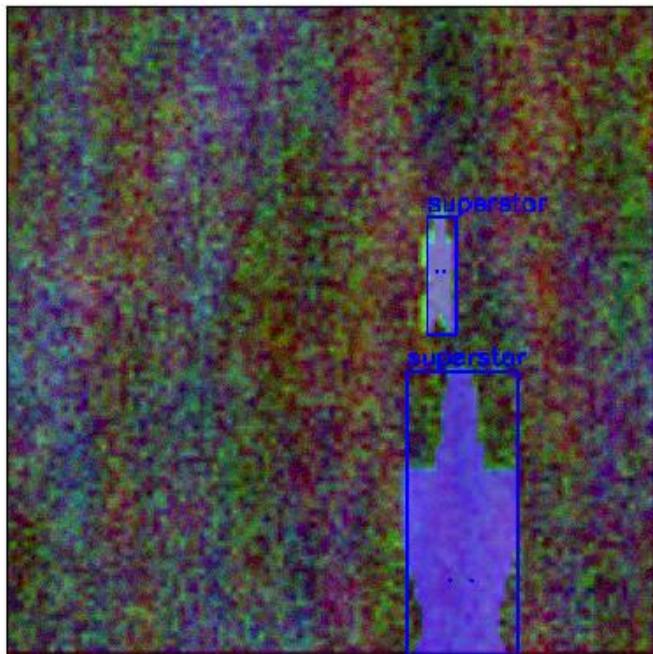

```
class kwcoco.coco_image.CocoAsset(asset, bundle_dpath=None)
```

Bases: *_CocoObject*

A Coco Asset / Auxiliary Item

Represents one 2D image file relative to a parent img.

Could be a single asset, or an image with sub-assets, but sub-assets are ignored here.

Initially we called these “auxiliary” items, but I think we should change their name to “assets”, which better maps with STAC terminology.

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> self = CocoAsset({'warp_aux_to_img': 'foo'})
>>> assert 'warp_aux_to_img' in self
>>> assert 'warp_img_from_asset' in self
>>> assert 'warp_wld_from_asset' not in self
>>> assert 'warp_to_wld' not in self
>>> self['warp_aux_to_img'] = 'bar'
>>> assert self._proxy == {'warp_aux_to_img': 'bar'}
```

```
image_filepath()
```

```
class kwcoco.coco_image.CocoVideo(obj, dset=None, bundle_dpath=None)
```

Bases: *_CocoObject*

Object representing a single video.

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes1')
>>> obj = dset.videos().objs[0]
>>> self = CocoVideo(obj, dset)
>>> print(f'self={self}')
```

class kwcoco.coco_image.CocoAnnotation(*obj, dset=None, bundle_dpath=None*)

Bases: *_CocoObject*

Object representing a single annotation.

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes1')
>>> obj = dset.annots().objs[0]
>>> self = CocoAnnotation(obj, dset)
>>> print(f'self={self}')
```

class kwcoco.coco_image.CocoCategory(*obj, dset=None, bundle_dpath=None*)

Bases: *_CocoObject*

Object representing a single category.

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes1')
>>> obj = dset.categories().objs[0]
>>> self = CocoCategory(obj, dset)
>>> print(f'self={self}')
```

class kwcoco.coco_image.CocoTrack(*obj, dset=None, bundle_dpath=None*)

Bases: *_CocoObject*

Object representing a single track.

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes1')
>>> obj = dset.tracks().objs[0]
>>> self = CocoTrack(obj, dset)
>>> print(f'self={self}')
```

`annots()`

`kwcoco.coco_image._delay_load_imglike(bundle_dpath, obj, nodata_method=None)`

`kwcoco.coco_image.parse_quantity(expr)`

`kwcoco.coco_image.coerce_resolution(expr)`

2.1.2.9 `kwcoco.coco_objects1d` module

Vectorized ORM-like objects used in conjunction with `coco_dataset`.

This powers the `.images()`, `.videos()`, and `.annotation()` methods of `kwcoco.CocoDataset`.

See:

```
kwcoco.coco_dataset.MixinCocoObjects.categories()           kwcoco.coco_dataset.
MixinCocoObjects.videos()      kwcoco.coco_dataset.MixinCocoObjects.images()      kwcoco.
coco_dataset.MixinCocoObjects.annots() kwcoco.coco_dataset.MixinCocoObjects.tracks()
```

`class kwcoco.coco_objects1d.ObjectList1D(ids, dset, key)`

Bases: `NiceRepr`

Vectorized access to lists of dictionary objects

Lightweight reference to a set of object (e.g. annotations, images) that allows for convenient property access.

Types:

`ObjT` = `Ann` | `Img` | `Cat` # can be one of these types `ObjectList1D` gives us access to a `List[ObjT]`

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> # Both annots and images are object lists
>>> self = dset.annots()
>>> self = dset.images()
>>> # can call with a list of ids or not, for everything
>>> self = dset.annots([1, 2, 11])
>>> self = dset.images([1, 2, 3])
>>> self.lookup('id')
>>> self.lookup(['id'])
```

Parameters

- `ids` (`List[int]`) – list of ids
- `dset` (`CocoDataset`) – parent dataset

- **key** (*str*) – main object name (e.g. ‘images’, ‘annotations’)

property _id_to_obj

unique()

Removes any duplicates entries in this object

Returns

ObjectList1D

property ids

Returns: List[int]

property objs

Get the underlying object dictionary for each object.

Returns

all object dictionaries

Return type

List[ObjT]

take(*idxs*)

Take a subset by index

Returns

ObjectList1D

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().annots()
>>> assert len(self.take([0, 2, 3])) == 3
```

compress(*flags*)

Take a subset by flags

Returns

ObjectList1D

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().images()
>>> assert len(self.compress([True, False, True])) == 2
```

peek()

Return the first object dictionary

Returns

object dictionary

Return type

ObjT

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> self = dset.images()
>>> assert self.peek()['id'] == 1
>>> # Check that subsets return correct items
>>> sub0 = self.compress([i % 2 == 0 for i in range(len(self))])
>>> sub1 = self.compress([i % 2 == 1 for i in range(len(self))])
>>> assert sub0.peek()['id'] == 1
>>> assert sub1.peek()['id'] == 2
```

lookup(*key*, *default*=*NoParam*, *keepid*=*False*)

Lookup a list of object attributes

Parameters

- **key** (*str* | *Iterable*) – name of the property you want to lookup can also be a list of names, in which case we return a dict
- **default** – if specified, uses this value if it doesn't exist in an ObjT.
- **keepid** – if True, return a mapping from ids to the property

Returns

a list of whatever type the object is Dict[str, ObjT]

Return type

List[ObjT]

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> self = dset.annots()
>>> self.lookup('id')
>>> key = ['id']
>>> default = None
>>> self.lookup(key=['id', 'image_id'])
>>> self.lookup(key=['id', 'image_id'])
>>> self.lookup(key='foo', default=None, keepid=True)
>>> self.lookup(key=['foo'], default=None, keepid=True)
>>> self.lookup(key=['id', 'image_id'], keepid=True)
```

get(*key*, *default*=*NoParam*, *keepid*=*False*)

Lookup a list of object attributes

Parameters

- **key** (*str*) – name of the property you want to lookup
- **default** – if specified, uses this value if it doesn't exist in an ObjT.
- **keepid** – if True, return a mapping from ids to the property

Returns

a list of whatever type the object is Dict[str, ObjT]

Return type
List[ObjT]

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> self = dset.annots()
>>> self.get('id')
>>> self.get(key='foo', default=None, keepid=True)
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> import kwcoco
>>> dct_dset = kwcoco.CocoDataset.demo('vidshapes8', rng=303232)
>>> dct_dset.anns[3]['blorgo'] = 3
>>> dct_dset.annots().lookup('blorgo', default=None)
>>> for a in dct_dset.anns.values():
...     a['wizard'] = '10!'
>>> dset = dct_dset.view_sql(force_rewrite=1)
>>> assert dset.anns[3]['blorgo'] == 3
>>> assert dset.anns[3]['wizard'] == '10!'
>>> assert 'blorgo' not in dset.anns[2]
>>> dset.annots().lookup('blorgo', default=None)
>>> dset.annots().lookup('wizard', default=None)
>>> import pytest
>>> with pytest.raises(KeyError):
...     dset.annots().lookup('blorgo')
...     dset.annots().lookup('wizard')
>>> #self = dset.annots()
```

_iter_get(key, default=NoParam)

Iterator version of get, not in stable API yet.

set(key, values)

Assign a value to each annotation

Parameters

- **key** (*str*) – the annotation property to modify
- **values** (*Iterable* | *Any*) – an iterable of values to set for each annot in the dataset. If the item is not iterable, it is assigned to all objects.

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> self = dset.annots()
>>> self.set('my-key1', 'my-scalar-value')
>>> self.set('my-key2', np.random.rand(len(self)))
>>> print('dset.imgs = {}'.format(ub.urepr(dset.imgs, nl=1)))
>>> self.get('my-key2')
```

`_set(key, values)`
faster less safe version of set
`_lookup(key, default=NoParam)`

Example

```
>>> # xdoctest: +REQUIRES(--benchmark)
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('shapes256')
>>> self = annots = dset.annots()
>>> #
>>> import timerit
>>> ti = timerit.Timerit(100, bestof=10, verbose=2)
>>> #
>>> for timer in ti.reset('lookup'):
>>>     with timer:
>>>         self.lookup('image_id')
>>> #
>>> for timer in ti.reset('_lookup'):
>>>     with timer:
>>>         self._lookup('image_id')
>>> #
>>> for timer in ti.reset('image_id'):
>>>     with timer:
>>>         self.image_id
>>> #
>>> for timer in ti.reset('raw1'):
>>>     with timer:
>>>         key = 'image_id'
>>>         [self._dset.anns[_id][key] for _id in self._ids]
>>> #
>>> for timer in ti.reset('raw2'):
>>>     with timer:
>>>         anns = self._dset.anns
>>>         key = 'image_id'
>>>         [anns[_id][key] for _id in self._ids]
>>> #
>>> for timer in ti.reset('lut-gen'):
>>>     with timer:
>>>         _lut = self._obj_lut
>>>         objs = (_lut[_id] for _id in self._ids)
```

(continues on next page)

(continued from previous page)

```
>>> [obj[key] for obj in objs]
>>> #
>>> for timer in ti.reset('lut-gen-single'):
>>>     with timer:
>>>         _lut = self._obj_lut
>>>         [_lut[_id][key] for _id in self._ids]
```

attribute_frequency()

Compute the number of times each key is used in a dictionary

Returns

Dict[str, int]

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> self = dset.annots()
>>> attrs = self.attribute_frequency()
>>> print('attrs = {}'.format(ub.urepr(attrs, nl=1)))
```

class kwcoco.coco_objects1d.ObjectGroups(groups, dset)Bases: *NiceRepr*An object for holding a groups of *ObjectList1D* objects**Parameters**

- **groups** (*List[ObjectList1D]*) – list of object lists
- **dset** (*CocoDataset*) – parent dataset

_lookup(key)**lookup(key, default=NoParam)****class kwcoco.coco_objects1d.Categories(ids, dset)**Bases: *ObjectList1D*

Vectorized access to category attributes

SeeAlso:*kwcoco.coco_dataset.MixinCocoObjects.categories()***Example**

```
>>> from kwcoco.coco_objects1d import Categories # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo()
>>> ids = list(dset.cats.keys())
>>> self = Categories(ids, dset)
>>> print('self.name = {!r}'.format(self.name))
>>> print('self.supercategory = {!r}'.format(self.supercategory))
```

Parameters

- **ids** (*List[int]*) – list of category ids
- **dset** (*CocoDataset*) – parent dataset

property cids**property name****property supercategory****class kwcoco.coco_objects1d.Videos(ids, dset)**Bases: *ObjectList1D*

Vectorized access to video attributes

SeeAlso:[*kwcoco.coco_dataset.MixinCocoObjects.videos\(\)*](#)**Example**

```
>>> from kwcoco.coco_objects1d import Videos # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes5')
>>> ids = list(dset.index.videos.keys())
>>> self = Videos(ids, dset)
>>> print('self = {!r}'.format(self))
self = <Videos(num=5) at ...>
```

Parameters

- **ids** (*List[int]*) – list of video ids
- **dset** (*CocoDataset*) – parent dataset

property images**Returns**

ImageGroups

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('vidshapes8').videos()
>>> print(self.images)
<ImageGroups(n=8, m=2.0, s=0.0)>
```

class kwcoco.coco_objects1d.Images(ids, dset)Bases: *ObjectList1D*

Vectorized access to image attributes

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('photos')
>>> images = dset.images()
>>> print('images = {}'.format(images))
images = <Images(num=3)...>
>>> print('images.gname = {}'.format(images.gname))
images.gname = ['astro.png', 'carl.jpg', 'stars.png']
```

SeeAlso:

[kwcoco.coco_dataset.MixinCocoObjects.images\(\)](#)

Parameters

- **ids** (*List[int]*) – list of image ids
- **dset** (*CocoDataset*) – parent dataset

property coco_images

property gids

property gname

property gpath

property width

property height

property size

Example:

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().images()
>>> self._dset._ensure_imgsizes()
...
>>> print(self.size)
[(512, 512), (328, 448), (256, 256)]
```

property area

Returns

List[float]

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().images()
>>> self._dset._ensure_imgszie()
...
>>> print(self.area)
[262144, 146944, 65536]
```

property n_annots**Returns**

List[int]

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().images()
>>> print(ub.urepr(self.n_annots, nl=0))
[9, 2, 0]
```

property aids**Returns**

List[set]

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().images()
>>> print(ub.urepr(list(map(list, self.aids)), nl=0))
[[1, 2, 3, 4, 5, 6, 7, 8, 9], [10, 11], []]
```

property annots**Returns**

AnnotGroups

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().images()
>>> print(self.annot)
<AnnotGroups(n=3, m=3.7, s=3.9)>
```

class kwcoco.coco_objects1d.Annots(ids, dset)Bases: *ObjectList1D*

Vectorized access to annotation attributes

SeeAlso:[kwcoco.coco_dataset.MixinCocoObjects.annot\(\)](#)

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('photos')
>>> annots = dset.annots()
>>> print('annots = {}'.format(annots))
annots = <Annots(num=11)>
>>> image_ids = annots.lookup('image_id')
>>> print('image_ids = {}'.format(image_ids))
image_ids = [1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 2]
```

Parameters

- **ids** (*List[int]*) – list of annotation ids
- **dset** (*CocoDataset*) – parent dataset

property aids

The annotation ids of this column of annotations

property images

Get the column of images

Returns

Images

property image_id

property category_id

property gids

Get the column of image-ids

Returns

list of image ids

Return type

List[int]

property cids

Get the column of category-ids

Returns

List[int]

property cnames

Get the column of category names

Returns

List[int]

property category_names

Get the column of category names

Returns

List[int]

property detections

Get the kwimage-style detection objects

Returns

kwimage.Detections

Example

```
>>> # xdoctest: +REQUIRES(module:kwimage)
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('shapes32').annots([1, 2, 11])
>>> dets = self.detections
>>> print('dets.data = {!r}'.format(dets.data))
>>> print('dets.meta = {!r}'.format(dets.meta))
```

property boxes

Get the column of kwimage-style bounding boxes

Returns

kwimage.Boxes

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().annots([1, 2, 11])
>>> print(self.boxes)
<Boxes(xywh,
       array([[ 10,  10, 360, 490],
              [350,   5, 130, 290],
              [156, 130,  45,  18]]))>
```

property xywh

Returns raw boxes

DEPRECATED.

Returns

raw boxes in xywh format

Return type

List[List[int]]

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo().annots([1, 2, 11])
>>> print(self.xywh)
```

class kwcoco.coco_objects1d.Tracks(*ids*, *dset*)

Bases: *ObjectList1D*

Vectorized access to track attributes

SeeAlso:

`kwcoco.coco_dataset.MixinCocoObjects.tracks()`

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes1', num_tracks=4)
>>> tracks = dset.tracks()
>>> print('tracks = {}'.format(tracks))
tracks = <Tracks(num=4)>
>>> tracks.name
['track_001', 'track_002', 'track_003', 'track_004']
```

Parameters

- `ids (List[int])` – list of track ids
- `dset (CocoDataset)` – parent dataset

property track_ids

The annotation ids of this column of annotations

property name**property annots**

Example:

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes1', num_tracks=4)
>>> self = dset.tracks()
>>> print(self.annot)
<AnnotGroups(n=4, m=2.0, s=0.0)>
```

class kwcoco.coco_objects1d.AnnotGroups(groups, dset)

Bases: `ObjectGroups`

Annotation groups are vectorized lists of lists.

Each item represents a set of annotations that corresponds with something (i.e. belongs to a particular image).

Example

```
>>> from kwcoco.coco_objects1d import ImageGroups
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('photos')
>>> images = dset.images()
>>> # Requesting the "annots" property from a Images object
>>> # will return an AnnotGroups object
>>> group: AnnotGroups = images.annot
>>> # Printing the group gives info on the mean/std of the number
>>> # of items per group.
>>> print(group)
<AnnotGroups(n=3, m=3.7, s=3.9)...>
```

(continues on next page)

(continued from previous page)

```
>>> # Groups are fairly restrictive, they dont provide property level
>>> # access in many cases, but the lookup method is available
>>> print(group.lookup('id'))
[[1, 2, 3, 4, 5, 6, 7, 8, 9], [10, 11], []]
>>> print(group.lookup('image_id'))
[[1, 1, 1, 1, 1, 1, 1, 1], [2, 2], []]
>>> print(group.lookup('category_id'))
[[1, 2, 3, 4, 5, 5, 5, 5], [6, 4], []]
```

Parameters

- **groups** (*List[ObjectListID]*) – list of object lists
- **dset** (*CocoDataset*) – parent dataset

property cids

Get the grouped category ids for annotations in this group

Return type

List[List[int]]

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('photos').images().annots
>>> print('self.cids = {}'.format(ub.urepr(self.cids, nl=0)))
self.cids = [[1, 2, 3, 4, 5, 5, 5, 5], [6, 4], []]
```

property cnames

Get the grouped category names for annotations in this group

Return type

List[List[str]]

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('photos').images().annots
>>> print('self.cnames = {}'.format(ub.urepr(self.cnames, nl=0)))
self.cnames = [['astronaut', 'rocket', 'helmet', 'mouth', 'star', 'star', 'star', 'star', 'star'], ['astronomer', 'mouth'], []]
```

class kwcoco.coco_objects1d.ImageGroups(*groups, dset*)

Bases: *ObjectGroups*

Image groups are vectorized lists of other Image objects.

Each item represents a set of images that corresponds with something (i.e. belongs to a particular video).

Example

```
>>> from kwcoco.coco_objects1d import ImageGroups
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8')
>>> videos = dset.videos()
>>> # Requesting the "images" property from a Videos object
>>> # will return an ImageGroups object
>>> group: ImageGroups = videos.images
>>> # Printing the group gives info on the mean/std of the number
>>> # of items per group.
>>> print(group)
<ImageGroups(n=8, m=2.0, s=0.0)...>
>>> # Groups are fairly restrictive, they dont provide property level
>>> # access in many cases, but the lookup method is available
>>> print(group.lookup('id'))
[[1, 2], [3, 4], [5, 6], [7, 8], [9, 10], [11, 12], [13, 14], [15, 16]]
>>> print(group.lookup('video_id'))
[[1, 1], [2, 2], [3, 3], [4, 4], [5, 5], [6, 6], [7, 7], [8, 8]]
>>> print(group.lookup('frame_index'))
[[0, 1], [0, 1], [0, 1], [0, 1], [0, 1], [0, 1], [0, 1], [0, 1]]
```

Parameters

- **groups** (*List[ObjectListID]*) – list of object lists
- **dset** (*CocoDataset*) – parent dataset

2.1.2.10 kwcoco.coco_schema module

The place where the formal KWCOCO schema is defined.

CommandLine

```
python -m kwcoco.coco_schema
xdoctest -m kwcoco.coco_schema __doc__
```

Todo:

- [] Perhaps use [voluptuous](#) instead?
-

Example

```
>>> import kwcococo
>>> from kwcococo.coco_schema import COCO_SCHEMA
>>> import jsonschema
>>> dset = kwcococo.CocoDataset.demo('shapes1')
>>> # print('dset.dataset = {}'.format(ub.urepr(dset.dataset, nl=2)))
>>> COCO_SCHEMA.validate(dset.dataset)

>>> try:
>>>     jsonschema.validate(dset.dataset, schema=COCO_SCHEMA)
>>> except jsonschema.exceptions.ValidationError as ex:
>>>     vali_ex = ex
>>>     print('ex = {!r}'.format(ex))
>>>     raise
>>> except jsonschema.exceptions.SchemaError as ex:
>>>     print('ex = {!r}'.format(ex))
>>>     schema_ex = ex
>>>     print('schema_ex.instance = {}'.format(ub.urepr(schema_ex.instance, nl=-1)))
>>>     raise

>>> # Test the multispectral image defintino
>>> import copy
>>> dataset = dset.copy().dataset
>>> img = dataset['images'][0]
>>> img.pop('file_name')
>>> import pytest
>>> with pytest.raises(jsonschema.ValidationError):
>>>     COCO_SCHEMA.validate(dataset)
>>> import pytest
>>> img['auxiliary'] = [{'file_name': 'foobar'}]
>>> with pytest.raises(jsonschema.ValidationError):
>>>     COCO_SCHEMA.validate(dataset)
>>> img['name'] = 'asset-only images must have a name'
>>> COCO_SCHEMA.validate(dataset)
```

`kwcococo.coco_schema.deprecated(*args)`

`kwcococo.coco_schema.TUPLE(*args, **kw)`

2.1.2.11 `kwcococo.coco_sql_dataset` module

Finally got a baseline implementation of an SQLite backend for COCO datasets. This mostly plugs into my existing tools (as long as only read operations are used; haven't implemented writing yet) by duck-typing the dict API.

This solves the issue of forking and then accessing nested dictionaries in the JSON-style COCO objects. (When you access the dictionary Python will increment a reference count which triggers copy-on-write for whatever memory page that data happened to live in. Non-contiguous access had the effect of excessive memory copies).

For “medium sized” datasets it’s quite a bit slower. Running through a torch DataLoader with 4 workers for 10,000 images executes at a rate of 100Hz but takes 850MB of RAM. Using the duck-typed SQL backend only uses 500MB (which includes the cost of caching), but runs at 45Hz (which includes the benefit of caching).

However, once I scale up to 100,000 images I start seeing benefits. The in-memory dictionary interface chugs at 1.05HZ, and is taking more than 4GB of memory at the time I killed the process (eta was over an hour). The SQL backend ran at 45Hz and took about 3 minutes and used about 2.45GB of memory.

Without a cache, SQL runs at 30HZ and takes 400MB for 10,000 images, and for 100,000 images it gets 30Hz with 1.1GB. There is also a much larger startup time. I'm not exactly sure what it is yet, but its probably some preprocessing I'm doing.

Using a LRU cache we get 45Hz and 1.05GB of memory, so that's a clear win. We do need to be sure to disable the cache if we ever implement write mode.

I'd like to be a bit faster on the medium sized datasets (I'd really like to avoid caching rows, which is why the speed is currently semi-reasonable), but I don't think I can do any better than this because single-row lookup time is $O(\log(N))$ for sqlite, whereas its $O(1)$ for dictionaries. (I wish sqlite had an option to create a hash-table index for a table, but I dont think it does). I optimized as many of the dictionary operations as possible (for instance, iterating through keys, values, and items should be $O(N)$ instead of $O(N \log(N))$), but the majority of the runtime cost is in the single-row lookup time.

There are a few questions I still have if anyone has insight:

- Say I want to select a subset of K rows from a table with N entries, and I have a list of all of the rowids that I want. Is there any way to do this better than $O(K \log(N))$? I tried using a `SELECT col FROM table WHERE id IN (?, ?, ?, ?, ...)` filling in enough ? as there are rows in my subset. I'm not sure what the complexity of using a query like this is. I'm not sure what the `IN` implementation looks like. Can this be done more efficiently by with a temporary table and a `JOIN`?
- There really is no way to do $O(1)$ row lookup in sqlite right? Is there a way in PostgreSQL or some other backend sqlalchemy supports?

I found that PostgreSQL does support hash indexes: <https://www.postgresql.org/docs/13/indexes-types.html> I'm really not interested in setting up a global service though . I also found a 10-year old thread with a hash-index feature request for SQLite, which I unabashedly resurrected <http://sqlite.1065341.n5.nabble.com/Feature-request-hash-index-td23367.html> <https://web.archive.org/web/20210326010915/http://sqlite.1065341.n5.nabble.com/Feature-request-hash-index-td23367.html>

Todo:

- [] We get better speeds with raw SQL over alchemy. Can we mitigate the speed difference so we can take advantage of alchemy's expressiveness?
-

`class kwcoco.coco_sql_dataset.FallbackCocoBase`

Bases: `object`

`_decl_class_registry = {}`

`class kwcoco.coco_sql_dataset.Category(**kwargs)`

Bases: `Base`

A simple constructor that allows initialization from kwargs.

Sets attributes on the constructed instance using the names and values in kwargs.

Only keys that are present as attributes of the instance's class are allowed. These could be, for example, any mapped columns or relationships.

`id`

unique internal id

```
name
    unique external name or identifier

alias
    list of alter egos

supercategory
    coarser category name

_unstructured

_sa_class_manager = {'_unstructured':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'alias':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'id':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'name':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'supercategory':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>}

class kwcoco.coco_sql_dataset.KeypointCategory(**kwargs)
Bases: Base

A simple constructor that allows initialization from kwargs.

Sets attributes on the constructed instance using the names and values in kwargs.

Only keys that are present as attributes of the instance's class are allowed. These could be, for example, any mapped columns or relationships.

id
    unique internal id

name
    unique external name or identifier

alias
    list of alter egos

supercategory
    coarser category name

reflection_id
    if augmentation reflects the image, change keypoint id to this

_unstructured

_sa_class_manager = {'_unstructured':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'alias':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'id':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'name':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'reflection_id':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'supercategory':
<sqlalchemy.orm.attributes.InstrumentedAttribute object>}

class kwcoco.coco_sql_dataset.Video(**kwargs)
Bases: Base

A simple constructor that allows initialization from kwargs.

Sets attributes on the constructed instance using the names and values in kwargs.
```

Only keys that are present as attributes of the instance's class are allowed. These could be, for example, any mapped columns or relationships.

id

unique internal id

name**caption****width****height****_unstructured**

```
_sa_class_manager = {'_unstructured':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'caption':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'height':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'id':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'name':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'width':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>}
```

class kwcoco.coco_sql_dataset.Image(kwargs)**

Bases: Base

A simple constructor that allows initialization from kwargs.

Sets attributes on the constructed instance using the names and values in kwargs.

Only keys that are present as attributes of the instance's class are allowed. These could be, for example, any mapped columns or relationships.

id

unique internal id

name**file_name****width****height****video_id****timestamp****frame_index****channels**

See ChannelSpec

warp_img_to_vid

See TransformSpec

auxiliary**_unstructured**

```
_sa_class_manager = {'_unstructured':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'auxiliary':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'channels':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'file_name':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'frame_index':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'height':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'id':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'name':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'timestamp':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'video_id':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'warp_img_to_vid':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'width':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>}
```

```
class kwcoco.coco_sql_dataset.Track(**kwargs)
```

Bases: Base

A simple constructor that allows initialization from kwargs.

Sets attributes on the constructed instance using the names and values in kwargs.

Only keys that are present as attributes of the instance's class are allowed. These could be, for example, any mapped columns or relationships.

id

unique internal id

name

_unstructured

```
_sa_class_manager = {'_unstructured':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'id':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'name':  
<sqlalchemy.orm.attributes.InstrumentedAttribute object>}
```

```
class kwcoco.coco_sql_dataset.Annotation(**kwargs)
```

Bases: Base

A simple constructor that allows initialization from kwargs.

Sets attributes on the constructed instance using the names and values in kwargs.

Only keys that are present as attributes of the instance's class are allowed. These could be, for example, any mapped columns or relationships.

id

image_id

category_id

track_id

segmentation

keypoints

bbox

```
_bbox_x
 bbox_y
 bbox_w
 bbox_h
 score
 weight
 prob
 iscrowd
 caption
 _unstructured

_sa_class_manager = {'bbox_h': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'bbox_w': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'bbox_x': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'bbox_y': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, '_unstructured': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'bbox': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'caption': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'category_id': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'id': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'image_id': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'iscrowd': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'keypoints': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'prob': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'score': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'segmentation': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'track_id': <sqlalchemy.orm.attributes.InstrumentedAttribute object>, 'weight': <sqlalchemy.orm.attributes.InstrumentedAttribute object>}
```

`kwcoco.coco_sql_dataset.cls`

alias of `Annotation`

`kwcoco.coco_sql_dataset.orm_to_dict(obj)`

`kwcoco.coco_sql_dataset.dict_restructure(item)`

Removes the unstructured field so the API is transparent to the user.

`kwcoco.coco_sql_dataset._orm_yielder(query, size=300)`

TODO: figure out the best way to yield, in batches or otherwise

`kwcoco.coco_sql_dataset._raw_yielder(result, size=300)`

TODO: figure out the best way to yield, in batches or otherwise

`kwcoco.coco_sql_dataset._new_proxy_cache()`

By returning None, we wont use item caching

`class kwcoco.coco_sql_dataset.SqlListProxy(session, cls)`

Bases: `NiceRepr`

A view of an SQL table that behaves like a Python list

```
class kwcoc.coco_sql_dataset.SqlDictProxy(session, cls, keyattr=None, ignore_null=False)
```

Bases: *DictLike*

Duck-types an SQL table as a dictionary of dictionaries.

The key is specified by an indexed column (by default it is the *id* column). The values are dictionaries containing all data for that row.

Note: With SQLite indexes are B-Trees so lookup is O(log(N)) and not O(1) as will regular dictionaries. Iteration should still be O(N), but databases have much more overhead than Python dictionaries.

Parameters

- **session** (*sqlalchemy.orm.session.Session*) – the sqlalchemy session
- **cls** (*Type*) – the declarative sqlalchemy table class
- **keyattr** (*Column*) – the indexed column to use as the keys
- **ignore_null** (*bool*) – if True, ignores any keys set to NULL, otherwise NULL keys are allowed.

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoc.coco_sql_dataset import * # NOQA
>>> import pytest
>>> sql_dset, dct_dset = demo(num=10)
>>> proxy = sql_dset.index.anns
```

```
>>> keys = list(proxy.keys())
>>> values = list(proxy.values())
>>> items = list(proxy.items())
>>> item_keys = [t[0] for t in items]
>>> item_vals = [t[1] for t in items]
>>> lut_vals = [proxy[key] for key in keys]
>>> assert item_vals == lut_vals == values
>>> assert item_keys == keys
>>> assert len(proxy) == len(keys)
```

```
>>> goodkey1 = keys[1]
>>> badkey1 = -1000000000000
>>> badkey2 = 'foobarbazbiz'
>>> assert goodkey1 in proxy
>>> assert badkey1 not in proxy
>>> assert badkey2 not in proxy
>>> with pytest.raises(KeyError):
>>>     proxy[badkey1]
>>> with pytest.raises(KeyError):
>>>     proxy[badkey2]
>>> badkey3 = object()
>>> assert badkey3 not in proxy
```

(continues on next page)

(continued from previous page)

```
>>> with pytest.raises(KeyError):
>>>     proxy[badkey3]

>>> # xdoctest: +SKIP
>>> from kwcoco.coco_sql_dataset import _benchmark_dict_proxy_ops
>>> ti = _benchmark_dict_proxy_ops(proxy)
>>> print('ti.measures = {}'.format(ub.urepr(ti.measures, nl=2, align=':', precision=6)))
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> import kwcoco
>>> # Test the variant of the SqlDictProxy where we ignore None keys
>>> # This is the case for name_to_img and file_name_to_img
>>> dct_dset = kwcoco.CocoDataset.demo('shapes1')
>>> dct_dset.add_image(name='no_file_image1')
>>> dct_dset.add_image(name='no_file_image2')
>>> dct_dset.add_image(name='no_file_image3')
>>> sql_dset = dct_dset.view_sql(memory=True)
>>> assert len(dct_dset.index.imgs) == 4
>>> assert len(dct_dset.index.file_name_to_img) == 1
>>> assert len(dct_dset.index.name_to_img) == 3
>>> assert len(sql_dset.index.imgs) == 4
>>> assert len(sql_dset.index.file_name_to_img) == 1
>>> assert len(sql_dset.index.name_to_img) == 3
```

```
>>> proxy = sql_dset.index.file_name_to_img
>>> assert len(list(proxy.keys())) == 1
>>> assert len(list(proxy.values())) == 1
```

```
>>> proxy = sql_dset.index.name_to_img
>>> assert len(list(proxy.keys())) == 3
>>> assert len(list(proxy.values())) == 3
```

```
>>> proxy = sql_dset.index.imgs
>>> assert len(list(proxy.keys())) == 4
>>> assert len(list(proxy.values())) == 4
```

_uncached_getitem(key)

The uncached getitem call

`keys()`

`values()`

`items()`

```
class kwcoco.coco_sql_dataset.SqlIdGroupDictProxy(session, valattr, keyattr, parent_keyattr=None,
                                                 order_attr=None, order_id=None)
```

Bases: *DictLike*

Similar to *SqlDictProxy*, but maps ids to groups of other ids.

Simulates a dictionary that maps ids of a parent table to all ids of another table corresponding to rows where a specific column has that parent id.

The items in the group can be sorted by the *order_attr* if specified. The *order_attr* can belong to another table if *parent_order_id* and *self_order_id* are specified.

For example, imagine two tables: images with one column (id) and annotations with two columns (id, image_id). This class can help provide a mapping from each *image.id* to a *Set[annotation.id]* where those annotation rows have *annotation.image_id = image.id*.

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> sql_dset, dct_dset = demo(num=10)
>>> proxy = sql_dset.index.gid_to_aids
```

```
>>> keys = list(proxy.keys())
>>> values = list(proxy.values())
>>> items = list(proxy.items())
>>> item_keys = [t[0] for t in items]
>>> item_vals = [t[1] for t in items]
>>> lut_vals = [proxy[key] for key in keys]
>>> assert item_vals == lut_vals == values
>>> assert item_keys == keys
>>> assert len(proxy) == len(keys)
```

```
>>> # xdoctest: +SKIP
>>> from kwcoco.coco_sql_dataset import _benchmark_dict_proxy_ops
>>> ti = _benchmark_dict_proxy_ops(proxy)
>>> print('ti.measures = {}'.format(ub.urepr(ti.measures, nl=2, align=':', precision=6)))
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> import kwcoco
>>> # Test the group sorted variant of this by using vidid_to_gids
>>> # where the "gids" must be sorted by the image frame indexes
>>> dct_dset = kwcoco.CocoDataset.demo('vidshapes1')
>>> dct_dset.add_image(name='frame-index-order-demo1', frame_index=-30, video_id=1)
>>> dct_dset.add_image(name='frame-index-order-demo2', frame_index=10, video_id=1)
>>> dct_dset.add_image(name='frame-index-order-demo3', frame_index=3, video_id=1)
>>> dct_dset.add_video(name='empty-video1')
>>> dct_dset.add_video(name='empty-video2')
>>> dct_dset.add_video(name='empty-video3')
```

(continues on next page)

(continued from previous page)

```
>>> sql_dset = dct_dset.view_sql(memory=True)
>>> orig = dct_dset.index.vidid_to_gids
>>> proxy = sql_dset.index.vidid_to_gids
>>> from kwcoco.util.util_json import indexable_allclose
>>> assert indexable_allclose(orig, dict(proxy))
>>> items = list(proxy.items())
>>> vals = list(proxy.values())
>>> keys = list(proxy.keys())
>>> assert len(keys) == len(vals)
>>> assert dict(zip(keys, vals)) == dict(items)
```

Parameters

- **session** (*sqlalchemy.orm.session.Session*) – the sqlalchemy session
- **valattr** (*InstrumentedAttribute*) – The column to lookup as a value
- **keyattr** (*InstrumentedAttribute*) – The column to use as a key
- **parent_keyattr** (*InstrumentedAttribute | None*) – The column of the table corresponding to the key. If unspecified the column in the indexed table is used which may be less efficient.
- **order_attr** (*InstrumentedAttribute | None*) – This is the attribute that the returned results will be ordered by
- **order_id** (*InstrumentedAttribute | None*) – if order_attr belongs to another table, then this must be a column of the value table that corresponds to the primary key of the table used for ordering (e.g. when ordering annotations by image frame index, this must be the annotation image id)

_uncached_getitem(key)

getitem without the cache

keys()**items()****values()****class kwcoco.coco_sql_dataset.CocoSqlIndex**Bases: *object*Simulates the dictionary provided by [kwcoco.coco_dataset.CocoIndex](#)**build(parent)****_set_alchemy_mode(mode)****kwcoco.coco_sql_dataset._handle_sql_uri(uri)**

Temporary function to deal with URI. Modern tools seem to use RFC 3968 URIs, but sqlalchemy uses RFC 1738. Attempt to gracefully handle special cases. With a better understanding of the above specs, this function may be able to be written more eloquently.

class kwcoco.coco_sql_dataset.CocoSqlDatabase(uri=None, tag=None, img_root=None)Bases: *AbstractCocoDataset, MixinCocoAccessors, MixinCocoObjects, MixinCocoStats, MixinCocoDraw, NiceRepr*

Provides an API nearly identical to `kwcoco.CocoDatabase`, but uses an SQL backend data store. This makes it robust to copy-on-write memory issues that arise when forking, as discussed in¹.

Note: By default constructing an instance of the `CocoSqlDatabase` does not create a connection to the database. Use the `connect()` method to open a connection.

References

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> sql_dset, dct_dset = demo()
>>> dset1, dset2 = sql_dset, dct_dset
>>> tag1, tag2 = 'dset1', 'dset2'
>>> assert_dsets_allclose(sql_dset, dct_dset)
```

`MEMORY_URI` = 'sqlite:///memory:'

`classmethod coerce(data, backend=None)`

Create an SQL CocoDataset from the input pointer.

Example

```
import kwcoco dset = kwcoco.CocoDataset.demo('shapes8') data = dset.fpath self = CocoSqlDatabase.coerce(data)
```

```
from kwcoco.coco_sql_dataset import CocoSqlDatabase import kwcoco dset = kwcoco.CocoDataset.coerce('spacenet7.kwcoco.json')
```

```
self = CocoSqlDatabase.coerce(dset)
```

```
from kwcoco.coco_sql_dataset import CocoSqlDatabase sql_dset = CocoSqlDatabase.coerce('spacenet7.kwcoco.json')
```

```
# from kwcoco.coco_sql_dataset import CocoSqlDatabase import kwcoco sql_dset = kwcoco.CocoDataset.coerce('_spacenet7.kwcoco.view.v006.sqlite')
```

`disconnect()`

Drop references to any SQL or cache objects

`connect(readonly=False, verbose=0)`

Connects this instance to the underlying database.

¹ <https://github.com/pytorch/pytorch/issues/13246>

References

details on read only mode, some of these didnt seem to work <https://github.com/sqlalchemy/sqlalchemy/blob/master/lib/sqlalchemy/dialects/sqlite/pysqlite.py#L71> https://github.com/pudo/dataset/issues/136 <https://writeonly.wordpress.com/2009/07/16/simple-read-only-sqlalchemy-sessions/>

CommandLine

```
KWCOCO_WITH_POSTGRESQL=1 xdoctest -m /home/joncrall/code/kwcoco/kwcoco/coco_sql_
dataset.py CocoSqlDatabase.connect
```

Example

```
>>> # xdoctest: +REQUIRES(env:KWCOCO_WITH_POSTGRESQL)
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(module:psycopg2)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> dset = CocoSqlDatabase('postgresql+psycopg2://kwcoco:kwcoco_'
->>> pw@localhost:5432/mydb')
>>> self = dset
>>> dset.connect(verbose=1)
```

property fpath

delete(verbose=0)

table_names()

populate_from(dset, verbose=1)

Copy the information in a CocoDataset into this SQL database.

CommandLine

```
xdoctest -m kwcoco.coco_sql_dataset CocoSqlDatabase.populate_from:1
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import _benchmark_dset_readtime # NOQA
>>> import kwcoco
>>> from kwcoco.coco_sql_dataset import *
>>> dset2 = dset = kwcoco.CocoDataset.demo()
>>> dset2.clear_annotations()
>>> dset1 = self = CocoSqlDatabase('sqlite:///memory:')
>>> self.connect()
>>> self.populate_from(dset)
>>> dset1_images = list(dset1.dataset['images'])
>>> print('dset1_images = {}'.format(ub.repr(dset1_images, nl=1)))
>>> print(dset2.dumps(newlines=True))
```

(continues on next page)

(continued from previous page)

```
>>> assert_dsets_allclose(dset1, dset2, tag1='sql', tag2='dct')
>>> ti_sql = _benchmark_dset_readtime(dset1, 'sql')
>>> ti_dct = _benchmark_dset_readtime(dset2, 'dct')
>>> print('ti_sql.rankings = {}'.format(ub.urepr(ti_sql.rankings, nl=2,
...precision=6, align=':')))
>>> print('ti_dct.rankings = {}'.format(ub.urepr(ti_dct.rankings, nl=2,
...precision=6, align=':')))
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import _benchmark_dset_readtime # NOQA
>>> import kwcoco
>>> from kwcoco.coco_sql_dataset import *
>>> dset2 = dset = kwcoco.CocoDataset.demo('vidshapes1')
>>> dset1 = self = CocoSqlDatabase('sqlite:///:memory:')
>>> self.connect()
>>> self.populate_from(dset)
>>> for tablename in dset1.dataset.keys():
>>>     print(tablename)
>>>     table = dset1.pandas_table(tablename)
>>>     print(table)
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import _benchmark_dset_readtime # NOQA
>>> import kwcoco
>>> from kwcoco.coco_sql_dataset import *
>>> dset2 = dset = kwcoco.CocoDataset.demo()
>>> dset1 = self = CocoSqlDatabase('sqlite:///:memory:')
>>> self.connect()
>>> self.populate_from(dset)
>>> assert_dsets_allclose(dset1, dset2, tag1='sql', tag2='dct')
>>> ti_sql = _benchmark_dset_readtime(dset1, 'sql')
>>> ti_dct = _benchmark_dset_readtime(dset2, 'dct')
>>> print('ti_sql.rankings = {}'.format(ub.urepr(ti_sql.rankings, nl=2,
...precision=6, align=':')))
>>> print('ti_dct.rankings = {}'.format(ub.urepr(ti_dct.rankings, nl=2,
...precision=6, align=':')))
```

CommandLine

```
KWCOCO_WITH_POSTGRESQL=1 xdoctest -m /home/joncrall/code/kwcoco/kwcoco/coco_sql_
dataset.py CocoSqlDatabase.populate_from:1
```

Example

```
>>> # xdoctest: +REQUIRES(env:KWCOCO_WITH_POSTGRESQL)
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(module:psycopg2)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> import kwcoco
>>> dset = dset2 = kwcoco.CocoDataset.demo()
>>> self = dset1 = CocoSqlDatabase('postgresql+psycopg2://kwcoco:kwcoco_
-pw@localhost:5432/test_populate')
>>> self.delete(verbose=1)
>>> self.connect(verbose=1)
>>> #self.populate_from(dset)
```

property dataset

property anns

property cats

property imgs

property name_to_cat

pandas_table(table_name, strict=False)

Loads an entire SQL table as a pandas DataFrame

Parameters

table_name (*str*) – name of the table

Returns

pandas.DataFrame

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> self, dset = demo()
>>> table_df = self.pandas_table('annotations')
>>> print(table_df)
>>> table_df = self.pandas_table('categories')
>>> print(table_df)
>>> table_df = self.pandas_table('videos')
>>> print(table_df)
>>> table_df = self.pandas_table('images')
>>> print(table_df)
```

(continues on next page)

(continued from previous page)

```
>>> table_df = self.pandas_table('tracks')
>>> print(table_df)
```

`_raw_table(table_name)`

`_raw_tables()`

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> import pandas as pd
>>> self, dset = demo()
>>> targets = self._raw_tables()
>>> for tblname, table in targets.items():
...     print(f'tblname={tblname}')
...     print(pd.DataFrame(table))
```

`_column_lookup(tablename, key, rowids, default=NoParam, keepid=False)`

Convinience method to lookup only a single column of information

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> self, dset = demo(10)
>>> tablename = 'annotations'
>>> key = 'category_id'
>>> rowids = list(self.anns.keys())[::-3]
>>> cids1 = self._column_lookup(tablename, key, rowids)
>>> cids2 = self.annots(rowids).get(key)
>>> cids3 = dset.annots(rowids).get(key)
>>> assert cids3 == cids2 == cids1
>>> # Test json columns work
>>> vals1 = self._column_lookup(tablename, 'bbox', rowids)
>>> vals2 = self.annots(rowids).lookup('bbox')
>>> vals3 = dset.annots(rowids).lookup('bbox')
>>> assert vals1 == vals2 == vals3
>>> vals1 = self._column_lookup(tablename, 'segmentation', rowids)
>>> vals2 = self.annots(rowids).lookup('segmentation')
>>> vals3 = dset.annots(rowids).lookup('segmentation')
>>> assert vals1 == vals2 == vals3
```

`_all_rows_column_lookup(tablename, keys)`

Convinience method to look up all rows from a table and only a few columns.

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> self, dset = demo(10)
>>> tablename = 'annotations'
>>> keys = ['id', 'category_id']
>>> rows = self._all_rows_column_lookup(tablename, keys)
```

tabular_targets()

Convinience method to create an in-memory summary of basic annotation properties with minimal SQL overhead.

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> self, dset = demo()
>>> targets = self.tabular_targets()
>>> print(targets.pandas())
```

_table_names()**property bundle_dpath****property data_fpath**

data_fpath is an alias of fpath

_orig_coco_fpath()

Hack to reconstruct the original name. Makes assumptions about how naming is handled elsewhere. There should be centralized logic about how to construct side-car names that can be queried for inversed like this.

_abc_impl = <_abc._abc_data object>**_cached_hashid()**

Compatibility with the way the exiting cached hashid in the coco dataset is used. Both of these functions are private and subject to change (and need optimization).

`kwcoco.coco_sql_dataset.cached_sql_coco_view(dct_db_fpath=None, sql_db_fpath=None, dset=None, force_rewrite=False, backend=None)`

Attempts to load a cached SQL-View dataset, only loading and converting the json dataset if necessary.

`kwcoco.coco_sql_dataset.ensure_sql_coco_view(dset, db_fpath=None, force_rewrite=False, backend=None)`

Create a cached on-disk SQL view of an on-disk COCO dataset.

DEPRECATE, use cache function instead

Note: This function is fragile. It depends on looking at file modified timestamps to determine if it needs to write the dataset.

`kwcoco.coco_sql_dataset.demo(num=10, backend=None)`

`kwcoco.coco_sql_dataset.assert_dsets_allclose(dset1, dset2, tag1='dset1', tag2='dset2')`

`kwcoco.coco_sql_dataset._benchmark_dset_readtime(dset, tag='?', n=4, post_iterate=False)`

Helper for understanding the time differences between backends

Note: `post_iterate` ensures that all of the returned data is looked at by the python interpreter. Makes this a more fair comparison because python can just return pointers to the data, but only in the case where most of the data will be touched. For one attribute lookups it is not a good test.

`kwcoco.coco_sql_dataset._benchmark_dict_proxy_ops(proxy)`

Get insight on the efficiency of operations

`kwcoco.coco_sql_dataset.devcheck()`

Scratch work for things that should eventually become unit or doc tests

```
from kwcoco.coco_sql_dataset import * # NOQA
self, dset = demo()
```

2.1.2.12 `kwcoco.compat_dataset` module

A wrapper around the basic kwcoco dataset with a pycocotools API.

We do not recommend using this API because it has some idiosyncrasies, where names can be misleading and APIs are not always clear / efficient: e.g.

- (1) `catToImgs` returns integer image ids but `imgToAnns` returns annotation dictionaries.
- (2) `showAnns` takes a dictionary list as an argument instead of an integer list

The cool thing is that this extends the kwcoco API so you can drop this for compatibility with the old API, but you still get access to all of the kwcoco API including dynamic addition / removal of categories / annotations / images.

`class kwcoco.compat_dataset.COCO(annotation_file=None, **kw)`

Bases: `CocoDataset`

A wrapper around the basic kwcoco dataset with a pycocotools API.

Example

```
>>> from kwcoco.compat_dataset import * # NOQA
>>> import kwcoco
>>> basic = kwcoco.CocoDataset.demo('shapes8')
>>> self = COCO(basic.dataset)
>>> self.info()
>>> print('self.imgToAnns = {!r}'.format(self.imgToAnns[1]))
>>> print('self.catToImgs = {!r}'.format(self.catToImgs))
```

`createIndex()`

`info()`

Print information about the annotation file.

`property imgToAnns`

property catToImgs

unlike the name implies, this actually goes from category to image ids Name retained for backward compatibility

getAnnIds(imgIds=[], catIds=[], areaRng=[], iscrowd=None)

Get ann ids that satisfy given filter conditions. default skips that filter

Parameters

- **imgIds** (*List[int]*) – get anns for given imgs
- **catIds** (*List[int]*) – get anns for given cats
- **areaRng** (*List[float]*) – get anns for given area range (e.g. [0 inf])
- **iscrowd** (*bool | None*) – get anns for given crowd label (False or True)

Returns

integer array of ann ids

Return type

List[int]

Example

```
>>> from kwcoco.compat_dataset import * # NOQA
>>> import kwcoco
>>> self = COCO(kwcoco.CocoDataset.demo('shapes8').dataset)
>>> self.getAnnIds()
>>> self.getAnnIds(imgIds=1)
>>> self.getAnnIds(imgIds=[1])
>>> self.getAnnIds(catIds=[3])
```

getCatIds(catNms=[], supNms=[], catIds=[])

filtering parameters. default skips that filter.

Parameters

- **catNms** (*List[str]*) – get cats for given cat names
- **supNms** (*List[str]*) – get cats for given supercategory names
- **catIds** (*List[int]*) – get cats for given cat ids

Returns

integer array of cat ids

Return type

List[int]

Example

```
>>> from kwcoco.compat_dataset import * # NOQA
>>> import kwcoco
>>> self = COCO(kwcoco.CocoDataset.demo('shapes8').dataset)
>>> self.getCatIds()
>>> self.getCatIds(catNms=['superstar'])
>>> self.getCatIds(supNms=['raster'])
>>> self.getCatIds(catIds=[3])
```

getImgIds(imgIds=[], catIds=[])

Get img ids that satisfy given filter conditions.

Parameters

- **imgIds** (*List[int]*) – get imgs for given ids
- **catIds** (*List[int]*) – get imgs with all given cats

Returns

integer array of img ids

Return type

List[int]

Example

```
>>> from kwcoco.compat_dataset import * # NOQA
>>> import kwcoco
>>> self = COCO(kwcoco.CocoDataset.demo('shapes8').dataset)
>>> self.getImgIds(imgIds=[1, 2])
>>> self.getImgIds(catIds=[3, 6, 7])
>>> self.getImgIds(catIds=[3, 6, 7], imgIds=[1, 2])
```

loadAnns(ids=[])

Load anns with the specified ids.

Parameters

ids (*List[int]*) – integer ids specifying anns

Returns

loaded ann objects

Return type

List[dict]

loadCats(ids=[])

Load cats with the specified ids.

Parameters

ids (*List[int]*) – integer ids specifying cats

Returns

loaded cat objects

Return type

List[dict]

loadImgs(*ids*=[])

Load anns with the specified ids.

Parameters

ids (*List[int]*) – integer ids specifying img

Returns

loaded img objects

Return type

List[dict]

showAnns(*anns*, *draw_bbox*=*False*)

Display the specified annotations.

Parameters

anns (*List[Dict]*) – annotations to display

loadRes(*resFile*)

Load result file and return a result api object.

Parameters

resFile (*str*) – file name of result file

Returns

res result api object

Return type

object

download(*tarDir*=*None*, *imgIds*=[])

Download COCO images from mscoco.org server.

Parameters

- **tarDir** (*str* | *PathLike* | *None*) – COCO results directory name
- **imgIds** (*list*) – images to be downloaded

loadNumpyAnnotations(*data*)

Convert result data from a numpy array [Nx7] where each row contains {imageID,x1,y1,w,h,score,class}

Parameters

data (*numpy.ndarray*)

Returns

annotations (python nested list)

Return type

List[Dict]

annToRLE(*ann*)

Convert annotation which can be polygons, uncompressed RLE to RLE.

Returns

kwimage.Mask

Note:

- This requires the C-extensions for *kwimage* to be installed (i.e.

`pip install kwimage_ext`) due to the need to interface with the bytes RLE format.

Example

```
>>> from kwcoco.compat_dataset import * # NOQA
>>> import kwcoco
>>> self = COCO(kwcoco.CocoDataset.demo('shapes8').dataset)
>>> try:
>>>     rle = self.annToRLE(self.anns[1])
>>> except NotImplementedError:
>>>     import pytest
>>>     pytest.skip('missing kwimage c-extensions')
>>> else:
>>>     assert len(rle['counts']) > 2
>>> # xdoctest: +REQUIRES(module:pycocotools)
>>> self.conform(legacy=True)
>>> orig = self._aspycoco().annToRLE(self.anns[1])
```

`annToMask(ann)`

Convert annotation which can be polygons, uncompressed RLE, or RLE to binary mask.

Returns

binary mask (numpy 2D array)

Return type

ndarray

Note: The mask is returned as a fortran (F-style) array with the same dimensions as the parent image.

`_abc_impl = <_abc._abc_data object>`

2.1.2.13 `kwcoco.exceptions module`

`exception kwcoco.exceptions.AddError`

Bases: `ValueError`

Generic error when trying to add a category/annotation/image

`exception kwcoco.exceptions.DuplicateAddError`

Bases: `ValueError`

Error when trying to add a duplicate item

`exception kwcoco.exceptions.InvalidAddError`

Bases: `ValueError`

Error when trying to invalid data

2.1.2.14 kwcoco.kpf module

WIP:

Conversions to and from KPF format.

`kwcoco.kpf.coco_to_kpf(coco_dset)`

```
import kwcoco coco_dset = kwcoco.CocoDataset.demo('shapes8')
```

`kwcoco.kpf.demo()`

2.1.2.15 kwcoco.kw18 module

A helper for converting COCO to / from KW18 format.

KW18 File Format <https://docs.google.com/spreadsheets/d/1DFCwoTKnDv8qfy3raM7QXtir2Fjfj9j8-z8px5Bu0q8/edit#gid=10>

The kw18.trk files are text files, space delimited; each row is one frame of one track and all rows have the same number of columns. The fields are:

| | |
|-----------------|---|
| 01) track_ID | : identifies the track |
| 02) num_frames: | number of frames in the track |
| 03) frame_id | : frame number for this track sample |
| 04) loc_x | : X-coordinate of the track (image/ground coords) |
| 05) loc_y | : Y-coordinate of the track (image/ground coords) |
| 06) vel_x | : X-velocity of the object (image/ground coords) |
| 07) vel_y | : Y-velocity of the object (image/ground coords) |
| 08) obj_loc_x | : X-coordinate of the object (image coords) |
| 09) obj_loc_y | : Y-coordinate of the object (image coords) |
| 10) bbox_min_x | : minimum X-coordinate of bounding box (image coords) |
| 11) bbox_min_y | : minimum Y-coordinate of bounding box (image coords) |
| 12) bbox_max_x | : maximum X-coordinate of bounding box (image coords) |
| 13) bbox_max_y | : maximum Y-coordinate of bounding box (image coords) |
| 14) area | : area of object (pixels) |
| 15) world_loc_x | : X-coordinate of object in world |
| 16) world_loc_y | : Y-coordinate of object in world |
| 17) world_loc_z | : Z-coordiante of object in world |
| 18) timestamp | : timestamp of frame (frames) |

For the location **and** velocity of **object** centroids, use fields 4-7.

Bounding box **is** specified using coordinates of the top-left **and** bottom right corners. Fields 15-17 may be ignored.

The kw19.trk **and** kw20.trk files, when present, add the following field(s):

19) **object** class: estimated **class of** the **object**, either 1 (person), 2 (vehicle), **or** 3 (other).

20) Activity ID -- refer to activities.txt **for** index **and** list of activities.

`class kwcoco.kw18.KW18(data)`

Bases: `DataFrameArray`

A DataFrame like object that stores KW18 column data

Example

```
>>> import kwcoco
>>> from kwcoco.kw18 import KW18
>>> coco_dset = kwcoco.CocoDataset.demo('shapes')
>>> kw18_dset = KW18.from_coco(coco_dset)
>>> print(kw18_dset.pandas())
```

Parameters

data – the kw18 data frame.

```
DEFAULT_COLUMNS = ['track_id', 'track_length', 'frame_number',
'tracking_plane_loc_x', 'tracking_plane_loc_y', 'velocity_x', 'velocity_y',
'image_loc_x', 'image_loc_y', 'img_bbox_tl_x', 'img_bbox_tl_y', 'img_bbox_br_x',
'img_bbox_br_y', 'area', 'world_loc_x', 'world_loc_y', 'world_loc_z', 'timestamp',
'confidence', 'object_type_id', 'activity_type_id']
```

classmethod demo()

classmethod from_coco(coco_dset)

to_coco(image_paths=None, video_name=None)

Translates a kw18 files to a CocoDataset.

Note: kw18 does not contain complete information, and as such the returned coco dataset may need to be augmented.

Parameters

- **image_paths** (*Dict[int, str] | None*) – if specified, maps frame numbers to image file paths.
- **video_name** (*str | None*) – if specified records the name of the video this kw18 belongs to

Todo:

- [X] allow kwargs to specify path to frames / videos
-

Example

```
>>> from kwcoco.kw18 import KW18
>>> import ubelt as ub
>>> import kwimage
>>> import kwcoco
>>> # Prep test data - autogen a demo kw18 and write it to disk
>>> dpath = ub.Path.appdir('kwcoco/kw18').ensuredir()
>>> kw18_fpath = ub.Path(dpath) / 'test.kw18'
>>> KW18.demo().dump(kw18_fpath)
>>> #
>>> # Load the kw18 file
>>> self = KW18.load(kw18_fpath)
```

(continues on next page)

(continued from previous page)

```
>>> # Pretend that these image correspond to kw18 frame numbers
>>> frame_names= kwcoco.CocoDataset.demo('shapes8').images().lookup('file_name')
>>> frame_ids = sorted(set(self['frame_number']))
>>> image_paths = dict(zip(frame_ids, frame_names))
>>> #
>>> # Convert the kw18 to kwcoco and specify paths to images
>>> coco_dset = self.to_coco(image_paths=image_paths, video_name='dummy.mp4')
>>> #
>>> # Now we can draw images
>>> canvas = coco_dset.draw_image(1)
>>> # xdoctest: +REQUIRES(--draw)
>>> kwimage.imwrite('foo.jpg', canvas)
>>> # Draw all images
>>> for gid in coco_dset.imgs.keys():
>>>     canvas = coco_dset.draw_image(gid)
>>>     fpath = dpath / 'gid_{}.jpg'.format(gid)
>>>     print('write fpath = {!r}'.format(fpath))
>>>     kwimage.imwrite(fpath, canvas)
```

classmethod `load(file)`**Example**

```
>>> import kwcoco
>>> from kwcoco.kw18 import KW18
>>> coco_dset = kwcoco.CocoDataset.demo('shapes')
>>> kw18_dset = KW18.from_coco(coco_dset)
>>> print(kw18_dset.pandas())
```

classmethod `loads(text)`**Example**

```
>>> self = KW18.demo()
>>> text = self.dumps()
>>> self2 = KW18.loads(text)
>>> empty = KW18.loads('')
```

dump(file)**dumps()**

Example

```
>>> self = KW18.demo()  
>>> text = self.dumps()  
>>> print(text)
```

`kwcoco.kw18._ensure_kw18_column_order(df)`

Ensure expected kw18 columns exist and are in the correct order.

Example

```
>>> import pandas as pd  
>>> df = pd.DataFrame(columns=KW18.DEFAULT_COLUMNS[0:18])  
>>> _ensure_kw18_column_order(df)  
>>> df = pd.DataFrame(columns=KW18.DEFAULT_COLUMNS[0:19])  
>>> _ensure_kw18_column_order(df)  
>>> df = pd.DataFrame(columns=KW18.DEFAULT_COLUMNS[0:18] + KW18.DEFAULT_  
- COLUMNS[20:21])  
>>> assert np.all(_ensure_kw18_column_order(df).columns == df.columns)
```

2.1.2.16 `kwcoco.sensorchan_spec` module

This functionality has been moved to “delayed_image”

2.1.3 Module contents

The Kitware COCO module defines a variant of the Microsoft COCO format, originally developed for the “collected images in context” object detection challenge. We are backwards compatible with the original module, but we also have improved implementations in several places, including segmentations, keypoints, annotation tracks, multi-spectral images, and videos (which represents a generic sequence of images).

A kwcoco file is a “manifest” that serves as a single reference that points to all images, categories, and annotations in a computer vision dataset. Thus, when applying an algorithm to a dataset, it is sufficient to have the algorithm take one dataset parameter: the path to the kwcoco file. Generally a kwcoco file will live in a “bundle” directory along with the data that it references, and paths in the kwcoco file will be relative to the location of the kwcoco file itself.

The main data structure in this model is largely based on the implementation in <https://github.com/cocodataset/cocoapi>. It uses the same efficient core indexing data structures, but in our implementation the indexing can be optionally turned off, functions are silent by default (with the exception of long running processes, which optionally show progress by default). We support helper functions that add and remove images, categories, and annotations.

The `kwcoco.CocoDataset` class is capable of dynamic addition and removal of categories, images, and annotations. Has better support for keypoints and segmentation formats than the original COCO format. Despite being written in Python, this data structure is reasonably efficient.

```
>>> import kwcoco  
>>> import json  
>>> # Create demo data  
>>> demo = kwcoco.CocoDataset.demo()  
>>> # Reroot can switch between absolute / relative-paths  
>>> demo.reroot(absolute=True)
```

(continues on next page)

(continued from previous page)

```

>>> # could also use demo.dump / demo.dumps, but this is more explicit
>>> text = json.dumps(demo.dataset)
>>> with open('demo.json', 'w') as file:
>>>     file.write(text)

>>> # Read from disk
>>> self = kwcoco.CocoDataset('demo.json')

>>> # Add data
>>> cid = self.add_category('Cat')
>>> gid = self.add_image('new-img.jpg')
>>> aid = self.add_annotation(image_id=gid, category_id=cid, bbox=[0, 0, 100, 100])

>>> # Remove data
>>> self.remove_annotations([aid])
>>> self.remove_images([gid])
>>> self.remove_categories([cid])

>>> # Look at data
>>> import ubelt as ub
>>> print(ub.urepr(self.basic_stats(), nl=1))
>>> print(ub.urepr(self.extended_stats(), nl=2))
>>> print(ub.urepr(self.boxsize_stats(), nl=3))
>>> print(ub.urepr(self.category_annotation_frequency()))

>>> # Inspect data
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> import kwplot
>>> kwplot.autompl()
>>> self.show_image(gid=1)

>>> # Access single-item data via imgs, cats, anns
>>> cid = 1
>>> self.cats[cid]
{'id': 1, 'name': 'astronaut', 'supercategory': 'human'}

>>> gid = 1
>>> self.imgs[gid]
{'id': 1, 'file_name': '...astro.png', 'url': 'https://i.imgur.com/KXhKM72.png'}

>>> aid = 3
>>> self.anns[aid]
{'id': 3, 'image_id': 1, 'category_id': 3, 'line': [326, 369, 500, 500]}

>>> # Access multi-item data via the annots and images helper objects
>>> aids = self.index.gid_to_aids[2]
>>> annots = self.annots(aids)

>>> print('annots = {}'.format(ub.urepr(annots, nl=1, sv=1)))
annots = <Annots(num=2)>

```

(continues on next page)

(continued from previous page)

```
>>> annots.lookup('category_id')
[6, 4]

>>> annots.lookup('bbox')
[[37, 6, 230, 240], [124, 96, 45, 18]]

>>> # built in conversions to efficient kwimage array DataStructures
>>> print(ub.urepr(annots.detections.data, sv=1))
{
    'boxes': <Boxes(xywh,
                      array([[ 37.,   6., 230., 240.],
                             [124.,  96.,  45., 18.]], dtype=float32)>,
    'class_idxs': [5, 3],
    'keypoints': <PointsList(n=2)>,
    'segmentations': <PolygonList(n=2)>,
}

>>> gids = list(self.imgs.keys())
>>> images = self.images(gids)
>>> print('images = {}'.format(ub.urepr(images, nl=1, sv=1)))
images = <Images(num=3)>

>>> images.lookup('file_name')
['...astro.png', '...carl.png', '...stars.png']

>>> print('images.annots = {}'.format(images.annots))
images.annots = <AnnotGroups(n=3, m=3.7, s=3.9)>

>>> print('images.annots.cids = {}'.format(images.annots.cids))
images.annots.cids = [[1, 2, 3, 4, 5, 5, 5, 5, 5], [6, 4], []]
```

2.1.3.1 CocoDataset API

The following is a logical grouping of the public kwcoco.CocoDataset API attributes and methods. See the in-code documentation for further details.

2.1.3.1.1 CocoDataset classmethods (via MixinCocoExtras)

- `kwcoco.CocoDataset.coerce` - Attempt to transform the input into the intended CocoDataset.
- `kwcoco.CocoDataset.demo` - Create a toy coco dataset for testing and demo purposes
- `kwcoco.CocoDataset.random` - Creates a random CocoDataset according to distribution parameters

2.1.3.1.2 CocoDataset classmethods (via CocoDataset)

- `kwcoco.CocoDataset.from_coco_paths` - Constructor from multiple coco file paths.
- `kwcoco.CocoDataset.from_data` - Constructor from a json dictionary
- `kwcoco.CocoDataset.from_image_paths` - Constructor from a list of images paths.

2.1.3.1.3 CocoDataset slots

- `kwcoco.CocoDataset.index` - an efficient lookup index into the coco data structure. The index defines its own attributes like `anns`, `cats`, `imgs`, `gid_to_aids`, `file_name_to_img`, etc. See `CocoIndex` for more details on which attributes are available.
- `kwcoco.CocoDataset.hashid` - If computed, this will be a hash uniquely identifying the dataset. To ensure this is computed see `kwcoco.coco_dataset.MixinCocoExtras._build_hashid()`.
- `kwcoco.CocoDataset.hashid_parts` -
- `kwcoco.CocoDataset.tag` - A tag indicating the name of the dataset.
- `kwcoco.CocoDataset.dataset` - raw json data structure. This is the base dictionary that contains {‘annotations’: List, ‘images’: List, ‘categories’: List}
- `kwcoco.CocoDataset.bundle_dpath` - If known, this is the root path that all image file names are relative to. This can also be manually overwritten by the user.
- `kwcoco.CocoDataset.assets_dpath` -
- `kwcoco.CocoDataset.cache_dpath` -

2.1.3.1.4 CocoDataset properties

- `kwcoco.CocoDataset.anns` -
- `kwcoco.CocoDataset.cats` -
- `kwcoco.CocoDataset.cid_to_aids` -
- `kwcoco.CocoDataset.data_fpath` -
- `kwcoco.CocoDataset.data_root` -
- `kwcoco.CocoDataset.fpath` - if known, this stores the filepath the dataset was loaded from
- `kwcoco.CocoDataset.gid_to_aids` -
- `kwcoco.CocoDataset.img_root` -
- `kwcoco.CocoDataset.imgs` -
- `kwcoco.CocoDataset.n_annot` -
- `kwcoco.CocoDataset.n_cats` -
- `kwcoco.CocoDataset.n_images` -
- `kwcoco.CocoDataset.n_videos` -
- `kwcoco.CocoDataset.name_to_cat` -

2.1.3.1.5 CocoDataset methods (via MixinCocoAddRemove)

- `kwcoco.CocoDataset.add_annotation` - Add an annotation to the dataset (dynamically updates the index)
- `kwcoco.CocoDataset.add_annotations` - Faster less-safe multi-item alternative to add_annotation.
- `kwcoco.CocoDataset.add_category` - Adds a category
- `kwcoco.CocoDataset.add_image` - Add an image to the dataset (dynamically updates the index)
- `kwcoco.CocoDataset.add_images` - Faster less-safe multi-item alternative
- `kwcoco.CocoDataset.add_video` - Add a video to the dataset (dynamically updates the index)
- `kwcoco.CocoDataset.clear_annotations` - Removes all annotations (but not images and categories)
- `kwcoco.CocoDataset.clear_images` - Removes all images and annotations (but not categories)
- `kwcoco.CocoDataset.ensure_category` - Like add_category(), but returns the existing category id if it already exists instead of failing. In this case all metadata is ignored.
- `kwcoco.CocoDataset.ensure_image` - Like add_image(), but returns the existing image id if it already exists instead of failing. In this case all metadata is ignored.
- `kwcoco.CocoDataset.remove_annotation` - Remove a single annotation from the dataset
- `kwcoco.CocoDataset.remove_annotation_keypoints` - Removes all keypoints with a particular category
- `kwcoco.CocoDataset.remove_annotations` - Remove multiple annotations from the dataset.
- `kwcoco.CocoDataset.remove_categories` - Remove categories and all annotations in those categories. Currently does not change any hierarchy information
- `kwcoco.CocoDataset.remove_images` - Remove images and any annotations contained by them
- `kwcoco.CocoDataset.remove_keypoint_categories` - Removes all keypoints of a particular category as well as all annotation keypoints with those ids.
- `kwcoco.CocoDataset.remove_videos` - Remove videos and any images / annotations contained by them
- `kwcoco.CocoDataset.set_annotation_category` - Sets the category of a single annotation

2.1.3.1.6 CocoDataset methods (via MixinCocoObjects)

- `kwcoco.CocoDataset.annots` - Return vectorized annotation objects
- `kwcoco.CocoDataset.categories` - Return vectorized category objects
- `kwcoco.CocoDataset.images` - Return vectorized image objects
- `kwcoco.CocoDataset.videos` - Return vectorized video objects

2.1.3.1.7 CocoDataset methods (via MixinCocoStats)

- `kwcoco.CocoDataset.basic_stats` - Reports number of images, annotations, and categories.
- `kwcoco.CocoDataset.boxsize_stats` - Compute statistics about bounding box sizes.
- `kwcoco.CocoDataset.category_annotation_frequency` - Reports the number of annotations of each category
- `kwcoco.CocoDataset.category_annotation_type_frequency` - Reports the number of annotations of each type for each category
- `kwcoco.CocoDataset.conform` - Make the COCO file conform a stricter spec, infers attributes where possible.
- `kwcoco.CocoDataset.extended_stats` - Reports number of images, annotations, and categories.
- `kwcoco.CocoDataset.find_representative_images` - Find images that have a wide array of categories. Attempt to find the fewest images that cover all categories using images that contain both a large and small number of annotations.
- `kwcoco.CocoDataset.keypoint_annotation_frequency` -
- `kwcoco.CocoDataset.stats` - This function corresponds to `kwcoco.cli.coco_stats`.
- `kwcoco.CocoDataset.validate` - Performs checks on this coco dataset.

2.1.3.1.8 CocoDataset methods (via MixinCocoAccessors)

- `kwcoco.CocoDataset.category_graph` - Construct a networkx category hierarchy
- `kwcoco.CocoDataset.delayed_load` - Experimental method
- `kwcoco.CocoDataset.get_auxiliary_fpath` - Returns the full path to auxiliary data for an image
- `kwcoco.CocoDataset.get_image_fpath` - Returns the full path to the image
- `kwcoco.CocoDataset.keypoint_categories` - Construct a consistent CategoryTree representation of key-point classes
- `kwcoco.CocoDataset.load_annot_sample` - Reads the chip of an annotation. Note this is much less efficient than using a sampler, but it doesn't require disk cache.
- `kwcoco.CocoDataset.load_image` - Reads an image from disk and
- `kwcoco.CocoDataset.object_categories` - Construct a consistent CategoryTree representation of object classes

2.1.3.1.9 CocoDataset methods (via CocoDataset)

- `kwcoco.CocoDataset.copy` - Deep copies this object
- `kwcoco.CocoDataset.dump` - Writes the dataset out to the json format
- `kwcoco.CocoDataset.dumps` - Writes the dataset out to the json format
- `kwcoco.CocoDataset.subset` - Return a subset of the larger coco dataset by specifying which images to port. All annotations in those images will be taken.
- `kwcoco.CocoDataset.union` - Merges multiple `CocoDataset` items into one. Names and associations are retained, but ids may be different.

- `kwcoco.CocoDataset.view_sql` - Create a cached SQL interface to this dataset suitable for large scale multiprocessing use cases.

2.1.3.1.10 CocoDataset methods (via MixinCocoExtras)

- `kwcoco.CocoDataset.corrupted_images` - Check for images that don't exist or can't be opened
- `kwcoco.CocoDataset.missing_images` - Check for images that don't exist
- `kwcoco.CocoDataset.rename_categories` - Rename categories with a potentially coarser categorization.
- `kwcoco.CocoDataset.reroot` - Rebase image/data paths onto a new image/data root.

2.1.3.1.11 CocoDataset methods (via MixinCocoDraw)

- `kwcoco.CocoDataset.draw_image` - Use kwimage to draw all annotations on an image and return the pixels as a numpy array.
- `kwcoco.CocoDataset.imread` - Loads a particular image
- `kwcoco.CocoDataset.show_image` - Use matplotlib to show an image with annotations overlaid

`class kwcoco.AbstractCocoDataset`

Bases: `ABC`

This is a common base for all variants of the Coco Dataset

At the time of writing there is `kwcoco.CocoDataset` (which is the dictionary-based backend), and the `kwcoco.coco_sql_dataset.CocoSqlDataset`, which is experimental.

`_abc_impl = <_abc._abc_data object>`

`class kwcoco.CategoryTree(graph=None, checks=True)`

Bases: `NiceRepr`

Wrapper that maintains flat or hierarchical category information.

Helps compute softmaxes and probabilities for tree-based categories where a directed edge (A, B) represents that A is a superclass of B.

Note: There are three basic properties that this object maintains:

`node:`

Alphanumeric string names that should be generally descriptive. Using spaces `and` special characters `in` these names `is` discouraged, but can be done. This `is` the COCO category `"name"` attribute. For categories this may be denoted `as` (`name`, `node`, `cname`, `catname`).

`id:`

The integer `id` of a category should ideally remain consistent. These are often given by a dataset (e.g. a COCO dataset). This `is` the COCO category `"id"` attribute. For categories this `is` often denoted `as` (`id`, `cid`).

`index:`

(continues on next page)

(continued from previous page)

Contiguous zero-based indices that indexes the `list` of categories. These should be used `for` the fastest access `in` backend computation tasks. Typically corresponds to the ordering of the channels `in` the final linear layer `in` an associated model. For categories this `is` often denoted `as` (`index, cidx, idx, or cx`).

Variables

- `idx_to_node` (`List[str]`) – a list of class names. Implicitly maps from index to category name.
- `id_to_node` (`Dict[int, str]`) – maps integer ids to category names
- `node_to_id` (`Dict[str, int]`) – maps category names to ids
- `node_to_idx` (`Dict[str, int]`) – maps category names to indexes
- `graph` (`networkx.Graph`) – a Graph that stores any hierarchy information. For standard mutually exclusive classes, this graph is edgeless. Nodes in this graph can maintain category attributes / properties.
- `idx_groups` (`List[List[int]]`) – groups of category indices that share the same parent category.

Example

```
>>> from kwCOCO.category_tree import *
>>> graph = nx.from_dict_of_lists({
>>>     'background': [],
>>>     'foreground': ['animal'],
>>>     'animal': ['mammal', 'fish', 'insect', 'reptile'],
>>>     'mammal': ['dog', 'cat', 'human', 'zebra'],
>>>     'zebra': ['grevys', 'plains'],
>>>     'grevys': ['fred'],
>>>     'dog': ['boxer', 'beagle', 'golden'],
>>>     'cat': ['maine coon', 'persian', 'sphynx'],
>>>     'reptile': ['bearded dragon', 't-rex'],
>>> }, nx.DiGraph)
>>> self = CategoryTree(graph)
>>> print(self)
<CategoryTree(nNodes=22, maxDepth=6, maxBreadth=4...)>
```

Example

```
>>> # The coerce classmethod is the easiest way to create an instance
>>> import kwcoc
>>> kwcoc.CategoryTree.coerce(['a', 'b', 'c'])
<CategoryTree...nNodes=3, nodes='a', 'b', 'c'...
>>> kwcoc.CategoryTree.coerce(4)
<CategoryTree...nNodes=4, nodes='class_1', 'class_2', 'class_3', ...
>>> kwcoc.CategoryTree.coerce(4)
```

Parameters

- **graph** (*nx.DiGraph*) – either the graph representing a category hierarchy
- **checks** (*bool, default=True*) – if false, bypass input checks

copy()

classmethod from_mutex(*nodes, bg_hack=True*)

Parameters

nodes (*List[str]*) – or a list of class names (in which case they will all be assumed to be mutually exclusive)

Example

```
>>> print(CategoryTree.from_mutex(['a', 'b', 'c']))
<CategoryTree(nNodes=3, ...)>
```

classmethod from_json

Parameters

state (*Dict*) – see `__getstate__` / `__json__` for details

classmethod from_coco

Create a CategoryTree object from coco categories

Parameters

List[Dict] – list of coco-style categories

classmethod coerce

Attempt to coerce data as a CategoryTree object.

This is primarily useful for when the software stack depends on categories being represented

This will work if the input data is a specially formatted json dict, a list of mutually exclusive classes, or if it is already a CategoryTree. Otherwise an error will be thrown.

Parameters

- **data** (*object*) – a known representation of a category tree.
- ****kwargs** – input type specific arguments

Returns

`self`

Return type

`CategoryTree`

Raises

- **TypeError** - if the input format is unknown –
- **ValueError** - if kwargs are not compatible with the input format –

Example

```
>>> import kwcoco
>>> classes1 = kwcoco.CategoryTree.coerce(3) # integer
>>> classes2 = kwcoco.CategoryTree.coerce(classes1.__json__()) # graph dict
>>> classes3 = kwcoco.CategoryTree.coerce(['class_1', 'class_2', 'class_3']) # 
->mutex list
>>> classes4 = kwcoco.CategoryTree.coerce(classes1.graph) # nx Graph
>>> classes5 = kwcoco.CategoryTree.coerce(classes1) # cls
>>> # xdoctest: +REQUIRES(module:nd sampler)
>>> import nd sampler
>>> classes6 = nd sampler.CategoryTree.coerce(3)
>>> classes7 = nd sampler.CategoryTree.coerce(classes1)
>>> classes8 = kwcoco.CategoryTree.coerce(classes6)
```

classmethod demo(key='coco', **kwargs)

Parameters

key (str) – specify which demo dataset to use. Can be ‘coco’ (which uses the default coco demo data). Can be ‘btree’ which creates a binary tree and accepts kwargs ‘r’ and ‘h’ for branching-factor and height. Can be ‘btree2’, which is the same as btree but returns strings

CommandLine

```
xdoctest -m ~/code/kwcoco/kwcoco/category_tree.py CategoryTree.demo
```

Example

```
>>> from kwcoco.category_tree import *
>>> self = CategoryTree.demo()
>>> print('self = {}'.format(self))
self = <CategoryTree(nNodes=10, maxDepth=2, maxBreadth=4...)>
```

to_coco()

Converts to a coco-style data structure

Yields

Dict – coco category dictionaries

property id_to_idx

Example:

```
>>> import kwcoco
>>> self = kwcoco.CategoryTree.demo()
>>> self.id_to_idx[1]
```

property idx_to_id

Example:

```
>>> import kwcoco
>>> self = kwcoco.CategoryTree.demo()
>>> self.idx_to_id[0]
```

idx_to_ancestor_idxs(*include_self=True*)

Mapping from a class index to its ancestors

Parameters

include_self (*bool, default=True*) – if True includes each node as its own ancestor.

idx_to_descendants_idxs(*include_self=False*)

Mapping from a class index to its descendants (including itself)

Parameters

include_self (*bool, default=False*) – if True includes each node as its own descendant.

idx_pairwise_distance()

Get a matrix encoding the distance from one class to another.

Distances

- from parents to children are positive (descendants),
- from children to parents are negative (ancestors),
- between unreachable nodes (wrt to forward and reverse graph) are nan.

is_mutex()

Returns True if all categories are mutually exclusive (i.e. flat)

If true, then the classes may be represented as a simple list of class names without any loss of information, otherwise the underlying category graph is necessary to preserve all knowledge.

Todo:

- [] what happens when we have a dummy root?
-

property num_classes**property class_names****property category_names****property cats**

Returns a mapping from category names to category attributes.

If this category tree was constructed from a coco-dataset, then this will contain the coco category attributes.

Returns

Dict[str, Dict[str, object]]

Example

```
>>> from kwcoco.category_tree import *
>>> self = CategoryTree.demo()
>>> print('self.cats = {!r}'.format(self.cats))
```

index(node)

Return the index that corresponds to the category name

_build_index()

construct lookup tables

show()**forest_str()****normalize()**

Applies a normalization scheme to the categories.

Note: this may break other tasks that depend on exact category names.

Returns

CategoryTree

Example

```
>>> from kwcoco.category_tree import * # NOQA
>>> import kwcoco
>>> orig = kwcoco.CategoryTree.demo('animals_v1')
>>> self = kwcoco.CategoryTree(nx.relabel_nodes(orig.graph, str.upper))
>>> norm = self.normalize()
```

class kwcoco.ChannelSpec(spec, parsed=None)

Bases: BaseChannelSpec

Parse and extract information about network input channel specs for early or late fusion networks.

Behaves like a dictionary of FusedChannelSpec objects

Todo:

- [] Rename to something that indicates this is a collection of FusedChannelSpec? MultiChannelSpec?

Note: This class name and API is in flux and subject to change.

Note: The pipe ('|') character represents an early-fused input stream, and order matters (it is non-commutative).

The comma (',') character separates different inputs streams/branches for a multi-stream/branch network which will be later fused. Order does not matter

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> # Integer spec
>>> ChannelSpec.coerce(3)
<ChannelSpec(u0|u1|u2) ...>
```

```
>>> # single mode spec
>>> ChannelSpec.coerce('rgb')
<ChannelSpec(rgb) ...>
```

```
>>> # early fused input spec
>>> ChannelSpec.coerce('rgb|disparity')
<ChannelSpec(rgb|disparity) ...>
```

```
>>> # late fused input spec
>>> ChannelSpec.coerce('rgb,disparity')
<ChannelSpec(rgb,disparity) ...>
```

```
>>> # early and late fused input spec
>>> ChannelSpec.coerce('rgb|ir,disparity')
<ChannelSpec(rgb|ir,disparity) ...>
```

Example

```
>>> self = ChannelSpec('gray')
>>> print('self.info = {}'.format(ub.urepr(self.info, nl=1)))
>>> self = ChannelSpec('rgb')
>>> print('self.info = {}'.format(ub.urepr(self.info, nl=1)))
>>> self = ChannelSpec('rgb|disparity')
>>> print('self.info = {}'.format(ub.urepr(self.info, nl=1)))
>>> self = ChannelSpec('rgb|disparity,disparity')
>>> print('self.info = {}'.format(ub.urepr(self.info, nl=1)))
>>> self = ChannelSpec('rgb,disparity,flowx|flowy')
>>> print('self.info = {}'.format(ub.urepr(self.info, nl=1)))
```

Example

```
>>> specs = [
>>>     'rgb',                  # and rgb input
>>>     'rgb|disparity',        # rgb early fused with disparity
>>>     'rgb,disparity',        # rgb early late with disparity
>>>     'rgb|ir,disparity',    # rgb early fused with ir and late fused with disparity
>>>     3,                      # 3 unknown channels
>>> ]
>>> for spec in specs:
>>>     print('=====')
>>>     print('spec = {!r}'.format(spec))
>>>     #
```

(continues on next page)

(continued from previous page)

```
>>> self = ChannelSpec.coerce(spec)
>>> print('self = {!r}'.format(self))
>>> sizes = self.sizes()
>>> print('sizes = {!r}'.format(sizes))
>>> print('self.info = {}'.format(ub.urepr(self.info, nl=1)))
>>> #
>>> item = self._demo_item((1, 1), rng=0)
>>> inputs = self.encode(item)
>>> components = self.decode(inputs)
>>> input_shapes = ub.map_vals(lambda x: x.shape, inputs)
>>> component_shapes = ub.map_vals(lambda x: x.shape, components)
>>> print('item = {}'.format(ub.urepr(item, precision=1)))
>>> print('inputs = {}'.format(ub.urepr(inputs, precision=1)))
>>> print('input_shapes = {}'.format(ub.urepr(input_shapes)))
>>> print('components = {}'.format(ub.urepr(components, precision=1)))
>>> print('component_shapes = {}'.format(ub.urepr(component_shapes, nl=1)))
```

property spec**property info****classmethod coerce(data)**

Attempt to interpret the data as a channel specification

Returns

ChannelSpec

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> data = FusedChannelSpec.coerce(3)
>>> assert ChannelSpec.coerce(data).spec == 'u0|u1|u2'
>>> data = ChannelSpec.coerce(3)
>>> assert data.spec == 'u0|u1|u2'
>>> assert ChannelSpec.coerce(data).spec == 'u0|u1|u2'
>>> data = ChannelSpec.coerce('u:3')
>>> assert data.normalize().spec == 'u.0|u.1|u.2'
```

parse()

Build internal representation

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> self = ChannelSpec('b1|b2|b3|rgb,B:3')
>>> print(self.parse())
>>> print(self.normalize().parse())
>>> ChannelSpec('').parse()
```

Example

```
>>> base = ChannelSpec('rgb|disparity,flowx|r|flowy')
>>> other = ChannelSpec('rgb')
>>> self = base.intersection(other)
>>> assert self.numel() == 4
```

concise()**Example**

```
>>> self = ChannelSpec('b1|b2,b3|rgb|B.0,B.1|B.2')
>>> print(self.concise().spec)
b1|b2,b3|r|g|b|B.0,B.1:3
```

normalize()

Replace aliases with explicit single-band-per-code specs

Returns

normalized spec

Return type

ChannelSpec

Example

```
>>> self = ChannelSpec('b1|b2,b3|rgb,B:3')
>>> normed = self.normalize()
>>> print('self = {}'.format(self))
>>> print('normed = {}'.format(normed))
self = <ChannelSpec(b1|b2,b3|rgb,B:3)>
normed = <ChannelSpec(b1|b2,b3|r|g|b,B.0|B.1|B.2)>
```

keys()**values()****items()****fuse()**

Fuse all parts into an early fused channel spec

Returns

FusedChannelSpec

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> self = ChannelSpec.coerce('b1|b2,b3|rgb,B:3')
>>> fused = self.fuse()
>>> print('self = {}'.format(self))
>>> print('fused = {}'.format(fused))
self = <ChannelSpec(b1|b2,b3|rgb,B:3)>
fused = <FusedChannelSpec(b1|b2|b3|rgb|B:3)>
```

streams()

Breaks this spec up into one spec for each early-fused input stream

Example

```
self = ChannelSpec.coerce('r|g,B1|B2,fx|fy') list(map(len, self.streams()))
```

code_list()**as_path()**

Returns a string suitable for use in a path.

Note, this may no longer be a valid channel spec

Example

```
>>> from delayed_image.channel_spec import *
>>> self = ChannelSpec('rgb|disparity,flowx|r|flowy')
>>> self.as_path()
rgb_disparity,flowx_r_flowy
```

difference(*other*)

Set difference. Remove all instances of other channels from this set of channels.

Example

```
>>> from delayed_image.channel_spec import *
>>> self = ChannelSpec('rgb|disparity,flowx|r|flowy')
>>> other = ChannelSpec('rgb')
>>> print(self.difference(other))
>>> other = ChannelSpec('flowx')
>>> print(self.difference(other))
<ChannelSpec(disparity,flowx|flowy)>
<ChannelSpec(r|g|b|disparity,r|flowy)>
```

Example

```
>>> from delayed_image.channel_spec import *
>>> self = ChannelSpec('a|b,c|d')
>>> new = self - {'a', 'b'}
>>> len(new.sizes()) == 1
>>> empty = new - 'c|d'
>>> assert empty.numel() == 0
```

intersection(*other*)

Set difference. Remove all instances of other channels from this set of channels.

Example

```
>>> from delayed_image.channel_spec import *
>>> self = ChannelSpec('rgb|disparity,flowx|r|flowy')
>>> other = ChannelSpec('rgb')
>>> new = self.intersection(other)
>>> print(new)
>>> print(new.numel())
>>> other = ChannelSpec('flowx')
>>> new = self.intersection(other)
>>> print(new)
>>> print(new.numel())
<ChannelSpec(r|g|b,r)>
4
<ChannelSpec(flowx)>
1
```

union(*other*)

Union simply tags on a second channel spec onto this one. Duplicates are maintained.

Example

```
>>> from delayed_image.channel_spec import *
>>> self = ChannelSpec('rgb|disparity,flowx|r|flowy')
>>> other = ChannelSpec('rgb')
>>> new = self.union(other)
>>> print(new)
>>> print(new.numel())
>>> other = ChannelSpec('flowx')
>>> new = self.union(other)
>>> print(new)
>>> print(new.numel())
<ChannelSpec(r|g|b|disparity,flowx|r|flowy,r|g|b)>
10
<ChannelSpec(r|g|b|disparity,flowx|r|flowy,flowx)>
8
```

issubset(*other*)

issuperset(*other*)

numel()

Total number of channels in this spec

sizes()

Number of dimensions for each fused stream channel

IE: The EARLY-FUSED channel sizes

Example

```
>>> self = ChannelSpec('rgb|disparity,flowx|flowy,B:10')
>>> self.normalize().concise()
>>> self.sizes()
```

unique(*normalize=False*)

Returns the unique channels that will need to be given or loaded

_item_shapes(*dims*)

Expected shape for an input item

Parameters

dims (*Tuple[int, int]*) – the spatial dimension

Returns

Dict[int, tuple]

_demo_item(*dims=(4, 4)*, *rng=None*)

Create an input that satisfies this spec

Returns

an item like it might appear when its returned from the
***__getitem__* method of a *torch...Dataset*.**

Return type

dict

Example

```
>>> dims = (1, 1)
>>> ChannelSpec.coerce(3)._demo_item(dims, rng=0)
>>> ChannelSpec.coerce('r|g|b|disparity')._demo_item(dims, rng=0)
>>> ChannelSpec.coerce('rgb|disparity')._demo_item(dims, rng=0)
>>> ChannelSpec.coerce('rgb,disparity')._demo_item(dims, rng=0)
>>> ChannelSpec.coerce('rgb')._demo_item(dims, rng=0)
>>> ChannelSpec.coerce('gray')._demo_item(dims, rng=0)
```

encode(*item, axis=0, mode=1*)

Given a dictionary containing preloaded components of the network inputs, build a concatenated (fused) network representations of each input stream.

Parameters

- **item** (*Dict[str, Tensor]*) – a batch item containing unfused parts. each key should be a single-stream (optionally early fused) channel key.

- **axis** (*int, default=0*) – concatenation dimension

Returns

mapping between input stream and its early fused tensor input.

Return type

Dict[str, Tensor]

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> import numpy as np
>>> dims = (4, 4)
>>> item = {
>>>     'rgb': np.random.rand(3, *dims),
>>>     'disparity': np.random.rand(1, *dims),
>>>     'flowx': np.random.rand(1, *dims),
>>>     'flowy': np.random.rand(1, *dims),
>>> }
>>> # Complex Case
>>> self = ChannelSpec('rgb|disparity',rgb|disparity|flowx|flowy,flowx|flowy')
>>> fused = self.encode(item)
>>> input_shapes = ub.map_vals(lambda x: x.shape, fused)
>>> print('input_shapes = {}'.format(ub.urepr(input_shapes, nl=1)))
>>> # Simpler case
>>> self = ChannelSpec('rgb|disparity')
>>> fused = self.encode(item)
>>> input_shapes = ub.map_vals(lambda x: x.shape, fused)
>>> print('input_shapes = {}'.format(ub.urepr(input_shapes, nl=1)))
```

Example

```
>>> # Case where we have to break up early fused data
>>> import numpy as np
>>> dims = (40, 40)
>>> item = {
>>>     'rgb|disparity': np.random.rand(4, *dims),
>>>     'flowx': np.random.rand(1, *dims),
>>>     'flowy': np.random.rand(1, *dims),
>>> }
>>> # Complex Case
>>> self = ChannelSpec('rgb,disparity,rgb|disparity,rgb|disparity|flowx|flowy,
>>> ~flowx|flowy,flowx,disparity')
>>> inputs = self.encode(item)
>>> input_shapes = ub.map_vals(lambda x: x.shape, inputs)
>>> print('input_shapes = {}'.format(ub.urepr(input_shapes, nl=1)))
```

```
>>> # xdoctest: +REQUIRES(--bench)
>>> #self = ChannelSpec('rgb|disparity,flowx|flowy')
>>> import timerit
>>> ti = timerit.Timerit(100, bestof=10, verbose=2)
```

(continues on next page)

(continued from previous page)

```
>>> for timer in ti.reset('mode=simple'):
>>>     with timer:
>>>         inputs = self.encode(item, mode=0)
>>> for timer in ti.reset('mode=minimize-concat'):
>>>     with timer:
>>>         inputs = self.encode(item, mode=1)
```

decode(inputs, axis=1)

break an early fused item into its components

Parameters

- **inputs** (*Dict[str, Tensor]*) – dictionary of components
- **axis** (*int, default=1*) – channel dimension

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> import numpy as np
>>> dims = (4, 4)
>>> item_components = {
>>>     'rgb': np.random.rand(3, *dims),
>>>     'ir': np.random.rand(1, *dims),
>>> }
>>> self = ChannelSpec('rgb|ir')
>>> item_encoded = self.encode(item_components)
>>> batch = {k: np.concatenate([v[None, :], v[None, :]]), axis=0}
>>>     for k, v in item_encoded.items()
>>> components = self.decode(batch)
```

Example

```
>>> # xdoctest: +REQUIRES(module:netharn, module:torch)
>>> import torch
>>> import numpy as np
>>> dims = (4, 4)
>>> components = {
>>>     'rgb': np.random.rand(3, *dims),
>>>     'ir': np.random.rand(1, *dims),
>>> }
>>> components = ub.map_vals(torch.from_numpy, components)
>>> self = ChannelSpec('rgb|ir')
>>> encoded = self.encode(components)
>>> from netharn.data import data_containers
>>> item = {k: data_containers.ItemContainer(v, stack=True)}
>>>     for k, v in encoded.items()
>>> batch = data_containers.container_collate([item, item])
>>> components = self.decode(batch)
```

component_indices(axis=2)

Look up component indices within fused streams

Example

```
>>> dims = (4, 4)
>>> inputs = ['flowx', 'flowy', 'disparity']
>>> self = ChannelSpec('disparity,flowx|flowy')
>>> component_indices = self.component_indices()
>>> print('component_indices = {}'.format(ub.urepr(component_indices, nl=1)))
component_indices =
    'disparity': ('disparity', (slice(None, None, None), slice(None, None, None), slice(0, 1, None))),
    'flowx': ('flowx|flowy', (slice(None, None, None), slice(None, None, None), slice(0, 1, None))),
    'flowy': ('flowx|flowy', (slice(None, None, None), slice(None, None, None), slice(1, 2, None))),
}
```

```
class kwcoco.CocoDataset(data=None, tag=None, bundle_dpath=None, img_root=None, fname=None,
                         autobuild=True)

Bases: AbstractCocoDataset, MixinCocoAddRemove, MixinCocoStats, MixinCocoObjects,
MixinCocoDraw, MixinCocoAccessors, MixinCocoExtras, MixinCocoIndex, MixinCocoDepricate,
NiceRepr
```

The main coco dataset class with a json dataset backend.

Variables

- **dataset** (*Dict*) – raw json data structure. This is the base dictionary that contains {‘annotations’: List, ‘images’: List, ‘categories’: List}
- **index** (*CocoIndex*) – an efficient lookup index into the coco data structure. The index defines its own attributes like `anns`, `cats`, `imgs`, `gid_to_aids`, `file_name_to_img`, etc. See `CocoIndex` for more details on which attributes are available.
- **fpath** (*PathLike* / *None*) – if known, this stores the filepath the dataset was loaded from
- **tag** (*str* / *None*) – A tag indicating the name of the dataset.
- **bundle_dpath** (*PathLike* / *None*) – If known, this is the root path that all image file names are relative to. This can also be manually overwritten by the user.
- **hashid** (*str* / *None*) – If computed, this will be a hash uniquely identifying the dataset. To ensure this is computed see `kwcoco.coco_dataset.MixinCocoExtras._build_hashid()`.

References

<http://cocodataset.org/#format> <http://cocodataset.org/#download>

CommandLine

```
python -m kwCOCO.coco_dataset CocoDataset --show
```


Example

```
>>> from kwCOCO.coco_dataset import demo_coco_data
>>> import kwCOCO
>>> import ubelt as ub
>>> # Returns a coco json structure
>>> dataset = demo_coco_data()
>>> # Pass the coco json structure to the API
>>> self = kwCOCO.CocoDataset(dataset, tag='demo')
>>> # Now you can access the data using the index and helper methods
>>> #
>>> # Start by looking up an image by its COCO id.
>>> image_id = 1
>>> img = self.index.imgs[image_id]
>>> print(ub.urepr(img, nl=1, sort=1))
{
    'file_name': 'astro.png',
    'id': 1,
    'url': 'https://i.imgur.com/KXhKM72.png',
}
>>> #
>>> # Use the (gid_to_aids) index to lookup annotations in the image
>>> annotation_id = sorted(self.index.gid_to_aids[image_id])[0]
>>> ann = self.index.anns[annotation_id]
>>> print(ub.urepr((ub.udict(ann) - {'segmentation'}).sorted_keys(), nl=1))
{
    'bbox': [10, 10, 360, 490],
    'category_id': 1,
    'id': 1,
    'image_id': 1,
    'keypoints': [247, 101, 2, 202, 100, 2],
}
>>> #
>>> # Use annotation category id to look up that information
>>> category_id = ann['category_id']
>>> cat = self.index.cats[category_id]
>>> print('cat = {}'.format(ub.urepr(cat, nl=1, sort=1)))
cat = {
    'id': 1,
    'name': 'astronaut',
    'supercategory': 'human',
}
>>> #
>>> # Now play with some helper functions, like extended statistics
>>> extended_stats = self.extended_stats()
>>> # xdoctest: +IGNORE_WANT
>>> print('extended_stats = {}'.format(ub.urepr(extended_stats, nl=1, precision=2, u
```

(continues on next page)

(continued from previous page)

```
↳sort=1)))
extended_stats = {
    'annots_per_img': {'mean': 3.67, 'std': 3.86, 'min': 0.00, 'max': 9.00, 'nMin': 1,
    ↳1, 'nMax': 1, 'shape': (3,)},
    'imgs_per_cat': {'mean': 0.88, 'std': 0.60, 'min': 0.00, 'max': 2.00, 'nMin': 2,
    ↳ 'nMax': 1, 'shape': (8,)},
    'cats_per_img': {'mean': 2.33, 'std': 2.05, 'min': 0.00, 'max': 5.00, 'nMin': 1,
    ↳ 'nMax': 1, 'shape': (3,)},
    'annots_per_cat': {'mean': 1.38, 'std': 1.49, 'min': 0.00, 'max': 5.00, 'nMin': 2,
    ↳2, 'nMax': 1, 'shape': (8,)},
    'imgs_per_video': {'empty_list': True},
}
>>> # You can "draw" a raster of the annotated image with cv2
>>> canvas = self.draw_image(2)
>>> # Or if you have matplotlib you can "show" the image with mpl objects
>>> # xdoctest: +REQUIRES(--show)
>>> from matplotlib import pyplot as plt
>>> fig = plt.figure()
>>> ax1 = fig.add_subplot(1, 2, 1)
>>> self.show_image(gid=2)
>>> ax2 = fig.add_subplot(1, 2, 2)
>>> ax2.imshow(canvas)
>>> ax1.set_title('show with matplotlib')
>>> ax2.set_title('draw with cv2')
>>> plt.show()
```

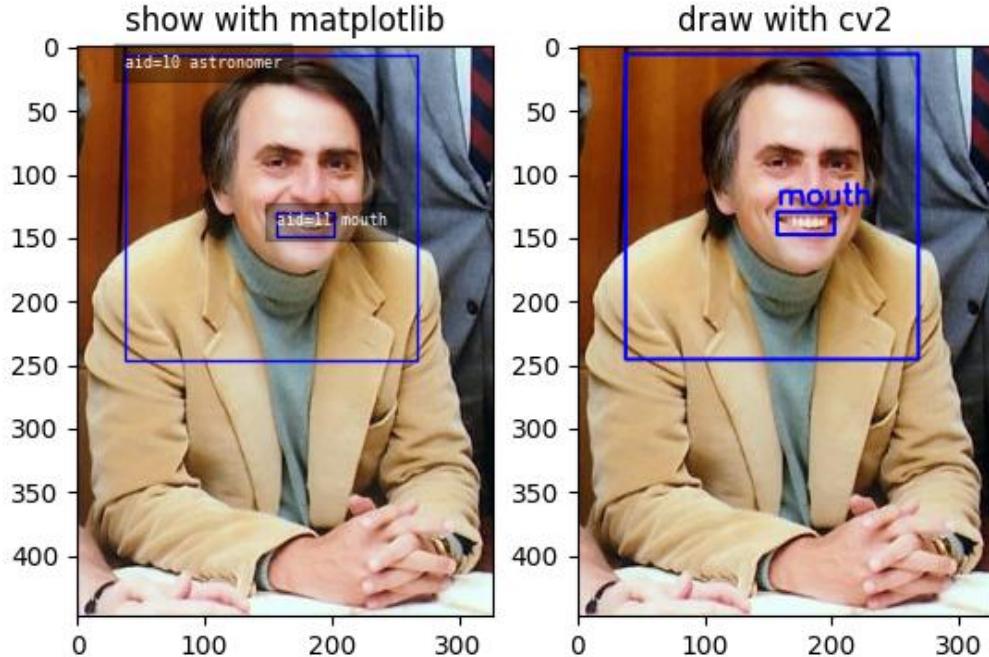

Parameters

- **data** (*str* | *PathLike* | *dict* | *None*) – Either a filepath to a coco json file, or a dictionary containing the actual coco json structure. For a more generally coercable constructor see func:*CocoDataset.coerce*.
- **tag** (*str* | *None*) – Name of the dataset for display purposes, and does not influence behavior of the underlying data structure, although it may be used via convinience methods. We attempt to autopopulate this via information in *data* if available. If unspecified and *data* is a filepath this becomes the basename.
- **bundle_dpath** (*str* | *None*) – the root of the dataset that images / external data will be assumed to be relative to. If unspecified, we attempt to determine it using information in *data*. If *data* is a filepath, we use the dirname of that path. If *data* is a dictionary, we look for the “img_root” key. If unspecified and we fail to introspect then, we fallback to the current working directory.
- **img_root** (*str* | *None*) – deprecated alias for *bundle_dpath*

property fpath

In the future we will deprecate *img_root* for *bundle_dpath*

_update_fpath(*new_fpath*)

_infer_dirs()

classmethod from_data(*data*, *bundle_dpath=None*, *img_root=None*)

Constructor from a json dictionary

```
classmethod from_image_paths(gpaths, bundle_dpath=None, img_root=None)
```

Constructor from a list of images paths.

This is a convinience method.

Parameters

gpaths (*List[str]*) – list of image paths

Example

```
>>> import kwcoco
>>> coco_dset = kwcoco.CocoDataset.from_image_paths(['a.png', 'b.png'])
>>> assert coco_dset.n_images == 2
```

```
classmethod coerce_multiple(datas, workers=0, mode='process', verbose=1, postprocess=None,
                           ordered=True, **kwargs)
```

Coerce multiple CocoDataset objects in parallel.

Parameters

- **datas** (*List*) – list of kwcoco coercables to load
- **workers** (*int | str*) – number of worker threads / processes. Can also accept coercable workers.
- **mode** (*str*) – thread, process, or serial. Defaults to process.
- **verbose** (*int*) – verbosity level
- **postprocess** (*Callable | None*) – A function taking one arg (the loaded dataset) to run on the loaded kwcoco dataset in background workers. This can be more efficient when postprocessing is independent per kwcoco file.
- **ordered** (*bool*) – if True yields datasets in the same order as given. Otherwise results are yielded as they become available. Defaults to True.
- ****kwargs** – arguments passed to the constructor

Yields

CocoDataset

SeeAlso:

- `load_multiple` - like this function but is a strict file-path-only loader

CommandLine

```
xdoctest -m kwcoco.coco_dataset CocoDataset.coerce_multiple
```

Example

```
>>> import kwcoco
>>> dset1 = kwcoco.CocoDataset.demo('shapes1')
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> dset3 = kwcoco.CocoDataset.demo('vidshapes8')
>>> dsets = [dset1, dset2, dset3]
>>> input_fpaths = [d.fpath for d in dsets]
>>> results = list(kwcoco.CocoDataset.coerce_multiple(input_fpaths,
... ~ordered=True))
>>> result_fpaths = [r.fpath for r in results]
>>> assert result_fpaths == input_fpaths
>>> # Test unordered
>>> results1 = list(kwcoco.CocoDataset.coerce_multiple(input_fpaths,
... ~ordered=False))
>>> result_fpaths = [r.fpath for r in results]
>>> assert set(result_fpaths) == set(input_fpaths)
>>> #
>>> # Coerce from existing datasets
>>> results2 = list(kwcoco.CocoDataset.coerce_multiple(dsets, ordered=True,
... ~workers=0))
>>> assert results2[0] is dsets[0]
```

classmethod `load_multiple`(*fpaths*, *workers*=0, *mode*='process', *verbose*=1, *postprocess*=None, *ordered*=True, ***kwargs*)

Load multiple CocoDataset objects in parallel.

Parameters

- **fpaths** (*List[str | PathLike]*) – list of paths to multiple coco files to be loaded
- **workers** (*int*) – number of worker threads / processes
- **mode** (*str*) – thread, process, or serial. Defaults to process.
- **verbose** (*int*) – verbosity level
- **postprocess** (*Callable | None*) – A function taking one arg (the loaded dataset) to run on the loaded kwcoco dataset in background workers and returns the modified dataset. This can be more efficient when postprocessing is independent per kwcoco file.
- **ordered** (*bool*) – if True yields datasets in the same order as given. Otherwise results are yielded as they become available. Defaults to True.
- ****kwargs** – arguments passed to the constructor

Yields

CocoDataset

SeeAlso:

- **coerce_multiple** - like this function but accepts general coercable inputs.

classmethod `_load_multiple`(*_loader*, *inputs*, *workers*=0, *mode*='process', *verbose*=1, *postprocess*=None, *ordered*=True, ***kwargs*)

Shared logic for multiprocessing loaders.

SeeAlso:

- coerce_multiple
- load_multiple

classmethod from_coco_paths(*fpaths*, *max_workers*=0, *verbose*=1, *mode*='thread', *union*='try')

Constructor from multiple coco file paths.

Loads multiple coco datasets and unions the result

Note: if the union operation fails, the list of individually loaded files is returned instead.

Parameters

- **fpaths** (*List[str]*) – list of paths to multiple coco files to be loaded and unioned.
- **max_workers** (*int*) – number of worker threads / processes
- **verbose** (*int*) – verbosity level
- **mode** (*str*) – thread, process, or serial
- **union** (*str | bool*) – If True, unions the result datasets after loading. If False, just returns the result list. If ‘try’, then try to preform the union, but return the result list if it fails.
Default=’try’

Note: This may be deprecated. Use load_multiple or coerce_multiple and then manually perform the union.

copy()

Deep copies this object

Example

```
>>> import kwCOCO
>>> self = kwCOCO.CocoDataset.demo()
>>> new = self.copy()
>>> assert new.imgs[1] is new.dataset['images'][0]
>>> assert new.imgs[1] == self.dataset['images'][0]
>>> assert new.imgs[1] is not self.dataset['images'][0]
```

dumps(*indent=None*, *newlines=False*)

Writes the dataset out to the json format

Parameters

- **newlines** (*bool*) – if True, each annotation, image, category gets its own line
- **indent** (*int | str | None*) – indentation for the json file. See [json.dump\(\)](#) for details.
- **newlines** (*bool*) – if True, each annotation, image, category gets its own line.

Note:

Using newlines=True is similar to:

`print(ub.urepr(dset.dataset, nl=2, trailsep=False))` However, the above may not output valid json if it contains ndarrays.

Example

```
>>> import kwcoco
>>> import json
>>> self = kwcoco.CocoDataset.demo()
>>> text = self.dumps(newlines=True)
>>> print(text)
>>> self2 = kwcoco.CocoDataset(json.loads(text), tag='demo2')
>>> assert self2.dataset == self.dataset
>>> assert self2.dataset is not self.dataset
```

```
>>> text = self.dumps(newlines=True)
>>> print(text)
>>> self2 = kwcoco.CocoDataset(json.loads(text), tag='demo2')
>>> assert self2.dataset == self.dataset
>>> assert self2.dataset is not self.dataset
```

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.coerce('vidshapes1-msi-multisensor', verbose=3)
>>> self.remove_annotations(self.annots())
>>> text = self.dumps(newlines=0, indent=' ')
>>> print(text)
>>> text = self.dumps(newlines=True, indent=' ')
>>> print(text)
```

`_compress_dump_to_fileptr(file, arcname=None, indent=None, newlines=False)`

Experimental method to save compressed kwcoco files, may be folded into dump in the future.

`_dump(file, indent, newlines, compress)`

Case where we are dumping to an open file pointer. We assume this means the dataset has been written to disk.

`dump(file=None, indent=None, newlines=False, temp_file='auto', compress='auto')`

Writes the dataset out to the json format

Parameters

- **file** (*PathLike* | *IO* | *None*) – Where to write the data. Can either be a path to a file or an open file pointer / stream. If unspecified, it will be written to the current `fp`ath property.
- **indent** (*int* | *str* | *None*) – indentation for the json file. See `json.dump()` for details.
- **newlines** (*bool*) – if True, each annotation, image, category gets its own line.
- **temp_file** (*bool* | *str*) – Argument to `safer.open()`. Ignored if `file` is not a *PathLike* object. Defaults to ‘auto’, which is False on Windows and True everywhere else.

- **compress** (*bool | str*) – if True, dumps the kwcoco file as a compressed zipfile. In this case a literal IO file object must be opened in binary write mode. If auto, then it will default to False unless it can introspect the file name and the name ends with .zip

Example

```
>>> import kwcoco
>>> import ubelt as ub
>>> dpath = ub.Path.appdir('kwcoco/demo/dump').ensuredir()
>>> dset = kwcoco.CocoDataset.demo()
>>> dset.fpath = dpath / 'my_coco_file.json'
>>> # Calling dump writes to the current fpath attribute.
>>> dset.dump()
>>> assert dset.dataset == kwcoco.CocoDataset(dset.fpath).dataset
>>> assert dset.dumps() == dset.fpath.read_text()
>>> #
>>> # Using compress=True can save a lot of space and it
>>> # is transparent when reading files via CocoDataset
>>> dset.dump(compress=True)
>>> assert dset.dataset == kwcoco.CocoDataset(dset.fpath).dataset
>>> assert dset.dumps() != dset.fpath.read_text(errors='replace')
```

Example

```
>>> import kwcoco
>>> import ubelt as ub
>>> # Compression auto-defaults based on the file name.
>>> dpath = ub.Path.appdir('kwcoco/demo/dump').ensuredir()
>>> dset = kwcoco.CocoDataset.demo()
>>> fpath1 = dset.fpath = dpath / 'my_coco_file.zip'
>>> dset.dump()
>>> fpath2 = dset.fpath = dpath / 'my_coco_file.json'
>>> dset.dump()
>>> assert fpath1.read_bytes()[0:8] != fpath2.read_bytes()[0:8]
```

`_check_json_serializable(verbose=1)`

Debug which part of a coco dataset might not be json serializable

`_check_integrity()`

perform most checks

`_check_index()`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> self._check_index()
>>> # Force a failure
>>> self.index.anns.pop(1)
>>> self.index.anns.pop(2)
>>> import pytest
>>> with pytest.raises(AssertionError):
>>>     self._check_index()
```

`_abc_impl = <_abc._abc_data object>`

`_check_pointers(verbose=1)`

Check that all category and image ids referenced by annotations exist

`_build_index()`

`union(*, disjoint_tracks=True, remember_parent=False, **kwargs)`

Merges multiple `CocoDataset` items into one. Names and associations are retained, but ids may be different.

Parameters

- `*others` – a series of CocoDatasets that we will merge. Note, if called as an instance method, the “self” instance will be the first item in the “others” list. But if called like a classmethod, “others” will be empty by default.
- `disjoint_tracks (bool)` – if True, we will assume track-ids are disjoint and if two datasets share the same track-id, we will disambiguate them. Otherwise they will be copied over as-is. Defaults to True.
- `remember_parent (bool)` – if True, videos and images will save information about their parent in the “union_parent” field.
- `**kwargs` – constructor options for the new merged CocoDataset

Returns

a new merged coco dataset

Return type

`kwcoco.CocoDataset`

CommandLine

```
xdoctest -m kwcoco.coco_dataset CocoDataset.union
```

Example

```
>>> import kwcoco
>>> # Test union works with different keypoint categories
>>> dset1 = kwcoco.CocoDataset.demo('shapes1')
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> dset1.remove_keypoint_categories(['bot_tip', 'mid_tip', 'right_eye'])
>>> dset2.remove_keypoint_categories(['top_tip', 'left_eye'])
>>> dset_12a = kwcoco.CocoDataset.union(dset1, dset2)
>>> dset_12b = dset1.union(dset2)
>>> dset_21 = dset2.union(dset1)
>>> def add_hist(h1, h2):
>>>     return {k: h1.get(k, 0) + h2.get(k, 0) for k in set(h1) | set(h2)}
>>> kpfreq1 = dset1.keypoint_annotation_frequency()
>>> kpfreq2 = dset2.keypoint_annotation_frequency()
>>> kpfreq_want = add_hist(kpfreq1, kpfreq2)
>>> kpfreq_got1 = dset_12a.keypoint_annotation_frequency()
>>> kpfreq_got2 = dset_12b.keypoint_annotation_frequency()
>>> assert kpfreq_want == kpfreq_got1
>>> assert kpfreq_want == kpfreq_got2
```

```
>>> # Test disjoint gid datasets
>>> dset1 = kwcoco.CocoDataset.demo('shapes3')
>>> for new_gid, img in enumerate(dset1.dataset['images'], start=10):
>>>     for aid in dset1.gid_to_aids[img['id']]:
>>>         dset1.anns[aid]['image_id'] = new_gid
>>>     img['id'] = new_gid
>>> dset1.index.clear()
>>> dset1._build_index()
>>> #
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> for new_gid, img in enumerate(dset2.dataset['images'], start=100):
>>>     for aid in dset2.gid_to_aids[img['id']]:
>>>         dset2.anns[aid]['image_id'] = new_gid
>>>     img['id'] = new_gid
>>> dset1.index.clear()
>>> dset2._build_index()
>>> others = [dset1, dset2]
>>> merged = kwcoco.CocoDataset.union(*others)
>>> print('merged = {!r}'.format(merged))
>>> print('merged imgs = {}'.format(ub.urepr(merged.imgs, nl=1)))
>>> assert set(merged.imgs) & set([10, 11, 12, 100, 101]) == set(merged.imgs)
```

```
>>> # Test data is not preserved
>>> dset2 = kwcoco.CocoDataset.demo('shapes2')
>>> dset1 = kwcoco.CocoDataset.demo('shapes3')
>>> others = (dset1, dset2)
>>> cls = self = kwcoco.CocoDataset
>>> merged = cls.union(*others)
>>> print('merged = {!r}'.format(merged))
>>> print('merged imgs = {}'.format(ub.urepr(merged.imgs, nl=1)))
>>> assert set(merged.imgs) & set([1, 2, 3, 4, 5]) == set(merged.imgs)
```

```
>>> # Test track-ids are mapped correctly
>>> dset1 = kwcoco.CocoDataset.demo('vidshapes1')
>>> dset2 = kwcoco.CocoDataset.demo('vidshapes2')
>>> dset3 = kwcoco.CocoDataset.demo('vidshapes3')
>>> others = (dset1, dset2, dset3)
>>> for dset in others:
>>>     [a.pop('segmentation', None) for a in dset.index.anns.values()]
>>>     [a.pop('keypoints', None) for a in dset.index.anns.values()]
>>>     cls = self = kwcoco.CocoDataset
>>>     merged = cls.union(*others, disjoint_tracks=1)
>>>     print('dset1.anns = {}'.format(ub.urepr(dset1.anns, nl=1)))
>>>     print('dset2.anns = {}'.format(ub.urepr(dset2.anns, nl=1)))
>>>     print('dset3.anns = {}'.format(ub.urepr(dset3.anns, nl=1)))
>>>     print('merged.anns = {}'.format(ub.urepr(merged.anns, nl=1)))
```

Example

```
>>> import kwcoco
>>> # Test empty union
>>> empty_union = kwcoco.CocoDataset.union()
>>> assert len(empty_union.index.imgs) == 0
```

Todo:

- [] are supercategories broken?
 - [] reuse image ids where possible
 - [] reuse annotation / category ids where possible
 - [X] handle case where no inputs are given
 - [x] disambiguate track-ids
 - [x] disambiguate video-ids
-

`subset(gids, copy=False, autobuild=True)`

Return a subset of the larger coco dataset by specifying which images to port. All annotations in those images will be taken.

Parameters

- **gids** (*List[int]*) – image-ids to copy into a new dataset
- **copy** (*bool*) – if True, makes a deep copy of all nested attributes, otherwise makes a shallow copy. Defaults to True.
- **autobuild** (*bool*) – if True will automatically build the fast lookup index. Defaults to True.

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> gids = [1, 3]
>>> sub_dset = self.subset(gids)
>>> assert len(self.index.gid_to_aids) == 3
>>> assert len(sub_dset.gid_to_aids) == 2
```

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo('vidshapes2')
>>> gids = [1, 2]
>>> sub_dset = self.subset(gids, copy=True)
>>> assert len(sub_dset.index.videos) == 1
>>> assert len(self.index.videos) == 2
```

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoDataset.demo()
>>> sub1 = self.subset([1])
>>> sub2 = self.subset([2])
>>> sub3 = self.subset([3])
>>> others = [sub1, sub2, sub3]
>>> rejoined = kwcoco.CocoDataset.union(*others)
>>> assert len(sub1.anns) == 9
>>> assert len(sub2.anns) == 2
>>> assert len(sub3.anns) == 0
>>> assert rejoined.basic_stats() == self.basic_stats()
```

view_sql(*force_rewrite=False*, *memory=False*, *backend='sqlite'*, *sql_db_fpath=None*)

Create a cached SQL interface to this dataset suitable for large scale multiprocessing use cases.

Parameters

- **force_rewrite** (*bool*) – if True, forces an update to any existing cache file on disk
- **memory** (*bool*) – if True, the database is constructed in memory.
- **backend** (*str*) – sqlite or postgresql
- **sql_db_fpath** (*str* | *PathLike* | *None*) – overrides the database uri

Note: This view cache is experimental and currently depends on the timestamp of the file pointed to by `self.fpath`. In other words dont use this on in-memory datasets.

CommandLine

```
KWCOCO_WITH_POSTGRESQL=1 xdoctest -m /home/joncral/code/kwcoco/kwcoco/coco_
dataset.py CocoDataset.view_sql
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(env:KWCOCO_WITH_POSTGRESQL)
>>> # xdoctest: +REQUIRES(module:psycopg2)
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes32')
>>> postgres_dset = dset.view_sql(backend='postgresql', force_rewrite=True)
>>> sqlite_dset = dset.view_sql(backend='sqlite', force_rewrite=True)
>>> list(dset.anns.keys())
>>> list(postgres_dset.anns.keys())
>>> list(sqlite_dset.anns.keys())
```

class kwcoco.CocoImage(img, dset=None)

Bases: *_CocoObject*

An object-oriented representation of a coco image.

It provides helper methods that are specific to a single image.

This operates directly on a single coco image dictionary, but it can optionally be connected to a parent dataset, which allows it to use CocoDataset methods to query about relationships and resolve pointers.

This is different than the Images class in coco_object1d, which is just a vectorized interface to multiple objects.

Example

```
>>> import kwcoco
>>> dset1 = kwcoco.CocoDataset.demo('shapes8')
>>> dset2 = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
```

```
>>> self = kwcoco.CocoImage(dset1.imgs[1], dset1)
>>> print('self = {!r}'.format(self))
>>> print('self.channels = {}'.format(ub.urepr(self.channels, nl=1)))
```

```
>>> self = kwcoco.CocoImage(dset2.imgs[1], dset2)
>>> print('self.channels = {}'.format(ub.urepr(self.channels, nl=1)))
>>> self.primary_asset()
>>> assert 'auxiliary' in self
```

classmethod from_gid(dset, gid)

property video

Helper to grab the video for this image if it exists

property name

detach()

Removes references to the underlying coco dataset, but keeps special information such that it wont be needed.

property assets

CocoImage.iter_assets.

Type

Convinience wrapper around

Type

func

property datetime

Try to get datetime information for this image. Not always possible.

annots()

Returns

a 1d annotations object referencing annotations in this image

Return type

Annots

stats()

get(key, default=NoParam)

keys()

Proxy getter attribute for underlying *self.img* dictionary

property channels

property num_channels

property dsize

primary_image_filepath(requires=None)

primary_asset(requires=None, as_dict=True)

Compute a “main” image asset.

Note: Uses a heuristic.

- First, try to find the auxiliary image that has with the smallest distortion to the base image (if known via *warp_aux_to_img*)
 - Second, break ties by using the largest image if w / h is known
 - Last, if previous information not available use the first auxiliary image.
-

Parameters

- **requires** (*List[str] | None*) – list of attribute that must be non-None to consider an object as the primary one.
- **as_dict** (*bool*) – if True the return type is a raw dictionary. Otherwise use a newer object-oriented wrapper that should be duck-type swappable. In the future this default will change to False.

Returns

the asset dict or None if it is not found

Return type

None | dict

Todo:

- [] Add in primary heuristics

Example

```
>>> import kwarray
>>> from kwcoco.coco_image import * # NOQA
>>> rng = kwarray.ensure_rng(0)
>>> def random_asset(name, w=None, h=None):
>>>     return {'file_name': name, 'width': w, 'height': h}
>>> self = CocoImage({
>>>     'auxiliary': [
>>>         random_asset('1'),
>>>         random_asset('2'),
>>>         random_asset('3'),
>>>     ]
>>> })
>>> assert self.primary_asset()['file_name'] == '1'
>>> self = CocoImage({
>>>     'auxiliary': [
>>>         random_asset('1'),
>>>         random_asset('2', 3, 3),
>>>         random_asset('3'),
>>>     ]
>>> })
>>> assert self.primary_asset()['file_name'] == '2'
>>> #
>>> # Test new object oriented output
>>> self = CocoImage({
>>>     'file_name': 'foo',
>>>     'assets': [
>>>         random_asset('1'),
>>>         random_asset('2'),
>>>         random_asset('3'),
>>>     ],
>>> })
>>> assert self.primary_asset(as_dict=False) is self
>>> self = CocoImage({
>>>     'assets': [
>>>         random_asset('1'),
>>>         random_asset('3'),
>>>     ],
>>>     'auxiliary': [
>>>         random_asset('1'),
```

(continues on next page)

(continued from previous page)

```
>>>         random_asset('2', 3, 3),
>>>         random_asset('3'),
>>>     ]
>>> }
>>> assert self.primary_asset(as_dict=False)['file_name'] == '2'
```

`iter_image_filepaths`(*with_bundle=True*)

Could rename to `iter_asset_filepaths`

Parameters

`with_bundle` (*bool*) – If True, prepends the bundle dpath to fully specify the path. Otherwise, just returns the registered string in the `file_name` attribute of each asset. Defaults to True.

Yields

`ub.Path`

`iter_assets()`

Iterate through assets (which could include the image itself if it points to a file path).

Object-oriented alternative to `CocoImage.iter_asset_objs()`

Yields

`CocoImage | CocoAsset` – an asset object (or image object if it points to a file)

Example

```
>>> import kwcoco
>>> coco_img = kwcoco.CocoImage({'width': 128, 'height': 128})
>>> assert len(list(coco_img.iter_assets())) == 0
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> assert len(list(self.iter_assets())) > 1
>>> dset = kwcoco.CocoDataset.demo('vidshapes8')
>>> self = dset.coco_image(1)
>>> assert list(self.iter_assets()) == [self]
```

`iter_asset_objs()`

Iterate through base + auxiliary dicts that have file paths

Note: In most cases prefer `iter_assets()` instead.

Yields

`dict` – an image or auxiliary dictionary

`find_asset(channels)`

Find the asset dictionary with the specified channels

Parameters

`channels` (*str | FusedChannelSpec*) – channel names the asset must have.

Returns

`CocoImage | CocoAsset`

Example

```
>>> import kwcoco
>>> self = kwcoco.CocoImage({
>>>     'file_name': 'raw',
>>>     'channels': 'red|green|blue',
>>>     'assets': [
>>>         {'file_name': '1', 'channels': 'spam'},
>>>         {'file_name': '2', 'channels': 'eggs|jam'},
>>>     ],
>>>     'auxiliary': [
>>>         {'file_name': '3', 'channels': 'foo'},
>>>         {'file_name': '4', 'channels': 'bar|baz'},
>>>     ]
>>> )
>>> assert self.find_asset('blah') is None
>>> assert self.find_asset('red|green|blue') is self
>>> self.find_asset('foo')['file_name'] == '3'
>>> self.find_asset('baz')['file_name'] == '4'
```

find_asset_obj(channels)

Find the asset dictionary with the specified channels

In most cases use CocoImage.find_asset() instead.

Example

```
>>> import kwcoco
>>> coco_img = kwcoco.CocoImage({'width': 128, 'height': 128})
>>> coco_img.add_auxiliary_item(
>>>     'rgb.png', channels='red|green|blue', width=32, height=32)
>>> assert coco_img.find_asset_obj('red') is not None
>>> assert coco_img.find_asset_obj('green') is not None
>>> assert coco_img.find_asset_obj('blue') is not None
>>> assert coco_img.find_asset_obj('red|blue') is not None
>>> assert coco_img.find_asset_obj('red|green|blue') is not None
>>> assert coco_img.find_asset_obj('red|green|blue') is not None
>>> assert coco_img.find_asset_obj('black') is None
>>> assert coco_img.find_asset_obj('r') is None
```

Example

```
>>> # Test with concise channel code
>>> import kwcoco
>>> coco_img = kwcoco.CocoImage({'width': 128, 'height': 128})
>>> coco_img.add_auxiliary_item(
>>>     'msi.png', channels='foo.0:128', width=32, height=32)
>>> assert coco_img.find_asset_obj('foo') is None
>>> assert coco_img.find_asset_obj('foo.3') is not None
>>> assert coco_img.find_asset_obj('foo.3:5') is not None
>>> assert coco_img.find_asset_obj('foo.3000') is None
```

_assets_key()

Internal helper for transition from auxiliary -> assets in the image spec

add_annotation(ann)**

Adds an annotation to this image.

This is a convinience method, and requires that this CocoImage is still connected to a parent dataset.

Parameters

****ann** – annotation attributes (e.g. bbox, category_id)

Returns

the new annotation id

Return type

int

SeeAlso:

`kwcoco.CocoDataset.add_annotation()`

add_asset(file_name=None, channels=None, imdata=None, warp_aux_to_img=None, width=None, height=None, imwrite=False, image_id=None, **kw)

Adds an auxiliary / asset item to the image dictionary.

This operation can be done purely in-memory (the default), or the image data can be written to a file on disk (via the imwrite=True flag).

Parameters

- **file_name** (str | PathLike | None) – The name of the file relative to the bundle directory. If unspecified, imdata must be given.
- **channels** (str | kwcoco.FusedChannelSpec | None) – The channel code indicating what each of the bands represents. These channels should be disjoint wrt to the existing data in this image (this is not checked).
- **imdata** (ndarray | None) – The underlying image data this auxiliary item represents. If unspecified, it is assumed file_name points to a path on disk that will eventually exist. If imdata, file_name, and the special imwrite=True flag are specified, this function will write the data to disk.
- **warp_aux_to_img** (kwimage.Affine | None) – The transformation from this auxiliary space to image space. If unspecified, assumes this item is related to image space by only a scale factor.
- **width** (int | None) – Width of the data in auxiliary space (inferred if unspecified)
- **height** (int | None) – Height of the data in auxiliary space (inferred if unspecified)
- **imwrite** (bool) – If specified, both imdata and file_name must be specified, and this will write the data to disk. Note: it is recommended that you simply call imwrite yourself before or after calling this function. This lets you better control imwrite parameters.
- **image_id** (int | None) – An asset dictionary contains an image-id, but it should *not* be specified here. If it is, then it *must* agree with this image's id.
- ****kw** – stores arbitrary key/value pairs in this new asset.

Todo:

- [] Allow imwrite to specify an executor that is used to

return a Future so the imwrite call does not block.

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> coco_img = dset.coco_image(1)
>>> imdata = np.random.rand(32, 32, 5)
>>> channels = kwcoco.FusedChannelSpec.coerce('Aux:5')
>>> coco_img.add_asset(imdata=imdata, channels=channels)
```

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset()
>>> gid = dset.add_image(name='my_image_name', width=200, height=200)
>>> coco_img = dset.coco_image(gid)
>>> coco_img.add_asset('path/img1_B0.tif', channels='B0', width=200, height=200)
>>> coco_img.add_asset('path/img1_B1.tif', channels='B1', width=200, height=200)
>>> coco_img.add_asset('path/img1_B2.tif', channels='B2', width=200, height=200)
>>> coco_img.add_asset('path/img1_TCI.tif', channels='r|g|b', width=200, height=200)
```

`imdelay(channels=None, space='image', resolution=None, bundle_dpath=None, interpolation='linear', antialias=True, nodata_method=None, RESOLUTION_KEY=None)`

Perform a delayed load on the data in this image.

The delayed load can load a subset of channels, and perform lazy warping operations. If the underlying data is in a tiled format this can reduce the amount of disk IO needed to read the data if only a small crop or lower resolution view of the data is needed.

Note: This method is experimental and relies on the delayed load proof-of-concept.

Parameters

- **gid** (*int*) – image id to load
- **channels** (*kwcoco.FusedChannelSpec*) – specific channels to load. if unspecified, all channels are loaded.
- **space** (*str*) – can either be “image” for loading in image space, or “video” for loading in video space.
- **resolution** (*None | str | float*) – If specified, applies an additional scale factor to the result such that the data is loaded at this specified resolution. This requires that the image / video has a registered resolution attribute and that its units agree with this request.

Todo:

- [] This function could stand to have a better name. Maybe `imread` with a `delayed=True` flag? Or maybe just `delayed_load`?
-

Example

```
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> gid = 1
>>> #
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = CocoImage(dset.imgs[gid], dset)
>>> delayed = self.imdelay()
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> #
>>> dset = kwcoco.CocoDataset.demo('shapes8')
>>> delayed = dset.coco_image(gid).imdelay()
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

```
>>> crop = delayed.crop((slice(0, 3), slice(0, 3)))
>>> crop.finalize()
```

```
>>> # TODO: should only select the "red" channel
>>> dset = kwcoco.CocoDataset.demo('shapes8')
>>> delayed = CocoImage(dset.imgs[gid], dset).imdelay(channels='r')
```

```
>>> import kwcoco
>>> gid = 1
>>> #
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> delayed = dset.coco_image(gid).imdelay(channels='B1|B2', space='image')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> delayed = dset.coco_image(gid).imdelay(channels='B1|B2|B11', space='image')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
>>> delayed = dset.coco_image(gid).imdelay(channels='B8|B1', space='video')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

```
>>> delayed = dset.coco_image(gid).imdelay(channels='B8|foo|bar|B1', space=
>>>     ~'video')
>>> print('delayed = {!r}'.format(delayed))
>>> print('delayed.finalize() = {!r}'.format(delayed.finalize()))
```

Example

```
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo()
>>> coco_img = dset.coco_image(1)
>>> # Test case where nothing is registered in the dataset
>>> delayed = coco_img.imdelay()
>>> final = delayed.finalize()
>>> assert final.shape == (512, 512, 3)
```

```
>>> delayed = coco_img.imdelay()
>>> final = delayed.finalize()
>>> print('final.shape = {}'.format(ub.urepr(final.shape, nl=1)))
>>> assert final.shape == (512, 512, 3)
```

Example

```
>>> # Test that delay works when imdata is stored in the image
>>> # dictionary itself.
>>> from kwCOCO.coco_image import * # NOQA
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes8-multispectral')
>>> coco_img = dset.coco_image(1)
>>> imdata = np.random.rand(6, 6, 5)
>>> imdata[:] = np.arange(5)[None, None, :]
>>> channels = kwCOCO.FusedChannelSpec.coerce('Aux:5')
>>> coco_img.add_auxiliary_item(imdata=imdata, channels=channels)
>>> delayed = coco_img.imdelay(channels='B1|Aux:2:4')
>>> final = delayed.finalize()
```

Example

```
>>> # Test delay when loading in asset space
>>> from kwCOCO.coco_image import * # NOQA
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image(1)
>>> stream1 = coco_img.channels.streams()[0]
>>> stream2 = coco_img.channels.streams()[1]
>>> asset_delayed = coco_img.imdelay(stream1, space='asset')
>>> img_delayed = coco_img.imdelay(stream1, space='image')
>>> vid_delayed = coco_img.imdelay(stream1, space='video')
>>> #
>>> aux_imdata = asset_delayed.as_xarray().finalize()
>>> img_imdata = img_delayed.as_xarray().finalize()
>>> assert aux_imdata.shape != img_imdata.shape
>>> # Cannot load multiple asset items at the same time in
>>> # asset space
>>> import pytest
>>> fused_channels = stream1 | stream2
```

(continues on next page)

(continued from previous page)

```
>>> from delayed_image.delayed_nodes import CoordinateCompatibilityError
>>> with pytest.raises(CoordinateCompatibilityError):
>>>     aux_delayed2 = coco_img.imdelay(fused_channels, space='asset')
```

Example

```
>>> # Test loading at a specific resolution.
>>> from kwcoco.coco_image import * # NOQA
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image(1)
>>> coco_img.img['resolution'] = '1 meter'
>>> img_delayed1 = coco_img.imdelay(space='image')
>>> vid_delayed1 = coco_img.imdelay(space='video')
>>> # test with unitless request
>>> img_delayed2 = coco_img.imdelay(space='image', resolution=3.1)
>>> vid_delayed2 = coco_img.imdelay(space='video', resolution='3.1 meter')
>>> np.ceil(img_delayed1.shape[0] / 3.1) == img_delayed2.shape[0]
>>> np.ceil(vid_delayed1.shape[0] / 3.1) == vid_delayed2.shape[0]
>>> # test with unitless data
>>> coco_img.img['resolution'] = 1
>>> img_delayed2 = coco_img.imdelay(space='image', resolution=3.1)
>>> vid_delayed2 = coco_img.imdelay(space='video', resolution='3.1 meter')
>>> np.ceil(img_delayed1.shape[0] / 3.1) == img_delayed2.shape[0]
>>> np.ceil(vid_delayed1.shape[0] / 3.1) == vid_delayed2.shape[0]
```

`valid_region(space='image')`

If this image has a valid polygon, return it in image, or video space

Returns

None | kwimage.MultiPolygon

`property warp_vid_from_img`

Affine transformation that warps image space -> video space.

Returns

The transformation matrix

Return type

kwimage.Affine

`property warp_img_from_vid`

Affine transformation that warps video space -> image space.

Returns

The transformation matrix

Return type

kwimage.Affine

`_warp_for_resolution(space, resolution=None)`

Compute a transform from image-space to the requested space at a target resolution.

`_annot_segmentation(ann, space='video', resolution=None)`

” Load annotation segmentations in a requested space at a target resolution.

Example

```
>>> from kwCOCO.coco_image import * # NOQA
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image(1)
>>> coco_img.img['resolution'] = '1 meter'
>>> ann = coco_img.annots().objs[0]
>>> img_sseg = coco_img._annot_segmentation(ann, space='image')
>>> vid_sseg = coco_img._annot_segmentation(ann, space='video')
>>> img_sseg_2m = coco_img._annot_segmentation(ann, space='image', resolution=
...>>> '2 meter')
>>> vid_sseg_2m = coco_img._annot_segmentation(ann, space='video', resolution=
...>>> '2 meter')
>>> print(f'img_sseg.area      = {img_sseg.area}')
>>> print(f'vid_sseg.area      = {vid_sseg.area}')
>>> print(f'img_sseg_2m.area = {img_sseg_2m.area}')
>>> print(f'vid_sseg_2m.area = {vid_sseg_2m.area}')
```

`_annot_segmentations(anns, space='video', resolution=None)`

” Load multiple annotation segmentations in a requested space at a target resolution.

Example

```
>>> from kwCOCO.coco_image import * # NOQA
>>> import kwCOCO
>>> dset = kwCOCO.CocoDataset.demo('vidshapes8-msi-multisensor')
>>> coco_img = dset.coco_image(1)
>>> coco_img.img['resolution'] = '1 meter'
>>> ann = coco_img.annots().objs[0]
>>> img_sseg = coco_img._annot_segmentations([ann], space='image')
>>> vid_sseg = coco_img._annot_segmentations([ann], space='video')
>>> img_sseg_2m = coco_img._annot_segmentations([ann], space='image',_
...>>> resolution='2 meter')
>>> vid_sseg_2m = coco_img._annot_segmentations([ann], space='video',_
...>>> resolution='2 meter')
>>> print(f'img_sseg.area      = {img_sseg[0].area}')
>>> print(f'vid_sseg.area      = {vid_sseg[0].area}')
>>> print(f'img_sseg_2m.area = {img_sseg_2m[0].area}')
>>> print(f'vid_sseg_2m.area = {vid_sseg_2m[0].area}')
```

`resolution(space='image', channel=None, RESOLUTION_KEY=None)`

Returns the resolution of this CocoImage in the requested space if known. Errors if this information is not registered.

Parameters

- **space** (*str*) – the space to the resolution of. Can be either “image”, “video”, or “asset”.
- **channel** (*str* | *kwCOCO.FusedChannelSpec* | *None*) – a channel that identifies a single asset, only relevant if asking for asset space

Returns

has items mag (with the magnitude of the resolution) and unit, which is a convinience and

only loosely enforced.

Return type

Dict

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> self.img['resolution'] = 1
>>> self.resolution()
>>> self.img['resolution'] = '1 meter'
>>> self.resolution(space='video')
{'mag': (1.0, 1.0), 'unit': 'meter'}
>>> self.resolution(space='asset', channel='B11')
>>> self.resolution(space='asset', channel='B1')
```

_scalefactor_for_resolution(*space*, *resolution*, *channel*=None, *RESOLUTION_KEY*=None)

Given image or video space, compute the scale factor needed to achieve the target resolution.

Use this to implement scale_resolution_from_img scale_resolution_from_vid

Parameters

- **space** (str) – the space to the resolution of. Can be either “image”, “video”, or “asset”.
- **resolution** (str | float | int) – the resolution (ideally with units) you want.
- **channel** (str | kwcoco.FusedChannelSpec | None) – a channel that identifies a single asset, only relevant if asking for asset space

Returns

the x and y scale factor that can be used to scale the underlying “space” to achieve the requested resolution.

Return type

Tuple[float, float]

_detections_for_resolution(*space*=‘video’, *resolution*=None, *aids*=None, *RESOLUTION_KEY*=None)

This is slightly less than ideal in terms of API, but it will work for now.

add_auxiliary_item(kwargs)****delay(**kwargs)****show(**kwargs)**


Show the image with matplotlib if possible

SeeAlso:

`kwcoco.CocoDataset.show_image()`

Example

```
>>> # xdoctest: +REQUIRES(module:kwplot)
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autopl()t()
>>> self.show()
```

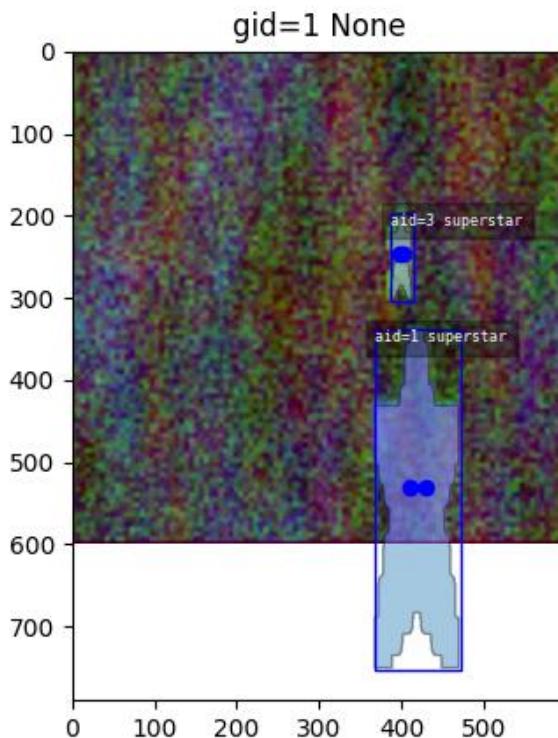

draw(kwargs)**


Draw the image on an ndarray using opencv

SeeAlso:

`kwcoco.CocoDataset.draw_image()`

Example

```
>>> import kwcoco
>>> dset = kwcoco.CocoDataset.demo('vidshapes8-multispectral')
>>> self = dset.coco_image(1)
>>> canvas = self.draw()
>>> # xdoctest: +REQUIRES(--show)
>>> import kwplot
>>> kwplot.autompl()
>>> kwplot.imshow(canvas)
```

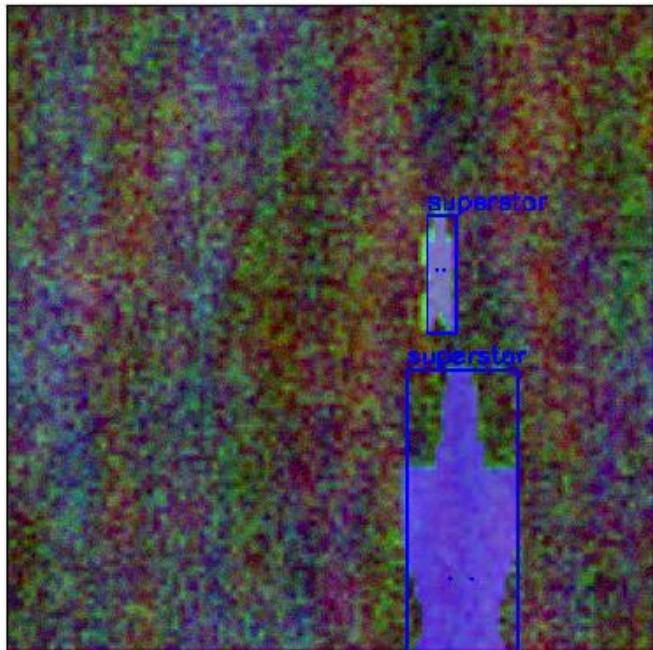

```
class kwcoco.CocoSqlDatabase(uri=None, tag=None, img_root=None)
```

Bases: *AbstractCocoDataset*, *MixinCocoAccessors*, *MixinCocoObjects*, *MixinCocoStats*, *MixinCocoDraw*, *NiceRepr*

Provides an API nearly identical to `kwcoco.CocoDatabase`, but uses an SQL backend data store. This makes it robust to copy-on-write memory issues that arise when forking, as discussed in¹.

Note: By default constructing an instance of the `CocoSqlDatabase` does not create a connection to the database. Use the `connect()` method to open a connection.

¹ <https://github.com/pytorch/pytorch/issues/13246>

References

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> sql_dset, dct_dset = demo()
>>> dset1, dset2 = sql_dset, dct_dset
>>> tag1, tag2 = 'dset1', 'dset2'
>>> assert_dsets_allclose(sql_dset, dct_dset)
```

`MEMORY_URI` = `'sqlite:///memory:'`

`classmethod coerce(data, backend=None)`

Create an SQL CocoDataset from the input pointer.

Example

```
import kwcoco dset = kwcoco.CocoDataset.demo('shapes8') data = dset.fpath self = CocoSqlDatabase.coerce(data)

from kwcoco.coco_sql_dataset import CocoSqlDatabase import kwcoco dset = kwcoco.CocoDataset.coerce('spacenet7.kwcoco.json')

self = CocoSqlDatabase.coerce(dset)

from kwcoco.coco_sql_dataset import CocoSqlDatabase sql_dset = CocoSqlDatabase.coerce('spacenet7.kwcoco.json')

# from kwcoco.coco_sql_dataset import CocoSqlDatabase import kwcoco sql_dset = kwcoco.CocoDataset.coerce('_spacenet7.kwcoco.view.v006.sqlite')
```

`disconnect()`

Drop references to any SQL or cache objects

`connect(readonly=False, verbose=0)`

Connects this instance to the underlying database.

References

details on read only mode, some of these didnt seem to work <https://github.com/sqlalchemy/sqlalchemy/blob/master/lib/sqlalchemy/dialects/sqlite/pysqlite.py#L71> <https://github.com/pudo/dataset/issues/136> <https://writeonly.wordpress.com/2009/07/16/simple-read-only-sqlalchemy-sessions/>

CommandLine

```
KWCOCO_WITH_POSTGRESQL=1 xdoctest -m /home/joncrall/code/kwcoco/kwcoco/coco_sql_
dataset.py CocoSqlDatabase.connect
```

Example

```
>>> # xdoctest: +REQUIRES(env:KWCOCO_WITH_POSTGRESQL)
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(module:psycopg2)
>>> from kwCOCO.coco_sql_dataset import * # NOQA
>>> dset = CocoSqlDatabase('postgresql+psycopg2://kwCOCO:kwCOCO_'
->>> pw@localhost:5432/mydb')
>>> self = dset
>>> dset.connect(verbose=1)
```

property fpath

delete(verbose=0)

table_names()

populate_from(dset, verbose=1)

Copy the information in a `CocoDataset` into this SQL database.

CommandLine

```
xdoctest -m kwCOCO.coco_sql_dataset CocoSqlDatabase.populate_from:1
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwCOCO.coco_sql_dataset import _benchmark_dset_readtime # NOQA
>>> import kwCOCO
>>> from kwCOCO.coco_sql_dataset import *
>>> dset2 = dset = kwCOCO.CocoDataset.demo()
>>> dset2.clear_annotations()
>>> dset1 = self = CocoSqlDatabase('sqlite:///memory:')
>>> self.connect()
>>> self.populate_from(dset)
>>> dset1_images = list(dset1.dataset['images'])
>>> print('dset1_images = {}'.format(ub.urepr(dset1_images, nl=1)))
>>> print(dset2.dumps(newlines=True))
>>> assert_dsets_allclose(dset1, dset2, tag1='sql', tag2='dct')
>>> ti_sql = _benchmark_dset_readtime(dset1, 'sql')
>>> ti_dct = _benchmark_dset_readtime(dset2, 'dct')
>>> print('ti_sql.rankings = {}'.format(ub.urepr(ti_sql.rankings, nl=2,
->>> precision=6, align=':')))
>>> print('ti_dct.rankings = {}'.format(ub.urepr(ti_dct.rankings, nl=2,
->>> precision=6, align=':')))
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwCOCO.coco_sql_dataset import _benchmark_dset_readtime # NOQA
>>> import kwCOCO
>>> from kwCOCO.coco_sql_dataset import *
>>> dset2 = dset = kwCOCO.CocoDataset.demo('vidshapes1')
>>> dset1 = self = CocoSqlDatabase('sqlite:///memory:')
>>> self.connect()
>>> self.populate_from(dset)
>>> for tablename in dset1.dataset.keys():
>>>     print(tablename)
>>>     table = dset1.pandas_table(tablename)
>>>     print(table)
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwCOCO.coco_sql_dataset import _benchmark_dset_readtime # NOQA
>>> import kwCOCO
>>> from kwCOCO.coco_sql_dataset import *
>>> dset2 = dset = kwCOCO.CocoDataset.demo()
>>> dset1 = self = CocoSqlDatabase('sqlite:///memory:')
>>> self.connect()
>>> self.populate_from(dset)
>>> assert_dsets_allclose(dset1, dset2, tag1='sql', tag2='dct')
>>> ti_sql = _benchmark_dset_readtime(dset1, 'sql')
>>> ti_dct = _benchmark_dset_readtime(dset2, 'dct')
>>> print('ti_sql.rankings = {}'.format(ub.repr(ti_sql.rankings, nl=2,
... -precision=6, align=':')))
>>> print('ti_dct.rankings = {}'.format(ub.repr(ti_dct.rankings, nl=2,
... -precision=6, align=':')))
```

CommandLine

```
KWCOCO_WITH_POSTGRESQL=1 xdoctest -m /home/joncrall/code/kwCOCO/kwCOCO/coco_sql_
dataset.py CocoSqlDatabase.populate_from:1
```

Example

```
>>> # xdoctest: +REQUIRES(env:KWCOCO_WITH_POSTGRESQL)
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(module:psycopg2)
>>> from kwCOCO.coco_sql_dataset import * # NOQA
>>> import kwCOCO
>>> dset = dset2 = kwCOCO.CocoDataset.demo()
>>> self = dset1 = CocoSqlDatabase('postgresql+psycopg2://kwCOCO:kwCOCO_'
... -pw@localhost:5432/test_populate')
```

(continues on next page)

(continued from previous page)

```
>>> self.delete(verbose=1)
>>> self.connect(verbose=1)
>>> #self.populate_from(dset)
```

```
property dataset
property anns
property cats
property imgs
property name_to_cat
pandas_table(table_name, strict=False)
```

Loads an entire SQL table as a pandas DataFrame

Parameters

table_name (str) – name of the table

Returns

pandas.DataFrame

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> # xdoctest: +REQUIRES(module:pandas)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> self, dset = demo()
>>> table_df = self.pandas_table('annotations')
>>> print(table_df)
>>> table_df = self.pandas_table('categories')
>>> print(table_df)
>>> table_df = self.pandas_table('videos')
>>> print(table_df)
>>> table_df = self.pandas_table('images')
>>> print(table_df)
>>> table_df = self.pandas_table('tracks')
>>> print(table_df)
```

```
raw_table(table_name)
```

```
_raw_tables()
```

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcocoo.coco_sql_dataset import * # NOQA
>>> import pandas as pd
>>> self, dset = demo()
>>> targets = self._raw_tables()
>>> for tblname, table in targets.items():
...     print(f'tblname={tblname}')
...     print(pd.DataFrame(table))
```

_column_lookup(tablename, key, rowids, default=NoParam, keepid=False)

Convinience method to lookup only a single column of information

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcocoo.coco_sql_dataset import * # NOQA
>>> self, dset = demo(10)
>>> tablename = 'annotations'
>>> key = 'category_id'
>>> rowids = list(self.annts.keys())[::-3]
>>> cids1 = self._column_lookup(tablename, key, rowids)
>>> cids2 = self.annots(rowids).get(key)
>>> cids3 = dset.annots(rowids).get(key)
>>> assert cids3 == cids2 == cids1
>>> # Test json columns work
>>> vals1 = self._column_lookup(tablename, 'bbox', rowids)
>>> vals2 = self.annots(rowids).lookup('bbox')
>>> vals3 = dset.annots(rowids).lookup('bbox')
>>> assert vals1 == vals2 == vals3
>>> vals1 = self._column_lookup(tablename, 'segmentation', rowids)
>>> vals2 = self.annots(rowids).lookup('segmentation')
>>> vals3 = dset.annots(rowids).lookup('segmentation')
>>> assert vals1 == vals2 == vals3
```

_all_rows_column_lookup(tablename, keys)

Convinience method to look up all rows from a table and only a few columns.

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcocoo.coco_sql_dataset import * # NOQA
>>> self, dset = demo(10)
>>> tablename = 'annotations'
>>> keys = ['id', 'category_id']
>>> rows = self._all_rows_column_lookup(tablename, keys)
```

tabular_targets()

Convinience method to create an in-memory summary of basic annotation properties with minimal SQL overhead.

Example

```
>>> # xdoctest: +REQUIRES(module:sqlalchemy)
>>> from kwcoco.coco_sql_dataset import * # NOQA
>>> self, dset = demo()
>>> targets = self.tabular_targets()
>>> print(targets.pandas())
```

`_table_names()`

`property bundle_dpath`

`property data_fpath`
data_fpath is an alias of fpath

`_orig_coco_fpath()`
Hack to reconstruct the original name. Makes assumptions about how naming is handled elsewhere. There should be centralized logic about how to construct side-car names that can be queried for inversely like this.

`_abc_impl = <_abc._abc_data object>`

`_cached_hashid()`
Compatibility with the way the existing cached hashid in the coco dataset is used. Both of these functions are private and subject to change (and need optimization).

`class kwcoco.FusedChannelSpec(parsed, _is_normalized=False)`
Bases: BaseChannelSpec
A specific type of channel spec with only one early fused stream.
The channels in this stream are non-commutative
Behaves like a list of atomic-channel codes (which may represent more than 1 channel), normalized codes always represent exactly 1 channel.

Note: This class name and API is in flux and subject to change.

Todo: A special code indicating a name and some number of bands that that names contains, this would primarily be used for large numbers of channels produced by a network. Like:

resnet_d35d060_L5:512

or

resnet_d35d060_L5[:512]

might refer to a very specific (hashed) set of resnet parameters with 512 bands

maybe we can do something slicily like:

resnet_d35d060_L5[A:B] resnet_d35d060_L5:A:B

Do we want to “just store the code” and allow for parsing later?

Or do we want to ensure the serialization is parsed before we construct the data structure?

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> import pickle
>>> self = FusedChannelSpec.coerce(3)
>>> recon = pickle.loads(pickle.dumps(self))
>>> self = ChannelSpec.coerce('a|b,c|d')
>>> recon = pickle.loads(pickle.dumps(self))

(alias_lut = {'dx dy': ['dx', 'dy'], 'fx fy': ['fx', 'fy'], 'rgb': ['r', 'g', 'b'],
'rgba': ['r', 'g', 'b', 'a']}

_memo = {'B1': <FusedChannelSpec(B1)>, 'B10': <FusedChannelSpec(B10)>, 'B11':
<FusedChannelSpec(B11)>, 'B8': <FusedChannelSpec(B8)>, 'B8a':
<FusedChannelSpec(B8a)>}

_size_lut = {'dx dy': 2, 'fx fy': 2, 'rgb': 3, 'rgba': 4}

classmethod concat(items)

property spec

unique()

classmethod parse(spec)

classmethod coerce(data)
```

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> FusedChannelSpec.coerce(['a', 'b', 'c'])
>>> FusedChannelSpec.coerce('a|b|c')
>>> FusedChannelSpec.coerce(3)
>>> FusedChannelSpec.coerce(FusedChannelSpec(['a']))
>>> assert FusedChannelSpec.coerce('') .numel() == 0
```

concise()

Shorted the channel spec by de-normaliz slice syntax

Returns

concise spec

Return type

FusedChannelSpec

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> self = FusedChannelSpec.coerce(
...     'b|a|a.0|a.1|a.2|a.5|c|a.8|a.9|b.0:3|c.0')
>>> short = self.concise()
>>> long = short.normalize()
>>> numels = [c.numel() for c in [self, short, long]]
>>> print('self.spec = {!r}'.format(self.spec))
>>> print('short.spec = {!r}'.format(short.spec))
>>> print('long.spec = {!r}'.format(long.spec))
>>> print('numels = {!r}'.format(numels))
self.spec = 'b|a|a.0|a.1|a.2|a.5|c|a.8|a.9|b.0:3|c.0'
short.spec = 'b|a|a:3|a.5|c|a.8:10|b:3|c.0'
long.spec = 'b|a|a.0|a.1|a.2|a.5|c|a.8|a.9|b.0|b.1|b.2|c.0'
numels = [13, 13, 13]
>>> assert long.concise().spec == short.spec
```

normalize()

Replace aliases with explicit single-band-per-code specs

Returns

normalize spec

Return type

FusedChannelSpec

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> self = FusedChannelSpec.coerce('b1|b2|b3|rgb')
>>> normed = self.normalize()
>>> print('self = {}'.format(self))
>>> print('normed = {}'.format(normed))
self = <FusedChannelSpec(b1|b2|b3|rgb)>
normed = <FusedChannelSpec(b1|b2|b3|r|g|b)>
>>> self = FusedChannelSpec.coerce('B:1:11')
>>> normed = self.normalize()
>>> print('self = {}'.format(self))
>>> print('normed = {}'.format(normed))
self = <FusedChannelSpec(B:1:11)>
normed = <FusedChannelSpec(B.1|B.2|B.3|B.4|B.5|B.6|B.7|B.8|B.9|B.10)>
>>> self = FusedChannelSpec.coerce('B.1:11')
>>> normed = self.normalize()
>>> print('self = {}'.format(self))
>>> print('normed = {}'.format(normed))
self = <FusedChannelSpec(B.1:11)>
normed = <FusedChannelSpec(B.1|B.2|B.3|B.4|B.5|B.6|B.7|B.8|B.9|B.10)>
```

numel()

Total number of channels in this spec

sizes()

Returns a list indicating the size of each atomic code

Returns

List[int]

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> self = FusedChannelSpec.coerce('b1|Z:3|b2|b3|rgb')
>>> self.sizes()
[1, 3, 1, 1, 3]
>>> assert(FusedChannelSpec.parse('a.0').numel() == 1
>>> assert(FusedChannelSpec.parse('a:0').numel() == 0
>>> assert(FusedChannelSpec.parse('a:1').numel() == 1
```

code_list()

Return the expanded code list

as_list()**as_oerset()****as_set()****to_set()****to_oerset()****to_list()****as_path()**

Returns a string suitable for use in a path.

Note, this may no longer be a valid channel spec

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> self = FusedChannelSpec.coerce('b1|Z:3|b2|b3|rgb')
>>> self.as_path()
b1_Z..3_b2_b3_rgb
```

difference(*other*)

Set difference

Example

```
>>> FCS = FusedChannelSpec.coerce
>>> self = FCS('rgb|disparity|flowx|flowy')
>>> other = FCS('r|b')
>>> self.difference(other)
>>> other = FCS('flowx')
>>> self.difference(other)
>>> FCS = FusedChannelSpec.coerce
```

(continues on next page)

(continued from previous page)

```
>>> assert len((FCS('a') - {'a'}).parsed) == 0
>>> assert len((FCS('a.0:3') - {'a.0'}).parsed) == 2
```

intersection(*other*)

Example

```
>>> FCS = FusedChannelSpec.coerce
>>> self = FCS('rgb|disparity|flowx|flowy')
>>> other = FCS('r|b|XX')
>>> self.intersection(other)
```

union(*other*)

Example

```
>>> from delayed_image.channel_spec import * # NOQA
>>> FCS = FusedChannelSpec.coerce
>>> self = FCS('rgb|disparity|flowx|flowy')
>>> other = FCS('r|b|XX')
>>> self.union(other)
```

issubset(*other*)

issuperset(*other*)

component_indices(*axis*=2)

Look up component indices within this stream

Example

```
>>> FCS = FusedChannelSpec.coerce
>>> self = FCS('disparity|rgb|flowx|flowy')
>>> component_indices = self.component_indices()
>>> print('component_indices = {}'.format(ub.urepr(component_indices, nl=1,
... dict_sort_behavior='old')))
component_indices = {
    'disparity': (slice(...), slice(...), slice(0, 1, None)),
    'flowx': (slice(...), slice(...), slice(4, 5, None)),
    'flowy': (slice(...), slice(...), slice(5, 6, None)),
    'rgb': (slice(...), slice(...), slice(1, 4, None)),
}
```

streams()

Idempotence with *ChannelSpec.streams()*

fuse()

Idempotence with *ChannelSpec.streams()*

```
class kwcocoo.SensorChanSpec(spec: str)
```

Bases: NiceRepr

The public facing API for the sensor / channel specification

Example

```
>>> # xdoctest: +REQUIRES(module:lark)
>>> from delayed_image.sensorchan_spec import SensorChanSpec
>>> self = SensorChanSpec('(L8,S2):BGR,WV:BGR,S2:nir,L8:land.0:4')
>>> s1 = self.normalize()
>>> s2 = self.concise()
>>> streams = self.streams()
>>> print(s1)
>>> print(s2)
>>> print('streams = {}'.format(ub.urepr(streams, sv=1, nl=1)))
L8:BGR,S2:BGR,WV:BGR,S2:nir,L8:land.0|land.1|land.2|land.3
(L8,S2,WV):BGR,L8:land:4,S2:nir
streams = [
    L8:BGR,
    S2:BGR,
    WV:BGR,
    S2:nir,
    L8:land.0|land.1|land.2|land.3,
]
```

Example

```
>>> # Check with generic sensors
>>> # xdoctest: +REQUIRES(module:lark)
>>> from delayed_image.sensorchan_spec import SensorChanSpec
>>> import delayed_image
>>> self = SensorChanSpec('(*):BGR,:BGR,:nir,:land.0:4')
>>> self.concise().normalize()
>>> s1 = self.normalize()
>>> s2 = self.concise()
>>> print(s1)
>>> print(s2)
*:BGR,:BGR,:nir,:land.0|land.1|land.2|land.3
(*):BGR,:nir,land:4
>>> import delayed_image
>>> c = delayed_image.ChannelSpec.coerce('BGR,BGR,nir,land.0:8')
>>> c1 = c.normalize()
>>> c2 = c.concise()
>>> print(c1)
>>> print(c2)
```

Example

```
>>> # Check empty channels
>>> # xdoctest: +REQUIRES(module:lark)
>>> from delayed_image.sensorchan_spec import SensorChanSpec
>>> import delayed_image
>>> print(SensorChanSpec('*:').normalize())
*:
>>> print(SensorChanSpec('sen:').normalize())
sen:
>>> print(SensorChanSpec('sen:').normalize().concise())
sen:
>>> print(SensorChanSpec('sen:').concise().normalize().concise())
sen:
```

classmethod coerce(data)

Attempt to interpret the data as a channel specification

Returns

SensorChanSpec

Example

```
>>> # xdoctest: +REQUIRES(module:lark)
>>> from delayed_image.sensorchan_spec import * # NOQA
>>> from delayed_image.sensorchan_spec import SensorChanSpec
>>> data = SensorChanSpec.coerce(3)
>>> assert SensorChanSpec.coerce(data).normalize().spec == '*:u0|u1|u2'
>>> data = SensorChanSpec.coerce(3)
>>> assert data.spec == 'u0|u1|u2'
>>> assert SensorChanSpec.coerce(data).spec == 'u0|u1|u2'
>>> data = SensorChanSpec.coerce('u:3')
>>> assert data.normalize().spec == '*:u.0|u.1|u.2'
```

normalize()

concise()

Example

```
>>> # xdoctest: +REQUIRES(module:lark)
>>> from delayed_image import SensorChanSpec
>>> a = SensorChanSpec.coerce('Cam1:(red,blue)')
>>> b = SensorChanSpec.coerce('Cam2:(blue,green)')
>>> c = (a + b).concise()
>>> print(c)
(Cam1,Cam2):blue,Cam1:red,Cam2:green
>>> # Note the importance of parenthesis in the previous example
>>> # otherwise channels will be assigned to `*` the generic sensor.
>>> a = SensorChanSpec.coerce('Cam1:red,blue')
>>> b = SensorChanSpec.coerce('Cam2:blue,green')
```

(continues on next page)

(continued from previous page)

```
>>> c = (a + b).concise()
>>> print(c)
(*,Cam2):blue,*:green,Cam1:red
```

streams()**Returns**

List of sensor-names and fused channel specs

Return type

List[FusedSensorChanSpec]

late_fuse(*others)**Example**

```
>>> # xdoctest: +REQUIRES(module:lark)
>>> import delayed_image
>>> from delayed_image import sensorchan_spec
>>> import delayed_image
>>> delayed_image.SensorChanSpec = sensorchan_spec.SensorChanSpec # hack for 3.
>>> a = delayed_image.SensorChanSpec.coerce('A|B|C,edf')
>>> b = delayed_image.SensorChanSpec.coerce('A12')
>>> c = delayed_image.SensorChanSpec.coerce('')
>>> d = delayed_image.SensorChanSpec.coerce('rgb')
>>> print(a.late_fuse(b).spec)
>>> print((a + b).spec)
>>> print((b + a).spec)
>>> print((a + b + c).spec)
>>> print(sum([a, b, c, d]).spec)
A|B|C,edf,A12
A|B|C,edf,A12
A12,A|B|C,edf
A|B|C,edf,A12
A|B|C,edf,A12,rgb
>>> import delayed_image
>>> a = delayed_image.SensorChanSpec.coerce('A|B|C,edf').normalize()
>>> b = delayed_image.SensorChanSpec.coerce('A12').normalize()
>>> c = delayed_image.SensorChanSpec.coerce('').normalize()
>>> d = delayed_image.SensorChanSpec.coerce('rgb').normalize()
>>> print(a.late_fuse(b).spec)
>>> print((a + b).spec)
>>> print((b + a).spec)
>>> print((a + b + c).spec)
>>> print(sum([a, b, c, d]).spec)
*:A|B|C,:edf,:A12
*:A|B|C,:edf,:A12
*:A12,:A|B|C,:edf
*:A|B|C,:edf,:A12,*
*:A|B|C,:edf,:A12,*:rgb
>>> print((a.late_fuse(b)).concise())
```

(continues on next page)

(continued from previous page)

```
>>> print(((a + b)).concise())
>>> print(((b + a)).concise())
>>> print(((a + b + c)).concise())
>>> print((sum([a, b, c, d])).concise())
*: (A|B|C, edf, A12)
*: (A|B|C, edf, A12)
*: (A12, A|B|C, edf)
*: (A|B|C, edf, A12, )
*: (A|B|C, edf, A12, , r|g|b)
```

Example

```
>>> # Test multi-arg case
>>> import delayed_image
>>> a = delayed_image.SensorChanSpec.coerce('A|B|C,edf')
>>> b = delayed_image.SensorChanSpec.coerce('A12')
>>> c = delayed_image.SensorChanSpec.coerce('')
>>> d = delayed_image.SensorChanSpec.coerce('rgb')
>>> others = [b, c, d]
>>> print(a.late_fuse(*others).spec)
>>> print(delayed_image.SensorChanSpec.late_fuse(a, b, c, d).spec)
A|B|C,edf,A12,rgb
A|B|C,edf,A12,rgb
```

matching_sensor(*sensor*)

Get the components corresponding to a specific sensor

Parameters

sensor (*str*) – the name of the sensor to match

Example

```
>>> # xdoctest: +REQUIRES(module:lark)
>>> import delayed_image
>>> self = delayed_image.SensorChanSpec.coerce('(S1,S2):(a|b|c),S2:c|d|e')
>>> sensor = 'S2'
>>> new = self.matching_sensor(sensor)
>>> print(f'new={new}')
new=S2:a|b|c,S2:c|d|e
>>> print(self.matching_sensor('S1'))
S1:a|b|c
>>> print(self.matching_sensor('S3'))
S3:
```

property chans

Returns the channel-only spec, ONLY if all of the sensors are the same

Example

```
>>> # xdoctest: +REQUIRES(module:lark)
>>> import delayed_image
>>> self = delayed_image.SensorChanSpec.coerce('(S1,S2):(a|b|c),S2:c|d|e')
>>> import pytest
>>> with pytest.raises(Exception):
>>>     self.chans
>>> print(self.matching_sensor('S1').chans.spec)
>>> print(self.matching_sensor('S2').chans.spec)
a|b|c
a|b|c,c|d|e
```


BIBLIOGRAPHY

- [PowersMetrics] <https://csem.flinders.edu.au/research/techreps/SIE07001.pdf>
- [MatlabBM] <https://www.mathworks.com/matlabcentral/fileexchange/5648-bm-cm?requestedDomain=www.mathworks.com>
- [MulticlassMCC] Jurman, Riccadonna, Furlanello, (2012). A Comparison of MCC and CEN Error Measures in MultiClass Prediction
- [Voluptuous] <https://pypi.org/project/voluptuous>
- [CocoFormat] <http://cocodataset.org/#format-data>
- [PyCocoToolsMask] <https://github.com/nightrome/cocostuffapi/blob/master/PythonAPI/pycocotools/mask.py>
- [CocoTutorial] <https://www.immersivelimit.com/tutorials/create-coco-annotations-from-scratch/#coco-dataset-format>

PYTHON MODULE INDEX

k

kwcoco, 358
kwcoco.__init__, 1
kwcoco.__main__, 234
kwcoco._helpers, 234
kwcoco.abstract_coco_dataset, 236
kwcoco.category_tree, 237
kwcoco.channel_spec, 242
kwcoco.cli, 24
kwcoco.cli.__main__, 9
kwcoco.cli.coco_conform, 9
kwcoco.cli.coco_eval, 10
kwcoco.cli.coco_grab, 12
kwcoco.cli.coco_modify_categories, 13
kwcoco.cli.coco_move, 14
kwcoco.cli.coco_reroot, 15
kwcoco.cli.coco_show, 16
kwcoco.cli.coco_split, 17
kwcoco.cli.coco_stats, 18
kwcoco.cli.coco_subset, 19
kwcoco.cli.coco_toydata, 21
kwcoco.cli.coco_union, 22
kwcoco.cli.coco_validate, 23
kwcoco.coco_dataset, 242
kwcoco.coco_evaluator, 298
kwcoco.coco_image, 304
kwcoco.coco_objects1d, 320
kwcoco.coco_schema, 333
kwcoco.coco_sql_dataset, 334
kwcoco.compat_dataset, 350
kwcoco.data, 28
kwcoco.data.grab_camvid, 24
kwcoco.data.grab_datasets, 26
kwcoco.data.grab_domainnet, 26
kwcoco.data.grab_spacenet, 26
kwcoco.data.grab_voc, 27
kwcoco.demo, 72
kwcoco.demo.boids, 28
kwcoco.demo.perterb, 32
kwcoco.demo.toydata, 34
kwcoco.demo.toydata_image, 47
kwcoco.demo.toydata_video, 53

kwcoco.demo.toypatterns, 68
kwcoco.exceptions, 354
kwcoco.kpf, 355
kwcoco.kw18, 355
kwcoco.metrics, 123
kwcoco.metrics.assignment, 72
kwcoco.metrics.clf_report, 76
kwcoco.metrics.confusion_measures, 79
kwcoco.metrics.confusion_vectors, 90
kwcoco.metrics.detect_metrics, 99
kwcoco.metrics.drawing, 109
kwcoco.metrics.functional, 117
kwcoco.metrics.sklearn_alts, 118
kwcoco.metrics.voc_metrics, 120
kwcoco.sensorchan_spec, 358
kwcoco.util, 215
kwcoco.util.delayed_ops, 151
kwcoco.util.dict_like, 189
kwcoco.util.dict_proxy2, 190
kwcoco.util.jsonschema_elements, 194
kwcoco.util.lazy_frame_backends, 200
kwcoco.util.util_archive, 200
kwcoco.util.util_deprecate, 202
kwcoco.util.util_eval, 202
kwcoco.util.util_futures, 203
kwcoco.util.util_json, 207
kwcoco.util.util_monkey, 209
kwcoco.util.util_parallel, 210
kwcoco.util.util_reroot, 211
kwcoco.util.util_sklearn, 212
kwcoco.util.util_special_json, 213
kwcoco.util.util_truncate, 214
kwcoco.util.util_windows, 214

INDEX

Symbols

_3dplot() (*kwcoco.metrics.BinaryConfusionVectors method*), 125
_3dplot() (*kwcoco.metrics.confusion_vectors.BinaryConfusionVectors method*), 98
_AliasMetaclass (*class in kwcoco.util.dict_proxy2*), 191
_CLI (*in module kwcoco.cli.coco_conform*), 10
_CLI (*in module kwcoco.cli.coco_eval*), 12
_CLI (*in module kwcoco.cli.coco_grab*), 13
_CLI (*in module kwcoco.cli.coco_modify_categories*), 14
_CLI (*in module kwcoco.cli.coco_reroot*), 16
_CLI (*in module kwcoco.cli.coco_show*), 17
_CLI (*in module kwcoco.cli.coco_split*), 18
_CLI (*in module kwcoco.cli.coco_stats*), 19
_CLI (*in module kwcoco.cli.coco_subset*), 21
_CLI (*in module kwcoco.cli.coco_toydata*), 22
_CLI (*in module kwcoco.cli.coco_union*), 23
_CLI (*in module kwcoco.cli.coco_validate*), 24
_CocoObject (*class in kwcoco.coco_image*), 304
_ID_Remapper (*class in kwcoco._helpers*), 234
_NextId (*class in kwcoco._helpers*), 234
__torrent_voc() (*in module kwcoco.data.grab_voc*), 27
_abc_impl (*kwcoco.AbstractCocoDataset attribute*), 364
_abc_impl (*kwcoco.CocoDataset attribute*), 387
_abc_impl (*kwcoco.CocoSqlDatabase attribute*), 410
_abc_impl (*kwcoco._helpers.SortedSet attribute*), 236
_abc_impl (*kwcoco.abstract_coco_dataset.AbstractCocoDataset attribute*), 236
_abc_impl (*kwcoco.coco_dataset.CocoDataset attribute*), 293
_abc_impl (*kwcoco.coco_sql_dataset.CocoSqlDatabase attribute*), 349
_abc_impl (*kwcoco.compat_dataset.COCO attribute*), 354
_abc_impl (*kwcoco.util.IndexableWalker attribute*), 226
_abc_impl (*kwcoco.util.StratifiedGroupKFold attribute*), 230
_abc_impl (*kwcoco.util.util_sklearn.StratifiedGroupKFold attribute*), 213
_add_annotation() (*kwcoco.coco_dataset.CocoIndex method*), 283
_add_annotations() (*kwcoco.coco_dataset.CocoIndex method*), 283
_add_category() (*kwcoco.coco_dataset.CocoIndex method*), 283
_add_image() (*kwcoco.coco_dataset.CocoIndex method*), 282
_add_images() (*kwcoco.coco_dataset.CocoIndex method*), 283
_add_track() (*kwcoco.coco_dataset.CocoIndex method*), 283
_add_video() (*kwcoco.coco_dataset.CocoIndex method*), 282
_alias_lut (*kwcoco.FusedChannelSpec attribute*), 411
_alias_to_cat() (*kwcoco.coco_dataset.MixinCocoAccessors method*), 248
_all_rows_column_lookup() (*kwcoco.CocoSqlDatabase method*), 409
_all_rows_column_lookup() (*kwcoco.coco_sql_dataset.CocoSqlDatabase method*), 348
_annot_segmentation() (*kwcoco.CocoImage method*), 400
_annot_segmentation() (*kwcoco.coco_image.CocoImage method*), 314
_annot_segmentations() (*kwcoco.CocoImage method*), 401
_annot_segmentations() (*kwcoco.coco_image.CocoImage method*), 314
_annots_set_sorted_by_frame_index() (*kwcoco.coco_dataset.CocoIndex method*), 282
_aspycoco() (*kwcoco.coco_dataset.MixinCocoExtras method*), 258
_assets_key() (*kwcoco.CocoImage method*), 395
_assets_key() (*kwcoco.coco_image.CocoImage method*), 309
_assign_confusion_vectors() (*in module kwcoco.metrics.assignment*), 73
_available_backends (*kwcoco.util.Archive attribute*), 217
_available_backends (*kwcoco.util.util_archive.Archive attribute*), 217

`coco.util.util_archive.Archive` attribute), `201`

`_available_zipfile_compressions()` (in module `kwcoco.util.util_archive`), `201`

`_average_precision()` (in module `coco.metrics.functional`), `118`

`_bbox_h` (`kwcoco.coco_sql_dataset.Annotation` tribute), `339`

`_bbox_w` (`kwcoco.coco_sql_dataset.Annotation` tribute), `339`

`_bbox_x` (`kwcoco.coco_sql_dataset.Annotation` tribute), `338`

`_bbox_y` (`kwcoco.coco_sql_dataset.Annotation` tribute), `339`

`_benchmark_dict_proxy_ops()` (in module `coco.coco_sql_dataset`), `350`

`_benchmark_dset_readtime()` (in module `coco.coco_sql_dataset`), `350`

`_binary_clf_curve2()` (in module `coco.metrics.sklearn_alts`), `119`

`_binary_clf_curves()` (kw-
 `coco.metrics.BinaryConfusionVectors` method), `125`

`_binary_clf_curves()` (kw-
 `coco.metrics.confusion_vectors.BinaryConfusionVectors` method), `98`

`_build_dmet()` (`kwcoco.coco_evaluator.CocoEvaluator` method), `301`

`_build_hashid()` (kw-
 `coco.coco_dataset.MixinCocoExtras` method), `254`

`_build_index()` (`kwcoco.CategoryTree` method), `369`

`_build_index()` (`kwcoco.CocoDataset` method), `387`

`_build_index()` (`kwcoco.category_tree.CategoryTree` method), `241`

`_build_index()` (`kwcoco.coco_dataset.CocoDataset` method), `293`

`_cached_hashid()` (`kwcoco.CocoSqlDatabase` method), `410`

`_cached_hashid()` (kw-
 `coco.coco_dataset.MixinCocoExtras` method), `255`

`_cached_hashid()` (kw-
 `coco.coco_sql_dataset.CocoSqlDatabase` method), `349`

`_cached_hashid_for()` (kw-
 `coco.coco_dataset.MixinCocoExtras` method), `255`

`_check_index()` (`kwcoco.CocoDataset` method), `386`

`_check_index()` (`kwcoco.coco_dataset.CocoDataset` method), `292`

`_check_integrity()` (`kwcoco.CocoDataset` method), `386`

`_check_integrity()` (kw-
 `coco.coco_dataset.CocoDataset` method), `292`

`_check_json_serializable()` (`kwcoco.CocoDataset` method), `386`

`_check_json_serializable()` (`coco.coco_dataset.CocoDataset` method), `292`

`_check_pointers()` (`kwcoco.CocoDataset` method), `387`

`_check_pointers()` (`coco.coco_dataset.CocoDataset` method), `293`

`_clear_completed()` (`kwcoco.util.util_futures.JobPool` method), `205`

`_coco_image()` (`kwcoco.coco_dataset.MixinCocoAccessors` method), `250`

`_coerce_dets()` (`kwcoco.coco_evaluator.CocoEvaluator` class method), `301`

`_coerce_zipfile_compression()` (in module `kwcoco.util.util_archive`), `201`

`_column_lookup()` (`kwcoco.CocoSqlDatabase` method), `409`

`_column_lookup()` (kw-
 `coco.coco_sql_dataset.CocoSqlDatabase` method), `348`

`_combine_threshold()` (in module `coco.metrics.confusion_measures`), `86`

`_compress_dump_to_fileptr()` (kw-
 `coco.CocoDataset` method), `385`

`_compress_dump_to_fileptr()` (kw-
 `coco.coco_dataset.CocoDataset` method), `291`

`_convert_voc_split()` (in module `coco.data.grab_voc`), `27`

`_critical_loop()` (in module `coco.metrics.assignment`), `75`

`_dataset_id()` (`kwcoco.coco_dataset.MixinCocoExtras` method), `255`

`_decl_class_registry` (kw-
 `coco.coco_sql_dataset.FallbackCocoBase` attribute), `335`

`_default_categories` (kw-
 `coco.demo.toypatterns.CategoryPatterns` attribute), `69`

`_default_catnames` (kw-
 `coco.demo.toypatterns.CategoryPatterns` attribute), `69`

`_default_keypoint_categories` (kw-
 `coco.demo.toypatterns.CategoryPatterns` attribute), `69`

`_define_camvid_class_hierarchy()` (in module `kwcoco.data.grab_camvid`), `25`

`_delay_load_imglike()` (in module `kwcoco.coco_image`), `320`

_delitems() (in module `kwcoco._helpers`), 236
`_demo_construct_probs()` (in module `coco.demo.perterb`), 33
`_demo_construct_probs()` (in module `coco.metrics.detect_metrics`), 108
`_demo_item()` (`kwcoco.ChannelSpec` method), 375
`_detections_for_resolution()` (`kwcoco.CocoImage` method), 402
`_detections_for_resolution()` (kw-
`coco.coco_image.CocoImage` method), 316
`_devcheck_load_sub_image()` (in module `kw-
coco.data.grab_camvid), 24
_devcheck_sample_full_image() (in module kw-
coco.data.grab_camvid), 24
_draw_video_sequence() (in module kw-
coco.demo.toydata_video), 61
_dump() (kwcoco.CocoDataset method), 385
_dump() (kwcoco.coco_dataset.CocoDataset method),
 291
_ensure_image_data() (kw-
coco.coco_dataset.MixinCocoExtras method),
 256
_ensure_imgszie() (kw-
coco.coco_dataset.MixinCocoExtras method),
 256
_ensure_init() (kwcoco.coco_evaluator.CocoEvaluator
method), 300
_ensure_json_serializable() (kw-
coco.coco_dataset.MixinCocoExtras method),
 258
_ensure_kw18_column_order() (in module kw-
coco.kw18), 358
_fast_pdist_priority() (in module kw-
coco.metrics.assignment), 75
_filter_ignore_regions() (in module kw-
coco.metrics.assignment), 75
_finalize() (kwcoco.util.delayed_ops.DelayedAsXarray
method), 152
_finalize() (kwcoco.util.delayed_ops.DelayedChannelConcat
method), 153
_finalize() (kwcoco.util.delayed_ops.DelayedCrop
method), 158
_finalize() (kwcoco.util.delayed_ops.DelayedDequantize
method), 161
_finalize() (kwcoco.util.delayed_ops.DelayedIdentity
method), 162
_finalize() (kwcoco.util.delayed_ops.DelayedLoad
method), 171
_finalize() (kwcoco.util.delayed_ops.DelayedNans
method), 172
_finalize() (kwcoco.util.delayed_ops.DelayedOperation
method), 174
_finalize() (kwcoco.util.delayed_ops.DelayedOverview
method), 176
_finalize() (kwcoco.util.delayed_ops.DelayedWarp
method), 180
_from_elem() (kwcoco.demo.toypatterns.CategoryPatterns
method), 71
_get_img_auxiliary() (kw-
coco.coco_dataset.MixinCocoAccessors
method), 245
_handle_sql_uri() (in module kw-
coco.coco_sql_dataset), 343
_id_to_obj (kwcoco.coco_objects1d.ObjectList1D
property), 321
_image_corruption_check() (in module kw-
coco.helpers), 236
_images_set_sorted_by_frame_index() (kw-
coco.coco_dataset.CocoIndex method), 282
_infer_dirs() (kwcoco.CocoDataset method), 381
_infer_dirs() (kwcoco.coco_dataset.CocoDataset
method), 287
_init() (kwcoco.coco_evaluator.CocoEvaluator
method), 300
_invalidate_hashid() (kw-
coco.coco_dataset.MixinCocoExtras method),
 255
_item_shapes() (kwcoco.ChannelSpec method), 375
_iter_get() (kwcoco.coco_objects1d.ObjectList1D
method), 323
_iter_test_masks() (kw-
coco.util.StratifiedGroupKFold method),
 230
_iter_test_masks() (kw-
coco.util.util_sklearn.StratifiedGroupKFold
method), 213
_json.dumps() (in module kw-
coco.util.util_special_json), 213
_json_lines.dumps() (in module kw-
coco.util.util_special_json), 213
_keypoint_category_names() (kw-
coco.coco_dataset.MixinCocoAccessors
method), 250
_leaf_paths() (kwcoco.util.delayed_ops.DelayedOperation
method), 173
_leafs() (kwcoco.util.delayed_ops.DelayedOperation
method), 173
_load_and_postprocess() (in module kw-
coco.helpers), 236
_load_dets() (in module kwcoco.coco_evaluator), 303
_load_dets_worker() (in module kw-
coco.coco_evaluator), 304
_load_metadata() (kw-
coco.util.delayed_ops.DelayedLoad method),
 171
_load_multiple() (kwcoco.CocoDataset class
method), 383
_load_multiple() (kwcoco.coco_dataset.CocoDataset`

class method), 289

`_load_reference()` (kw-
 coco.util.delayed_ops.DelayedLoad method), 171

`_lookup()` (*kwcoco.coco_objects1d.ObjectGroups method), 325*

`_lookup()` (*kwcoco.coco_objects1d.ObjectList1D method), 324*

`_lookup_kpnames()` (kw-
 coco.coco_dataset.MixinCocoAccessors method), 250

`_lut_annot_frame_index()` (in module *kw-
 coco_helpers*), 235

`_lut_frame_index()` (in module *kwcoco.helpers*), 235

`_lut_image_frame_index()` (in module *kw-
 coco_helpers*), 235

`_make_test_folds()` (kw-
 coco.util.StratifiedGroupKFold method), 230

`_make_test_folds()` (kw-
 *coco.util.util_sklearn.StratifiedGroupKFold
 method), 212*

`_memo (kwcoco.FusedChannelSpec attribute), 411`

`_new_proxy_cache()` (in module *kw-
 coco.coco_sql_dataset*), 339

`_normalize_intensity_if_needed()` (in module *kw-
 coco.coco_dataset*), 269

`_open()` (*kwcoco.util.Archive class method*), 217

`_open()` (*kwcoco.util.util_archive.Archive class method*), 201

`_opt_absorb_overview()` (kw-
 coco.util.delayed_ops.DelayedWarp method), 181

`_opt_crop_after_overview()` (kw-
 *coco.util.delayed_ops.DelayedOverview
 method), 176*

`_opt_dequant_after_crop()` (kw-
 coco.util.delayed_ops.DelayedCrop method), 161

`_opt_dequant_after_overview()` (kw-
 *coco.util.delayed_ops.DelayedOverview
 method), 178*

`_opt_dequant_before_other()` (kw-
 *coco.util.delayed_ops.DelayedDequantize
 method), 162*

`_opt_fuse_crops()` (kw-
 coco.util.delayed_ops.DelayedCrop method), 159

`_opt_fuse_overview()` (kw-
 *coco.util.delayed_ops.DelayedOverview
 method), 178*

`_opt_fuse_warps()` (kw-
 coco.util.delayed_ops.DelayedWarp method), 181

`_opt_overview_as_warp()` (kw-
 *coco.util.delayed_ops.DelayedOverview
 method), 176*

`_opt_push_under_concat()` (kw-
 coco.util.delayed_ops.DelayedImage method), 165

`_opt_split_warp_overview()` (kw-
 coco.util.delayed_ops.DelayedWarp method), 182

`_opt_warp_after_crop()` (kw-
 coco.util.delayed_ops.DelayedCrop method), 160

`_opt_warp_after_overview()` (kw-
 *coco.util.delayed_ops.DelayedOverview
 method), 178*

`_optimized_crop()` (kw-
 coco.util.delayed_ops.DelayedNans method), 172

`_optimized_warp()` (kw-
 coco.util.delayed_ops.DelayedNans method), 172

`_orig_coco_fpath()` (*kwcoco.CocoSqlDatabase
 method*), 410

`_orig_coco_fpath()` (kw-
 *coco.coco_sql_dataset.CocoSqlDatabase
 method*), 349

`_orm_yielder()` (in module *kwcoco.coco_sql_dataset*), 339

`_package_info()` (kw-
 *coco.demo.toypatterns.CategoryPatterns
 method*), 71

`_padded_crop()` (*kwcoco.util.delayed_ops.ImageOpsMixin
 method*), 186

`_postprocess_absolute()` (in module *kw-
 coco.cli.coco_union*), 23

`_pr_curves()` (in module *kwcoco.metrics.functional*), 117

`_pr_curves()` (in module *kwcoco.metrics.voc_metrics*), 121

`_push_operation_under()` (kw-
 *coco.util.delayed_ops.DelayedChannelConcat
 method*), 155

`_pygame_render_boids()` (in module *kw-
 coco.demo.boids*), 32

`_raw_tables()` (*kwcoco.CocoSqlDatabase method*), 408

`_raw_tables()` (*kwcoco.coco_sql_dataset.CocoSqlDatabase
 method*), 348

`_raw_yielder()` (in module *kwcoco.coco_sql_dataset*), 339

`_read_split_paths()` (in module *kw-
 coco.data.grab_voc*), 27

`_realpos_label_suffix()` (in module *kw-
 coco.metrics.drawing*), 110

| | | |
|---|--------------------------------|--|
| <code>_rectify_classes()</code> | (kw- | <code>coco.coco_sql_dataset.Category attribute),</code> |
| <code>coco.coco_evaluator.CocoEvaluator</code> | class | <code>336</code> |
| <code>method)</code> , 301 | | |
| <code>_register_imagename()</code> | (kw- | <code>_sa_class_manager (kwcoco.coco_sql_dataset.Image</code> |
| <code>coco.metrics.DetectionMetrics</code> | method), | <code>attribute), 337</code> |
| 132 | | |
| <code>_register_imagename()</code> | (kw- | <code>_sa_class_manager (kwcoco.coco_sql_dataset.KeypointCategory</code> |
| <code>coco.metrics.detect_metrics.DetectionMetrics</code> | method), | <code>attribute), 336</code> |
| 101 | | |
| <code>_remove_all_annotations()</code> | (kw- | <code>_sa_class_manager (kwcoco.coco_sql_dataset.Track</code> |
| <code>coco.coco_dataset.CocoIndex method)</code> , 283 | method), | <code>attribute), 338</code> |
| <code>_remove_all_images()</code> | (kw- | <code>_sa_class_manager (kwcoco.coco_sql_dataset.Video</code> |
| <code>coco.coco_dataset.CocoIndex method)</code> , 283 | method), | <code>attribute), 337</code> |
| <code>_remove_annotations()</code> | (kw- | <code>_scalefactor_for_resolution()</code> (kw- |
| <code>coco.coco_dataset.CocoIndex method)</code> , 283 | method), | <code>coco.CocoImage method), 402</code> |
| <code>_remove_categories()</code> | (kw- | <code>_scalefactor_for_resolution()</code> (kw- |
| <code>coco.coco_dataset.CocoIndex method)</code> , 283 | method), | <code>coco.coco_image.CocoImage method), 315</code> |
| <code>_remove_images()</code> | (kwcoco.coco_dataset.CocoIndex | <code>_set (kwcoco.coco_dataset.CocoIndex attribute), 282</code> |
| <code>method)</code> , 283 | | |
| <code>_remove_tracks()</code> | (kwcoco.coco_dataset.CocoIndex | <code>_set() (kwcoco.coco_objects1d.ObjectList1D method),</code> |
| <code>method)</code> , 283 | | <code>324</code> |
| <code>_remove_videos()</code> | (kwcoco.coco_dataset.CocoIndex | <code>_set_alchemy_mode()</code> (kw- |
| <code>method)</code> , 283 | | <code>coco.util.delayed_ops.DelayedOperation</code> |
| <code>_resolve_to_ann()</code> | (kw- | <code>method), 175</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>_set_sorted_by_frame_index()</code> (kw- |
| <code>method)</code> , 247 | | <code>coco.coco_dataset.CocoIndex method), 282</code> |
| <code>_resolve_to_cat()</code> | (kw- | <code>_size_lut (kwcoco.FusedChannelSpec attribute), 411</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>_spatial_index_scratch() (in module kw-</code> |
| <code>method)</code> , 248 | | <code>coco.demo.boids), 31</code> |
| <code>_resolve_to_cid()</code> | (kw- | <code>_special_kwkcoco_pretty_dumps_orig() (in module</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>kwcoco.util.util_special_json), 213</code> |
| <code>method)</code> , 247 | | <code>_stabilize_data() (in module kw-</code> |
| <code>_resolve_to_gid()</code> | (kw- | <code>coco.metrics.confusion_vectors), 99</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>_summarize() (in module kw-</code> |
| <code>method)</code> , 247 | | <code>coco.metrics.detect_metrics), 109</code> |
| <code>_resolve_to_id()</code> | (kw- | <code>_summary() (kwcoco.metrics.confusion_measures.OneVersusRestMeasureC</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>method), 89</code> |
| <code>method)</code> , 247 | | <code>_table_names() (kwcoco.CocoSqlDatabase method),</code> |
| <code>_resolve_to_img()</code> | (kw- | <code>410</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>_table_names() (kwcoco.coco_sql_dataset.CocoSqlDatabase</code> |
| <code>method)</code> , 247 | | <code>method), 349</code> |
| <code>_resolve_to_kpcat()</code> | (kw- | <code>_to_coco() (kwcoco.metrics.DetectionMetrics method),</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>134</code> |
| <code>method)</code> , 247 | | <code>_to_coco() (kwcoco.metrics.detect_metrics.DetectionMetrics</code> |
| <code>_resolve_to_trackid()</code> | (kw- | <code>method), 102</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>_todo_refactor_geometric_info() (kw-</code> |
| <code>method)</code> , 247 | | <code>coco.demo.toypatterns.CategoryPatterns</code> |
| <code>_resolve_to_vidid()</code> | (kw- | <code>method), 70</code> |
| <code>coco.coco_dataset.MixinCocoAccessors</code> | | <code>_transform_from_subdata() (kw-</code> |
| <code>method)</code> , 247 | | <code>coco.util.delayed_ops.DelayedCrop method),</code> |
| <code>_sa_class_manager</code> | (kw- | <code>158</code> |
| <code>coco.coco_sql_dataset.Annotation attribute),</code> | | <code>_transform_from_subdata() (kw-</code> |
| 339 | | <code>coco.util.delayed_ops.DelayedDequantize</code> |
| <code>_sa_class_manager</code> | (kw- | <code>method), 162</code> |

_transform_from_subdata() (kw-
coco.util.delayed_ops.DelayedImage method),
164

_transform_from_subdata() (kw-
coco.util.delayed_ops.DelayedOverview
method), 176

_transform_from_subdata() (kw-
coco.util.delayed_ops.DelayedWarp method),
181

_traverse() (kwcoco.util.delayed_ops.DelayedOperation
method), 173

_traversed_graph() (kw-
coco.util.delayed_ops.DelayedOperation
method), 174

_tree() (kwcoco.coco_dataset.MixinCocoExtras
method), 253

_trunc_op() (in module kwcoco.util.util_truncate), 214

_truncated_roc() (in module kw-
coco.metrics.functional), 117

_uncached_getitem() (kw-
coco.coco_sql_dataset.SqlDictProxy method),
341

_uncached_getitem() (kw-
coco.coco_sql_dataset.SqlIdGroupDictProxy
method), 343

_unstructured (kwcoco.coco_sql_dataset.Annotation
attribute), 339

_unstructured (kwcoco.coco_sql_dataset.Category at-
tribute), 336

_unstructured (kwcoco.coco_sql_dataset.Image
attribute), 337

_unstructured (kwcoco.coco_sql_dataset.KeypointCategory
attribute), 336

_unstructured (kwcoco.coco_sql_dataset.Track at-
tribute), 338

_unstructured (kwcoco.coco_sql_dataset.Video
attribute), 337

_update_fpath() (kwcoco.CocoDataset method), 381

_update_fpath() (kwcoco.coco_dataset.CocoDataset
method), 287

_update_unused() (kwcoco._helpers._NextId method),
234

_validate() (kwcoco.util.delayed_ops.DelayedChannelCopy
method), 155

_validate() (kwcoco.util.delayed_ops.DelayedImage
method), 164

_voc_ave_precision() (in module kw-
coco.metrics.voc_metrics), 122

_voc_eval() (in module kwcoco.metrics.voc_metrics),
122

_walk() (kwcoco.util.IndexableWalker method), 224

_warp_for_resolution() (kwcoco.CocoImage
method), 400

_warp_for_resolution() (kw-

coco.coco_image.CocoImage method), 314

_writefig() (in module kwcoco.coco_evaluator), 303

_yeah_boid() (in module kwcoco.demo.boids), 32

A

AbstractCocoDataset (class in kwcoco), 364

AbstractCocoDataset (class in kw-
coco.abstract_coco_dataset), 236

add() (kwcoco.util.Archive method), 217

add() (kwcoco.util.util_archive.Archive method), 201

add_annotation() (kw-
coco.coco_dataset.MixinCocoAddRemove
method), 272

add_annotation() (kwcoco.coco_image.CocoImage
method), 309

add_annotation() (kwcoco.CocoImage method), 396

add_annotations() (kw-
coco.coco_dataset.MixinCocoAddRemove
method), 276

add_asset() (kwcoco.coco_dataset.MixinCocoAddRemove
method), 271

add_asset() (kwcoco.coco_image.CocoImage method),
309

add_asset() (kwcoco.CocoImage method), 396

add_auxiliary_item() (kw-
coco.coco_dataset.MixinCocoAddRemove
method), 271

add_auxiliary_item() (kw-
coco.coco_image.CocoImage method), 316

add_auxiliary_item() (kwcoco.CocoImage method),
402

add_category() (kwcoco.coco_dataset.MixinCocoAddRemove
method), 274

add_image() (kwcoco.coco_dataset.MixinCocoAddRemove
method), 270

add_images() (kwcoco.coco_dataset.MixinCocoAddRemove
method), 276

add_metaclass() (kwcoco.util.util_monkey.Reloadable
class method), 210

add_predictions() (kw-
coco.metrics.detect_metrics.DetectionMetrics
method), 101

add_predictions() (kwcoco.metrics.DetectionMetrics
method), 133

add_predictions() (kw-
coco.metrics.voc_metrics.VOC_Metrics
method), 120

add_track() (kwcoco.coco_dataset.MixinCocoAddRemove
method), 275

add_truth() (kwcoco.metrics.detect_metrics.DetectionMetrics
method), 101

add_truth() (kwcoco.metrics.DetectionMetrics
method), 133

add_truth() (`kwcoco.metrics.voc_metrics.VOC_Metrics method`), 120

add_video() (`kwcoco.coco_dataset.MixinCocoAddRemove method`), 269

AddError, 354

aids (`kwcoco.coco_objects1d.Annots property`), 329

aids (`kwcoco.coco_objects1d.Images property`), 328

alias (`kwcoco.coco_sql_dataset.Category attribute`), 336

alias (`kwcoco.coco_sql_dataset.KeypointCategory attribute`), 336

AliasedDictProxy (`class in kwcoco.util.dict_proxy2`), 191

allclose() (`kwcoco.util.IndexableWalker method`), 224

ALLOF() (`in module kwcoco.util`), 215

ALLOF() (`in module kwcoco.util.jsonschema_elements`), 198

ALLOF() (`kwcoco.util.jsonschema_elements.QuantifierElements method`), 196

ALLOF() (`kwcoco.util.QuantifierElements method`), 228

Annotation (`class in kwcoco.coco_sql_dataset`), 338

AnnotGroups (`class in kwcoco.coco_objects1d`), 331

Annots (`class in kwcoco.coco_objects1d`), 328

annots (`kwcoco.coco_objects1d.Images property`), 328

annots (`kwcoco.coco_objects1d.Tracks property`), 331

annots() (`kwcoco.coco_dataset.MixinCocoObjects method`), 260

annots() (`kwcoco.coco_image.CocoImage method`), 305

annots() (`kwcoco.coco_image.CocoTrack method`), 320

annots() (`kwcoco.CocoImage method`), 392

anns (`kwcoco.coco_dataset.MixinCocoIndex property`), 284

anns (`kwcoco.coco_sql_dataset.CocoSqlDatabase property`), 347

anns (`kwcoco.CocoSqlDatabase property`), 408

annToMask() (`kwcoco.compat_dataset.COCO method`), 354

annToRLE() (`kwcoco.compat_dataset.COCO method`), 353

ANY (`kwcoco.util.jsonschema_elements.QuantifierElements property`), 196

ANY (`kwcoco.util.QuantifierElements property`), 228

ANYOF() (`in module kwcoco.util`), 215

ANYOF() (`in module kwcoco.util.jsonschema_elements`), 198

ANYOF() (`kwcoco.util.jsonschema_elements.QuantifierElements method`), 196

ANYOF() (`kwcoco.util.QuantifierElements method`), 228

Archive (`class in kwcoco.util`), 215

Archive (`class in kwcoco.util.util_archive`), 200

area (`kwcoco.coco_objects1d.Images property`), 327

ARRAY() (`in module kwcoco.util`), 215

ARRAY() (`in module kwcoco.util.jsonschema_elements`), 198

ARRAY() (`kwcoco.util.ContainerElements method`), 217

ARRAY() (`kwcoco.util.jsonschema_elements.ContainerElements method`), 196

as_completed() (`kwcoco.util.util_futures.JobPool method`), 205

as_graph() (`kwcoco.util.delayed_ops.DelayedOperation method`), 173

as_list() (`kwcoco.FusedChannelSpec method`), 413

as_oset() (`kwcoco.FusedChannelSpec method`), 413

as_path() (`kwcoco.ChannelSpec method`), 373

as_path() (`kwcoco.FusedChannelSpec method`), 413

as_set() (`kwcoco.FusedChannelSpec method`), 413

as_xarray() (`kwcoco.util.delayed_ops.DelayedChannelConcat method`), 155

as_xarray() (`kwcoco.util.delayed_ops.ImageOpsMixin method`), 188

asdict() (`kwcoco.util.dict_like.DictLike method`), 190

asdict() (`kwcoco.util.DictLike method`), 219

assert_dsets_allclose() (`in module kwcoco.coco_sql_dataset`), 349

assets (`kwcoco.coco_image.CocoImage property`), 305

assets (`kwcoco.CocoImage property`), 392

attribute_frequency() (`kwcoco.coco_objects1d.ObjectList1D method`), 325

auxiliary (`kwcoco.coco_sql_dataset.Image attribute`), 337

B

basic_stats() (`kwcoco.coco_dataset.MixinCocoStats method`), 265

bbox (`kwcoco.coco_sql_dataset.Annotation attribute`), 338

binarize_classless() (`kwcoco.metrics.confusion_vectors.ConfusionVectors method`), 93

binarize_classless() (`kwcoco.metrics.ConfusionVectors method`), 130

BinaryConfusionVectors (`class in kwcoco.metrics`), 123

BinaryConfusionVectors (`class in kwcoco.metrics.confusion_vectors`), 96

block_seen() (`kwcoco._helpers._ID_Remapper method`), 235

Boids (`class in kwcoco.demo.boids`), 28

BOOLEAN (`kwcoco.util.jsonschema_elements.ScalarElements property`), 195

BOOLEAN (`kwcoco.util.ScalarElements property`), 228

boundary_conditions() (*kwcoco.demo.boids.Boids method*), 30
boxes (*kwcoco.coco_objects1d.Annots property*), 330
boxsize_stats() (*kwcoco.coco_dataset.MixinCocoStats method*), 266
build() (*kwcoco.coco_dataset.CocoIndex method*), 283
build() (*kwcoco.coco_sql_dataset.CocoSqlIndex method*), 343
bundle_dpath (*kwcoco.coco_image._CocoObject property*), 304
bundle_dpath (*kwcoco.coco_sql_dataset.CocoSqlDatabase property*), 349
bundle_dpath (*kwcoco.CocoSqlDatabase property*), 410

C

cached_sql_coco_view() (*in module kwcoco.coco_sql_dataset*), 349
caption (*kwcoco.coco_sql_dataset.Annotation attribute*), 339
caption (*kwcoco.coco_sql_dataset.Video attribute*), 337
Categories (*class in kwcoco.coco_objects1d*), 325
categories() (*kwcoco.coco_dataset.MixinCocoObjects method*), 261
Category (*class in kwcoco.coco_sql_dataset*), 335
category_annotation_frequency() (*kwcoco.coco_dataset.MixinCocoStats method*), 263
category_annotation_type_frequency() (*kwcoco.coco_dataset.MixinCocoDeprecate method*), 243
category_graph() (*kwcoco.coco_dataset.MixinCocoAccessors method*), 249
category_id (*kwcoco.coco_objects1d.Annots property*), 329
category_id (*kwcoco.coco_sql_dataset.Annotation attribute*), 338
category_names (*kwcoco.category_tree.CategoryTree property*), 241
category_names (*kwcoco.CategoryTree property*), 368
category_names (*kwcoco.coco_objects1d.Annots property*), 329
CategoryPatterns (*class in kwcoco.demo.toypatterns*), 68
CategoryTree (*class in kwcoco*), 364
CategoryTree (*class in kwcoco.category_tree*), 237
catname (*kwcoco.metrics.BinaryConfusionVectors property*), 124
catname (*kwcoco.metrics.confusion_measures.Measures property*), 80
catname (*kwcoco.metrics.confusion_vectors.BinaryConfusionVectors property*), 97
catname (*kwcoco.metrics.Measures property*), 141
cats (*kwcoco.category_tree.CategoryTree property*), 241
cats (*kwcoco.CategoryTree property*), 368
cats (*kwcoco.coco_dataset.MixinCocoIndex property*), 284
cats (*kwcoco.coco_sql_dataset.CocoSqlDatabase property*), 347
cats (*kwcoco.CocoSqlDatabase property*), 408
catToImgs (*kwcoco.compat_dataset.COCO property*), 350
channels (*kwcoco.coco_image.CocoImage property*), 305
channels (*kwcoco.coco_sql_dataset.Image attribute*), 337
channels (*kwcoco.CocoImage property*), 392
channels (*kwcoco.util.delayed_ops.DelayedChannelConcat property*), 153
channels (*kwcoco.util.delayed_ops.DelayedImage property*), 163
ChannelSpec (*class in kwcoco*), 369
chans (*kwcoco.SensorChanSpec property*), 418
children() (*kwcoco.util.delayed_ops.DelayedNaryOperation method*), 172
children() (*kwcoco.util.delayed_ops.DelayedOperation method*), 174
children() (*kwcoco.util.delayed_ops.DelayedUnaryOperation method*), 179
cid_to_aids (*kwcoco.coco_dataset.MixinCocoIndex property*), 284
cid_to_gids (*kwcoco.coco_dataset.CocoIndex property*), 282
cid_to_rgb() (*in module kwcoco.data.grab_camvid*), 25
cids (*kwcoco.coco_objects1d.AnnotGroups property*), 332
cids (*kwcoco.coco_objects1d.Annots property*), 329
cids (*kwcoco.coco_objects1d.Categories property*), 326
clamp_mag() (*in module kwcoco.demo.boids*), 30
class_accuracy_from_confusion() (*in module kwcoco.metrics.sklearn_alts*), 119
class_names (*kwcoco.category_tree.CategoryTree property*), 241
class_names (*kwcoco.CategoryTree property*), 368
classes (*kwcoco.metrics.detect_metrics.DetectionMetrics property*), 101
classes (*kwcoco.metrics.DetectionMetrics property*), 133
classification_report() (*in module kwcoco.metrics.clf_report*), 76
classification_report() (*kwcoco.metrics.confusion_vectors.ConfusionVectors method*), 94
classification_report() (*kwcoco.metrics.ConfusionVectors method*), 94

131
clear() (`kwcoco.coco_dataset.CocoIndex` method), 283
clear() (`kwcoco.metrics.detect_metrics.DetectionMetrics` method), 100
clear() (`kwcoco.metrics.DetectionMetrics` method), 132
clear_annotations() (`kwcoco.coco_dataset.MixinCocoAddRemove` method), 277
clear_images() (`kwcoco.coco_dataset.MixinCocoAddRemove` method), 277
CLIConfig (`kwcoco.cli.coco_eval.CocoEvalCLI` attribute), 11
CLIConfig (`kwcoco.cli.coco_reroot.CocoRerootCLI` attribute), 15
CLIConfig (`kwcoco.cli.coco_subset.CocoSubsetCLI` attribute), 19
close() (`kwcoco.util.Archive` method), 217
close() (`kwcoco.util.util_archive.Archive` method), 201
closest_point_on_line_segment() (in module `kwcoco.demo.boids`), 31
cls (in module `kwcoco.coco_sql_dataset`), 339
cnames (`kwcoco.coco_objects1d.AnnotGroups` property), 332
cnames (`kwcoco.coco_objects1d.Annots` property), 329
coarsen() (`kwcoco.metrics.confusion_vectors.ConfusionVectors` method), 93
coarsen() (`kwcoco.metrics.ConfusionVectors` method), 130
COCO (class in `kwcoco.compat_dataset`), 350
coco_image() (`kwcoco.coco_dataset.MixinCocoAccessors` method), 250
coco_images (`kwcoco.coco_objects1d.Images` property), 327
coco_to_kpf() (in module `kwcoco.kpf`), 355
CocoAnnotation (class in `kwcoco.coco_image`), 319
CocoAsset (class in `kwcoco.coco_image`), 318
CocoCategory (class in `kwcoco.coco_image`), 319
CocoConformCLI (class in `kwcoco.cli.coco_conform`), 9
CocoConformCLI.CLIConfig (class in `kwcoco.cli.coco_conform`), 9
CocoDataset (class in `kwcoco`), 378
CocoDataset (class in `kwcoco.coco_dataset`), 284
CocoEvalCLI (class in `kwcoco.cli.coco_eval`), 11
CocoEvalCLIConfig (class in `kwcoco.cli.coco_eval`), 10
CocoEvalConfig (class in `kwcoco.coco_evaluator`), 299
CocoEvaluator (class in `kwcoco.coco_evaluator`), 300
CocoGrabCLI (class in `kwcoco.cli.coco_grab`), 12
CocoGrabCLI.CLIConfig (class in `kwcoco.cli.coco_grab`), 12
CocoImage (class in `kwcoco`), 391
CocoImage (class in `kwcoco.coco_image`), 304
CocoIndex (class in `kwcoco.coco_dataset`), 281
CocoModifyCatsCLI (class in `kwcoco.cli.coco_modify_categories`), 13
CocoModifyCatsCLI.CLIConfig (class in `kwcoco.cli.coco_modify_categories`), 13
CocoMove (class in `kwcoco.cli.coco_move`), 14
CocoRerootCLI (class in `kwcoco.cli.coco_reroot`), 15
CocoRerootCLI.CocoRerootConfig (class in `kwcoco.cli.coco_reroot`), 15
CocoResults (class in `kwcoco.coco_evaluator`), 301
CocoShowCLI (class in `kwcoco.cli.coco_show`), 16
CocoShowCLI.CLIConfig (class in `kwcoco.cli.coco_show`), 16
CocoSingleResult (class in `kwcoco.coco_evaluator`), 302
CocoSplitCLI (class in `kwcoco.cli.coco_split`), 17
CocoSplitCLI.CLIConfig (class in `kwcoco.cli.coco_split`), 17
CocoSqlDatabase (class in `kwcoco`), 404
CocoSqlDatabase (class in `kwcoco.coco_sql_dataset`), 343
CocoSqlIndex (class in `kwcoco.coco_sql_dataset`), 343
CocoStatsCLI (class in `kwcoco.cli.coco_stats`), 18
CocoStatsCLI.CLIConfig (class in `kwcoco.cli.coco_stats`), 18
CocoSubsetCLI (class in `kwcoco.cli.coco_subset`), 19
CocoSubsetCLI.CocoSubsetConfig (class in `kwcoco.cli.coco_subset`), 19
CocoToyDataCLI (class in `kwcoco.cli.coco_toydata`), 21
CocoToyDataCLI.CLIConfig (class in `kwcoco.cli.coco_toydata`), 21
CocoTrack (class in `kwcoco.coco_image`), 319
CocoUnionCLI (class in `kwcoco.cli.coco_union`), 22
CocoUnionCLI.CLIConfig (class in `kwcoco.cli.coco_union`), 22
CocoValidateCLI (class in `kwcoco.cli.coco_validate`), 23
CocoValidateCLI.CLIConfig (class in `kwcoco.cli.coco_validate`), 23
CocoVideo (class in `kwcoco.coco_image`), 318
code_list() (`kwcoco.ChannelSpec` method), 373
code_list() (`kwcoco.FusedChannelSpec` method), 413
coerce() (`kwcoco.category_tree.CategoryTree` class method), 239
coerce() (`kwcoco.CategoryTree` class method), 366
coerce() (`kwcoco.ChannelSpec` class method), 371
coerce() (`kwcoco.coco_dataset.MixinCocoExtras` class method), 251
coerce() (`kwcoco.coco_sql_dataset.CocoSqlDatabase` class method), 344
coerce() (`kwcoco.CocoSqlDatabase` class method), 405
coerce() (`kwcoco.demo.toypatterns.CategoryPatterns` class method), 69
coerce() (`kwcoco.FusedChannelSpec` class method), 411
coerce() (`kwcoco.SensorChanSpec` class method), 416
coerce() (`kwcoco.util.Archive` class method), 217

coerce() (`kwcoco.util.util_archive.Archive` class method), 201
coerce_indent() (in module `kwcoco.util.util_json`), 209
coerce_multiple() (`kw-coco.coco_dataset.CocoDataset` class method), 288
coerce_multiple() (`kwcoco.CocoDataset` class method), 382
coerce_num_workers() (in module `kw-coco.util.util_parallel`), 210
coerce_resolution() (in module `kw-coco.coco_image`), 320
combine() (`kwcoco.metrics.confusion_measures.Measure` class method), 89
combine() (`kwcoco.metrics.confusion_measures.Measures` class method), 81
combine() (`kwcoco.metrics.confusion_measures.OneVersusRestMeasur` class method), 89
combine() (`kwcoco.metrics.Measures` class method), 143
component_indices() (`kwcoco.ChannelSpec` method), 377
component_indices() (`kwcoco.FusedChannelSpec` method), 414
compress() (`kwcoco.coco_objects1d.ObjectList1D` method), 321
compute_forces() (`kwcoco.demo.boids.Boids` method), 30
concat() (`kwcoco.FusedChannelSpec` class method), 411
concise_si_display() (in module `kw-coco.metrics.drawing`), 109
concise() (`kwcoco.ChannelSpec` method), 372
concise() (`kwcoco.FusedChannelSpec` method), 411
concise() (`kwcoco.SensorChanSpec` method), 416
conform() (`kwcoco.coco_dataset.MixinCocoStats` method), 263
confusion_matrix() (in module `kw-coco.metrics.sklearn_alts`), 118
confusion_matrix() (`kw-coco.metrics.confusion_vectors.ConfusionVectors` method), 92
confusion_matrix() (`kw-coco.metrics.ConfusionVectors` method), 129
confusion_vectors() (`kw-coco.metrics.detect_metrics.DetectionMetrics` method), 101
confusion_vectors() (`kw-coco.metrics.DetectionMetrics` method), 133
ConfusionVectors (class in `kwcoco.metrics`), 126
ConfusionVectors (class in `kw-`)
coco.metrics.confusion_vectors), 90
connect() (`kwcoco.coco_sql_dataset.CocoSqlDatabase` method), 344
connect() (`kwcoco.CocoSqlDatabase` method), 405
ContainerElements (class in `kwcoco.util`), 217
ContainerElements (class in `kw-coco.util.jsonschema_elements`), 196
convert_camvid_raw_to_coco() (in module `kw-coco.data.grab_camvid`), 25
convert_spacenet_to_kwccoco() (in module `kw-coco.data.grab_spacenet`), 27
convert_voc_to_coco() (in module `kw-coco.data.grab_voc`), 27
copy() (`kwcoco.CategoryTree` method), 238
copy() (`kwcoco.CocoDataset` method), 366
copy() (`kwcoco.coco_dataset.CocoDataset` method), 299
copy() (`kwcoco.CocoDataset` method), 384
copy() (`kwcoco.util.dict_like.DictLike` method), 189
copy() (`kwcoco.util.DictLike` method), 219
corrupted_images() (`kw-coco.coco_dataset.MixinCocoExtras` method), 257
counts() (`kwcoco.metrics.confusion_measures.Measures` method), 80
counts() (`kwcoco.metrics.Measures` method), 142
createIndex() (`kwcoco.compat_dataset.COCO` method), 350
crop() (`kwcoco.util.delayed_ops.ImageOpsMixin` method), 183

D

data_fpath (`kwcoco.coco_dataset.MixinCocoExtras` property), 260
data_fpath (`kwcoco.coco_sql_dataset.CocoSqlDatabase` property), 349
data_fpath (`kwcoco.CocoSqlDatabase` property), 410
data_root (`kwcoco.coco_dataset.MixinCocoExtras` property), 260
dataset (`kwcoco.coco_sql_dataset.CocoSqlDatabase` property), 347
dataset (`kwcoco.CocoSqlDatabase` property), 408
datetime (`kwcoco.coco_image.CocoImage` property), 305
datetime (`kwcoco.CocoImage` property), 392
decode() (`kwcoco.ChannelSpec` method), 377
default (`kwcoco.cli.coco_conform.CocoConformCLI`.`CLICConfig` attribute), 10
default (`kwcoco.cli.coco_eval.CocoEvalCLI`.`CLICConfig` attribute), 11
default (`kwcoco.cli.coco_grab.CocoGrabCLI`.`CLICConfig` attribute), 13

```

default (kwCOCO.cli.coco_modify_categories.CocoModifyCLIConfig.delete() (kwCOCO.coco_sql_dataset.CocoSqlDatabase
attribute), 14
default (kwCOCO.cli.coco_move.CocoMove attribute), 15 delete() (kwCOCO.CocoSqlDatabase method), 406
default (kwCOCO.cli.coco_reroot.CocoRerootCLI.CocoRerootConfig.delete() (kwCOCO.util.dict_like.DictLike method), 189
attribute), 15 delitem() (kwCOCO.util.DictLike method), 219
default (kwCOCO.cli.coco_show.CocoShowCLI.CLICConfig demo() (in module kwCOCO.coco_sql_dataset), 349
attribute), 16 demo() (in module kwCOCO.kpf), 355
default (kwCOCO.cli.coco_split.CocoSplitCLI.CLICConfig demo() (kwCOCO.category_tree.CategoryTree class
attribute), 18 method), 239
default (kwCOCO.cli.coco_stats.CocoStatsCLI.CLICConfig demo() (kwCOCO.CategoryTree class method), 367
attribute), 18 demo() (kwCOCO.coco_dataset.MixinCocoExtras class
default (kwCOCO.cli.coco_subset.CocoSubsetCLI.CocoSubsetConfig method), 251
attribute), 19 demo() (kwCOCO.kw18.KW18 class method), 356
default (kwCOCO.cli.coco_toydata.CocoToyDataCLI.CLICConfig demo() (kwCOCO.metrics.BinaryConfusionVectors class
attribute), 22 method), 123
default (kwCOCO.cli.coco_union.CocoUnionCLI.CLICConfig demo() (kwCOCO.metrics.confusion_measures.Measures
attribute), 22 class method), 81
default (kwCOCO.cli.coco_validate.CocoValidateCLI.CLICConfig demo() (kwCOCO.metrics.confusion_vectors.BinaryConfusionVectors
attribute), 23 class method), 96
default (kwCOCO.coco_evaluator.CocoEvalConfig demo() (kwCOCO.metrics.confusion_vectors.ConfusionVectors
attribute), 300 class method), 92
DEFAULT_COLUMNS (kwCOCO.kw18.KW18 attribute), 356 demo() (kwCOCO.metrics.confusion_vectors.OneVsRestConfusionVectors
delay() (kwCOCO.coco_image.CocoImage method), 316 class method), 95
delay() (kwCOCO.CocoImage method), 402 demo() (kwCOCO.metrics.ConfusionVectors class
delayed_load() (kwCOCO.coco_dataset.MixinCocoAccessors method), 128
method), 243 demo() (kwCOCO.metrics.detect_metrics.DetectionMetrics
DelayedArray (class in kwCOCO.util.delayed_ops), 151 class method), 104
DelayedAsXarray (class in kwCOCO.util.delayed_ops), demo() (kwCOCO.metrics.DetectionMetrics class method),
151 136
DelayedChannelConcat (class in kwCOCO.util.delayed_ops), 152 demo() (kwCOCO.metrics.Measures class method), 143
DelayedConcat (class in kwCOCO.util.delayed_ops), 157 demo() (kwCOCO.metrics.OneVsRestConfusionVectors
DelayedCrop (class in kwCOCO.util.delayed_ops), 157 class method), 148
DelayedDequantize (class in kwCOCO.util.delayed_ops), demo() (kwCOCO.util.delayed_ops.DelayedLoad class
161 method), 170
DelayedFrameStack (class in kwCOCO.util.delayed_ops), demo_coco_data() (in module kwCOCO.coco_dataset),
162 297
DelayedIdentity (class in kwCOCO.util.delayed_ops), demo_format_options() (in module kw-
162 coco.metrics.drawing), 109
DelayedImage (class in kwCOCO.util.delayed_ops), 163 demodata_toy_dset() (in module kw-
DelayedImageLeaf (class in kwCOCO.util.delayed_ops), 167 coco.demo.toydata), 34
167 demodata_toy_dset() (in module kw-
DelayedLoad (class in kwCOCO.util.delayed_ops), 167 coco.demo.toydata_image), 47
DelayedNans (class in kwCOCO.util.delayed_ops), 171 demodata_toy_img() (in module kw-
DelayedNaryOperation (class in kwCOCO.util.delayed_ops), 172 coco.demo.toydata), 44
172 demodata_toy_img() (in module kw-
DelayedOperation (class in kwCOCO.util.delayed_ops), 172 coco.demo.toydata_image), 49
172 DelayedOverview (class in kwCOCO.util.delayed_ops), deprecate() (in module kwCOCO.coco_schema), 334
175 deprecate_function_alias() (in module kw-
DelayedStack (class in kwCOCO.util.delayed_ops), 179 coco.util.util_deprecate), 202
DelayedUnaryOperation (class in kw-
coco.util.delayed_ops), 179 dequantize() (kwCOCO.util.delayed_ops.ImageOpsMixin
method), 187
DelayedWarp (class in kwCOCO.util.delayed_ops), 179 detach() (kwCOCO.coco_image._CocoObject method),
304 detach() (kwCOCO.coco_image.CocoImage method), 305

```

detach() (`kwCOCO.CocoImage` method), 391
DetectionMetrics (class in `kwCOCO.metrics`), 131
DetectionMetrics (class in `kwCOCO.metrics.detect_metrics`), 99
detections (`kwCOCO.coco_objects1d.Annots` property), 329
deterministic_colors() (in module `kwCOCO.metrics.drawing`), 116
devcheck() (in module `kwCOCO.coco_sql_dataset`), 350
developing() (`kwCOCO.util.util_monkey.Reloadable` class method), 210
dict_restructure() (in module `kwCOCO.coco_sql_dataset`), 339
DictInterface (class in `kwCOCO.util.dict_proxy2`), 190
DictLike (class in `kwCOCO.util`), 218
DictLike (class in `kwCOCO.util.dict_like`), 189
DictProxy (class in `kwCOCO.util.dict_like`), 190
DictProxy2 (class in `kwCOCO.util.dict_proxy2`), 191
difference() (`kwCOCO.ChannelSpec` method), 373
difference() (`kwCOCO.FusedChannelSpec` method), 413
disconnect() (`kwCOCO.coco_sql_dataset.CocoSqlDatabase` method), 344
disconnect() (`kwCOCO.CocoSqlDatabase` method), 405
dmet_area_weights() (in module `kwCOCO.coco_evaluator`), 301
download() (`kwCOCO.compat_dataset.COCO` method), 353
draw() (`kwCOCO.coco_image.CocoImage` method), 317
draw() (`kwCOCO.CocoImage` method), 403
draw() (`kwCOCO.metrics.confusion_measures.Measures` method), 80
draw() (`kwCOCO.metrics.confusion_measures.PerClass_Measures` method), 86
draw() (`kwCOCO.metrics.Measures` method), 142
draw() (`kwCOCO.metrics.PerClass_Measures` method), 148
draw_distribution() (kwCOCO.
coco.metrics.BinaryConfusionVectors method), 125
draw_distribution() (kwCOCO.
coco.metrics.confusion_vectors.BinaryConfusionVectors method), 98
draw_image() (`kwCOCO.coco_dataset.MixinCocoDraw` method), 267
draw_perclass_prcurve() (in module `kwCOCO.metrics.drawing`), 111
draw_perclass_roc() (in module `kwCOCO.metrics.drawing`), 109
draw_perclass_thresholds() (in module `kwCOCO.metrics.drawing`), 112
draw_pr() (`kwCOCO.metrics.confusion_measures.PerClass_Measures` method), 86
draw_pr() (`kwCOCO.metrics.PerClass_Measures` method), 149
draw_prcurve() (in module `kwCOCO.metrics.drawing`), 114
draw_roc() (in module `kwCOCO.metrics.drawing`), 113
draw_roc() (`kwCOCO.metrics.confusion_measures.PerClass_Measures` method), 86
draw_roc() (`kwCOCO.metrics.PerClass_Measures` method), 149
draw_threshold_curves() (in module `kwCOCO.metrics.drawing`), 115
dsizes (`kwCOCO.coco_image.CocoImage` property), 305
dsizes (`kwCOCO.CocoImage` property), 392
dsizes (`kwCOCO.util.DelayedOps.DelayedImage` property), 163
dump() (`kwCOCO.coco_dataset.CocoDataset` method), 291
dump() (`kwCOCO.coco_evaluator.CocoResults` method), 302
dump() (`kwCOCO.coco_evaluator.CocoSingleResult` method), 303
dump() (`kwCOCO.CocoDataset` method), 385
dump() (`kwCOCO.kw18.KW18` method), 357
dump_figures() (`kwCOCO.coco_evaluator.CocoResults` method), 302
dump_figures() (`kwCOCO.coco_evaluator.CocoSingleResult` method), 303
dumps() (`kwCOCO.coco_dataset.CocoDataset` method), 290
dumps() (`kwCOCO.CocoDataset` method), 384
dumps() (`kwCOCO.kw18.KW18` method), 357
DuplicateAddError, 354

E

eff() (`kwCOCO.demo.toypatterns.Rasters` static method), 71
Element (class in `kwCOCO.util`), 220
Element (class in `kwCOCO.util.jsonschema_elements`), 194
encode() (`kwCOCO.ChannelSpec` method), 375
enrich_confusion_vectors() (kwCOCO.
coco.metrics.detect_metrics.DetectionMetrics
method), 100
enrich_confusion_vectors() (kwCOCO.
coco.metrics.DetectionMetrics
method), 132
ensure_category() (kwCOCO.
coco.coco_dataset.MixinCocoAddRemove
method), 276
ensure_image() (kwCOCO.coco_dataset.MixinCocoAddRemove
method), 275
ensure_json_serializable() (in module `kwCOCO.coco.util`), 230
ensure_json_serializable() (in module `kwCOCO.util.util_json`), 207

ensure_sql_coco_view() (in module `coco.coco_sql_dataset`), 349
 ensure_voc_coco() (in module `coco.data.grab_voc`), 28
 ensure_voc_data() (in module `coco.data.grab_voc`), 27
`epilog`(`kwcoco.cli.coco_conform.CocoConformCLI.CLICConfig` attribute), 10
`epilog`(`kwcoco.cli.coco_modify_categories.CocoModifyCatsCLI.CLICConfig` attribute), 13
`epilog`(`kwcoco.cli.coco_toydata.CocoToyDataCLI.CLICConfig` attribute), 21
`eval_detections_cli()` (in module `kwcoco.metrics`), 150
`eval_detections_cli()` (in module `coco.metrics.detect_metrics`), 109
`evaluate()` (`kwcoco.coco_evaluator.CocoEvaluator` method), 301
`evaluate()` (`kwcoco.util.delayed_ops.DelayedImage` method), 165
`Executor` (class in `kwcoco.util.util_futures`), 203
`extended_stats()` (`kwcoco.coco_dataset.MixinCocoStats` method), 266
`extractall()` (`kwcoco.util.Archive` method), 217
`extractall()` (`kwcoco.util.util_archive.Archive` method), 201

F

`FallbackCocoBase` (class in `kwcoco.coco_sql_dataset`), 335
`false_color()` (in module `coco.demo.toydata_video`), 65
`fast_confusion_matrix()` (in module `coco.metrics.functional`), 117
`file_name` (`kwcoco.coco_sql_dataset.Image` attribute), 337
`finalize()` (`kwcoco.metrics.confusion_measures.Measure` method), 89
`finalize()` (`kwcoco.metrics.confusion_measures.OneVersusAllMeasure` method), 89
`finalize()` (`kwcoco.util.delayed_ops.DelayedOperation` method), 174
`find_asset()` (`kwcoco.coco_image.CocoImage` method), 308
`find_asset()` (`kwcoco.CocoImage` method), 394
`find_asset_obj()` (`kwcoco.coco_image.CocoImage` method), 308
`find_asset_obj()` (`kwcoco.CocoImage` method), 395
`find_json_unserializable()` (in module `coco.util`), 231
`find_json_unserializable()` (in module `coco.util.util_json`), 207

`findRepresentativeImages()` (`kwcoco.coco_dataset.MixinCocoStats` method), 267
`find_reroot_ autofix()` (in module `coco.cli.coco_reroot`), 16
`fix_msys_path()` (in module `coco.util.util_windows`), 214
`forest_str()` (`kwcoco.category_tree.CategoryTree` class method), 241
`forest_str()` (`kwcoco.CategoryTree` method), 369
`fpAth` (`kwcoco.coco_dataset.CocoDataset` property), 287
`fpAth` (`kwcoco.coco_sql_dataset.CocoSqlDatabase` property), 345
`fpAth` (`kwcoco.CocoDataset` property), 381
`fpAth` (`kwcoco.CocoSqlDatabase` property), 406
`fpAth` (`kwcoco.util.delayed_ops.DelayedLoad` property), 170
`frame_index` (`kwcoco.coco_sql_dataset.Image` attribute), 337
`from_arrays()` (`kwcoco.metrics.confusion_vectors.ConfusionVectors` class method), 92
`from_arrays()` (`kwcoco.metrics.ConfusionVectors` class method), 128
`from_coco()` (`kwcoco.category_tree.CategoryTree` class method), 238
`from_coco()` (`kwcoco.CategoryTree` class method), 366
`from_coco()` (`kwcoco.kw18.KW18` class method), 356
`from_coco()` (`kwcoco.metrics.detect_metrics.DetectionMetrics` class method), 100
`from_coco()` (`kwcoco.metrics.DetectionMetrics` class method), 132
`from_coco_paths()` (`kwcoco.coco_dataset.CocoDataset` class method), 290
`from_coco_paths()` (`kwcoco.CocoDataset` class method), 384
`from_data()` (`kwcoco.coco_dataset.CocoDataset` class method), 287
`from_data()` (`kwcoco.CocoDataset` class method), 381
`from_gid()` (`kwcoco.coco_image.CocoImage` class method), 305
`from_gid()` (`kwcoco.CocoImage` class method), 391
`from_image_paths()` (`kwcoco.coco_dataset.CocoDataset` class method), 287
`from_image_paths()` (`kwcoco.CocoDataset` class method), 381
`from_json()` (`kwcoco.category_tree.CategoryTree` class method), 238
`from_json()` (`kwcoco.CategoryTree` class method), 366
`from_json()` (`kwcoco.coco_evaluator.CocoResults` class method), 302
`from_json()` (`kwcoco.coco_evaluator.CocoSingleResult` class method), 303

```
from_json() (kwCOCO.metrics.confusion_measures.Measures.getImgIds() (kwCOCO.compat_dataset.COCO method),
    class method), 80
352
from_json() (kwCOCO.metrics.confusion_measures.PerClass_Measures.getImgIds(kwCOCO.util.dict_like.DictLike method), 189
    class method), 86
getitem() (kwCOCO.util.DictLike method), 219
from_json() (kwCOCO.metrics.confusion_vectors.ConfusionVectors.getImgIds_aids (kwCOCO.coco_dataset.MixinCocoIndex
    class method), 91
property), 284
from_json() (kwCOCO.metrics.ConfusionVectors class
method), 128
gids (kwCOCO.coco_objectsId.Annots property), 329
from_json() (kwCOCO.metrics.Measures class
method), 141
gids (kwCOCO.coco_objectsId.Images property), 327
from_mutex() (kwCOCO.category_tree.CategoryTree
class method), 238
global_accuracy_from_confusion() (in module kw-
coco.metrics.sklearn_alts), 119
gname (kwCOCO.coco_objectsId.Images property), 327
from_mutex() (kwCOCO.CategoryTree class
method), 366
gpath (kwCOCO.coco_objectsId.Images property), 327
grab_camvid_sampler() (in module kw-
coco.data.grab_camvid), 24
fuse() (kwCOCO.ChannelSpec method), 372
grab_camvid_train_val_splits() (in module kw-
coco.data.grab_camvid), 24
fuse() (kwCOCO.FusedChannelSpec method), 414
grab_coco_camvid() (in module kw-
FusedChannelSpec (class in kwCOCO), 410
coco.data.grab_camvid), 24
get() (kwCOCO._helpers._NextId method), 234
grab_domain_net() (in module kw-
get() (kwCOCO.coco_image.CocoImage method), 305
coco.data.grab_domainnet), 26
get() (kwCOCO.coco_objectsId.ObjectList1D
method), 322
grab_raw_camvid() (in module kw-
322
get() (kwCOCO.CocoImage method), 392
coco.data.grab_rawcamvid), 25
get() (kwCOCO.demo.toypatterns.CategoryPatterns
method), 70
grab_spacenet7() (in module kw-
get() (kwCOCO.util.dict_like.DictLike method), 190
coco.data.grab_spacenet), 26
get() (kwCOCO.util.dict_proxy2.DictInterface
method), 191
height (kwCOCO.coco_objectsId.Images property), 327
get() (kwCOCO.util.DictLike method), 220
height (kwCOCO.coco_sql_dataset.Image attribute), 337
get_auxiliary_fpath() (kw-
height (kwCOCO.coco_sql_dataset.Video attribute), 337
coco.coco_dataset.MixinCocoAccessors
method), 245
id (kwCOCO.coco_sql_dataset.Annotation attribute), 338
get_image_fpath() (kw-
id (kwCOCO.coco_sql_dataset.Category attribute), 335
coco.coco_dataset.MixinCocoAccessors
method), 245
id (kwCOCO.coco_sql_dataset.Image attribute), 337
get_overview() (kwCOCO.util.delayed_ops.ImageOpsMixin
method), 188
id (kwCOCO.coco_sql_dataset.KeypointCategory attribute), 337
get_transform_from() (kw-
id (kwCOCO.coco_sql_dataset.Track attribute), 338
coco.util.delayed_ops.ImageOpsMixin
method), 188
id (kwCOCO.coco_sql_dataset.Video attribute), 337
get_transform_from_leaf() (kw-
id_to_idx (kwCOCO.category_tree.CategoryTree prop-
coco.util.delayed_ops.DelayedImage method), 164
erty), 240
id_to_idx (kwCOCO.CategoryTree property), 367
getAnnIds() (kwCOCO.compat_dataset.COCO method),
351
ids (kwCOCO.coco_objectsId.ObjectList1D property),
321
getCatIds() (kwCOCO.compat_dataset.COCO method),
351
idx_pairwise_distance() (kw-
coco.category_tree.CategoryTree method), 240
idx_pairwise_distance() (kwCOCO.CategoryTree
method), 368
idx_to_ancestor_idxs() (kw-
coco.category_tree.CategoryTree method), 240
idx_to_ancestor_idxs() (kwCOCO.CategoryTree
method), 368
```

`idx_to_descendants_idxs()` (*kw-
coco.category_tree.CategoryTree method*), 240

`idx_to_descendants_idxs()` (*kwcoco.CategoryTree method*), 368

`idx_to_id` (*kwcoco.category_tree.CategoryTree property*), 240

`idx_to_id` (*kwcoco.CategoryTree property*), 367

`Image` (*class in kwcoco.coco_sql_dataset*), 337

`image_filepath()` (*kwcoco.coco_image.CocoAsset method*), 318

`image_id` (*kwcoco.coco_objects1d.Annots property*), 329

`image_id` (*kwcoco.coco_sql_dataset.Annotation attribute*), 338

`ImageGroups` (*class in kwcoco.coco_objects1d*), 332

`ImageOpsMixin` (*class in kwcoco.util.delayed_ops*), 183

`Images` (*class in kwcoco.coco_objects1d*), 326

`images` (*kwcoco.coco_objects1d.Annots property*), 329

`images` (*kwcoco.coco_objects1d.Videos property*), 326

`images()` (*kwcoco.coco_dataset.MixinCocoObjects method*), 260

`imdelay()` (*kwcoco.coco_image.CocoImage method*), 310

`imdelay()` (*kwcoco.CocoImage method*), 397

`img_root` (*kwcoco.coco_dataset.MixinCocoExtras property*), 260

`imgs` (*kwcoco.coco_dataset.MixinCocoIndex property*), 284

`imgs` (*kwcoco.coco_sql_dataset.CocoSqlDatabase property*), 347

`imgs` (*kwcoco.CocoSqlDatabase property*), 408

`imgToAnns` (*kwcoco.compat_dataset.COCO property*), 350

`imread()` (*kwcoco.coco_dataset.MixinCocoDeprecate method*), 243

`index()` (*kwcoco.category_tree.CategoryTree method*), 241

`index()` (*kwcoco.CategoryTree method*), 369

`index()` (*kwcoco.demo.toypatterns.CategoryPatterns method*), 70

`indexable_allclose()` (*in module kwcoco.util*), 232

`indexable_allclose()` (*in module kw-
coco.util.util_json*), 208

`IndexableWalker` (*class in kwcoco.util*), 221

`info` (*kwcoco.ChannelSpec property*), 371

`info()` (*kwcoco.compat_dataset.COCO method*), 350

`initialize()` (*kwcoco.demo.boids.Boids method*), 30

`INTEGER` (*kwcoco.util.jsonschema_elements.ScalarElements property*), 196

`INTEGER` (*kwcoco.util.ScalarElements property*), 228

`intersection()` (*kwcoco.ChannelSpec method*), 374

`intersection()` (*kwcoco.FusedChannelSpec method*), 414

`InvalidAddError`, 354

`is_mutex()` (*kwcoco.category_tree.CategoryTree method*), 240

`is_mutex()` (*kwcoco.CategoryTree method*), 368

`is_windows_path()` (*in module kw-
coco.util.util_windows*), 215

`iscrowd` (*kwcoco.coco_sql_dataset.Annotation attribute*), 339

`issubset()` (*kwcoco.ChannelSpec method*), 374

`issubset()` (*kwcoco.FusedChannelSpec method*), 414

`issuperset()` (*kwcoco.ChannelSpec method*), 374

`issuperset()` (*kwcoco.FusedChannelSpec method*), 414

`items()` (*kwcoco.ChannelSpec method*), 372

`items()` (*kwcoco.coco_sql_dataset.SqlDictProxy method*), 341

`items()` (*kwcoco.coco_sql_dataset.SqlIdGroupDictProxy method*), 343

`items()` (*kwcoco.util.dict_like.DictLike method*), 189

`items()` (*kwcoco.util.dict_proxy2.DictInterface method*), 191

`items()` (*kwcoco.util.DictLike method*), 219

`iter_asset_objs()` (*kwcoco.coco_image.CocoImage method*), 307

`iter_asset_objs()` (*kwcoco.CocoImage method*), 394

`iter_assets()` (*kwcoco.coco_image.CocoImage method*), 307

`iter_assets()` (*kwcoco.CocoImage method*), 394

`iter_image_filepaths()` (*kw-
coco.coco_image.CocoImage method*), 307

`iter_image_filepaths()` (*kwcoco.CocoImage method*), 394

J

`JobPool` (*class in kwcoco.util.util_futures*), 204

`join()` (*kwcoco.util.util_futures.JobPool method*), 206

K

`keypoint_annotation_frequency()` (*kw-
coco.coco_dataset.MixinCocoDeprecate method*), 243

`keypoint_categories()` (*kw-
coco.coco_dataset.MixinCocoAccessors method*), 250

`KeypointCategory` (*class in kwcoco.coco_sql_dataset*), 336

`keypoints` (*kwcoco.coco_sql_dataset.Annotation attribute*), 338

`keys()` (*kwcoco.ChannelSpec method*), 372

`keys()` (*kwcoco.coco_image.CocoImage method*), 305

`keys()` (*kwcoco.coco_sql_dataset.SqlDictProxy method*), 341

`keys()` (*kwcoco.coco_sql_dataset.SqlIdGroupDictProxy method*), 343

```
keys() (kwcoco.CocoImage method), 392
keys() (kwcoco.metrics.confusion_vectors.OneVsRestConfusionVectors
       method), 95
keys() (kwcoco.metrics.OneVsRestConfusionVectors
       method), 148
keys() (kwcoco.util.dict_like.DictLike method), 189
keys() (kwcoco.util.dict_like.DictProxy method), 190
keys() (kwcoco.util.dict_proxy2.AliasedDictProxy
       method), 193
keys() (kwcoco.util.dict_proxy2.DictInterface method),
       191
keys() (kwcoco.util.dict_proxy2.DictProxy2 method),
       191
keys() (kwcoco.util.DictLike method), 219
KW18 (class in kwcoco.kw18), 355
kwcoco
    module, 358
kwcoco.__init__
    module, 1
kwcoco.__main__
    module, 234
kwcoco._helpers
    module, 234
kwcoco.abstract_coco_dataset
    module, 236
kwcoco.category_tree
    module, 237
kwcoco.channel_spec
    module, 242
kwcoco.cli
    module, 24
kwcoco.cli.__main__
    module, 9
kwcoco.cli.coco_conform
    module, 9
kwcoco.cli.coco_eval
    module, 10
kwcoco.cli.coco_grab
    module, 12
kwcoco.cli.coco_modify_categories
    module, 13
kwcoco.cli.coco_move
    module, 14
kwcoco.cli.coco_reroot
    module, 15
kwcoco.cli.coco_show
    module, 16
kwcoco.cli.coco_split
    module, 17
kwcoco.cli.coco_stats
    module, 18
kwcoco.cli.coco_subset
    module, 19
kwcoco.cli.coco_toydata
    module, 21
kwcoco.kw18.coco_union
    module, 22
kwcoco.cli.coco_validate
    module, 23
kwcoco.coco_dataset
    module, 242
kwcoco.coco_evaluator
    module, 298
kwcoco.coco_image
    module, 304
kwcoco.coco_objects1d
    module, 320
kwcoco.coco_schema
    module, 333
kwcoco.coco_sql_dataset
    module, 334
kwcoco.compat_dataset
    module, 350
kwcoco.data
    module, 28
kwcoco.data.grab_camvid
    module, 24
kwcoco.data.grab_datasets
    module, 26
kwcoco.data.grab_domainnet
    module, 26
kwcoco.data.grab_spacenet
    module, 26
kwcoco.data.grab_voc
    module, 27
kwcoco.demo
    module, 72
kwcoco.demo.boids
    module, 28
kwcoco.demo.perterb
    module, 32
kwcoco.demo.toydata
    module, 34
kwcoco.demo.toydata_image
    module, 47
kwcoco.demo.toydata_video
    module, 53
kwcoco.demo.toypatterns
    module, 68
kwcoco.exceptions
    module, 354
kwcoco.kpf
    module, 355
kwcoco.kw18
    module, 355
kwcoco.metrics
    module, 123
kwcoco.metrics.assignment
```

```

    module, 72
kwcoco.metrics.clf_report
    module, 76
kwcoco.metrics.confusion_measures
    module, 79
kwcoco.metrics.confusion_vectors
    module, 90
kwcoco.metrics.detect_metrics
    module, 99
kwcoco.metrics.drawing
    module, 109
kwcoco.metrics.functional
    module, 117
kwcoco.metrics.sklearn_alts
    module, 118
kwcoco.metrics.voc_metrics
    module, 120
kwcoco.sensorchan_spec
    module, 358
kwcoco.util
    module, 215
kwcoco.util.delayed_ops
    module, 151
kwcoco.util.dict_like
    module, 189
kwcoco.util.dict_proxy2
    module, 190
kwcoco.util.jsonschema_elements
    module, 194
kwcoco.util.lazy_frame_backends
    module, 200
kwcoco.util.util_archive
    module, 200
kwcoco.util.util_deprecate
    module, 202
kwcoco.util.util_eval
    module, 202
kwcoco.util.util_futures
    module, 203
kwcoco.util.util_json
    module, 207
kwcoco.util.util_monkey
    module, 209
kwcoco.util.util_parallel
    module, 210
kwcoco.util.util_reroot
    module, 211
kwcoco.util.util_sklearn
    module, 212
kwcoco.util.util_special_json
    module, 213
kwcoco.util.util_truncate
    module, 214
kwcoco.util.util_windows
    module, 214

L
late_fuse() (kwcoco.SensorChanSpec method), 417
leafs() (kwcoco.util.delayed_ops.DelayedOperation
method), 173
load() (kwcoco.kw18.KW18 class method), 357
load_annot_sample() (kw-
    coco.coco_dataset.MixinCocoAccessors
method), 246
load_image() (kwcoco.coco_dataset.MixinCocoAccessors
method), 245
load_multiple() (kwcoco.coco_dataset.CocoDataset
class method), 289
load_multiple() (kwcoco.CocoDataset class method),
    383
loadAnns() (kwcoco.compat_dataset.COCO method),
    352
loadCats() (kwcoco.compat_dataset.COCO method),
    352
loadImgs() (kwcoco.compat_dataset.COCO method),
    352
loadNumpyAnnotations() (kw-
    coco.compat_dataset.COCO method), 353
loadRes() (kwcoco.compat_dataset.COCO method),
    353
loads() (kwcoco.kw18.KW18 class method), 357
log() (kwcoco.coco_evaluator.CocoEvaluator method),
    300
lookup() (kwcoco.coco_objects1d.ObjectGroups
method), 325
lookup() (kwcoco.coco_objects1d.ObjectList1D
method), 322

M
main() (in module kwcoco.cli.__main__), 9
main() (in module kwcoco.cli.coco_eval), 11
main() (in module kwcoco.cli.coco_stats), 19
main() (in module kwcoco.data.grab_camvid), 25
main() (in module kwcoco.data.grab_spacenet), 27
main() (in module kwcoco.data.grab_voc), 28
main() (kwcoco.cli.coco_conform.CocoConformCLI
class method), 10
main() (kwcoco.cli.coco_eval.CocoEvalCLI class
method), 11
main() (kwcoco.cli.coco_grab.CocoGrabCLI class
method), 13
main() (kwcoco.cli.coco_modify_categories.CocoModifyCatsCLI
class method), 14
main() (kwcoco.cli.coco_move.CocoMove class
method), 14
main() (kwcoco.cli.coco_reroot.CocoRerootCLI class
method), 15

```

main() (`kwCOCO.cli.coco_show.CocoShowCLI` class method), 16
main() (`kwCOCO.cli.coco_split.CocoSplitCLI` class method), 18
main() (`kwCOCO.cli.coco_stats.CocoStatsCLI` class method), 18
main() (`kwCOCO.cli.coco_subset.CocoSubsetCLI` class method), 19
main() (`kwCOCO.cli.coco_toydata.CocoToyDataCLI` class method), 22
main() (`kwCOCO.cli.coco_union.CocoUnionCLI` class method), 22
main() (`kwCOCO.cli.coco_validate.CocoValidateCLI` class method), 23
map() (`kwCOCO.util.util_futures.Executor` method), 204
matching_sensor() (`kwCOCO.SensorChanSpec` method), 418
maximized_thresholds() (`kwCOCO.metrics.confusion_measures.Measures` method), 80
maximized_thresholds() (`kwCOCO.metrics.Measures` method), 142
MeasureCombiner (class in `kwCOCO.metrics.confusion_measures`), 88
Measures (class in `kwCOCO.metrics`), 140
Measures (class in `kwCOCO.metrics.confusion_measures`), 79
measures() (`kwCOCO.metrics.BinaryConfusionVectors` method), 124
measures() (`kwCOCO.metrics.confusion_vectors.BinaryConfusionVectors` method), 97
measures() (`kwCOCO.metrics.confusion_vectors.OneVsRestConfusionVectors` method), 95
measures() (`kwCOCO.metrics.OneVsRestConfusionVectors` method), 148
MEMORY_URI (`kwCOCO.coco_sql_dataset.CocoSqlDatabase` attribute), 344
MEMORY_URI (`kwCOCO.CocoSqlDatabase` attribute), 405
missing_images() (`kwCOCO.coco_dataset.MixinCocoExtras` method), 256
MixinCocoAccessors (class in `kwCOCO.coco_dataset`), 243
MixinCocoAddRemove (class in `kwCOCO.coco_dataset`), 269
MixinCocoDeprecate (class in `kwCOCO.coco_dataset`), 243
MixinCocoDraw (class in `kwCOCO.coco_dataset`), 267
MixinCocoExtras (class in `kwCOCO.coco_dataset`), 250
MixinCocoIndex (class in `kwCOCO.coco_dataset`), 284
MixinCocoObjects (class in `kwCOCO.coco_dataset`), 260
MixinCocoStats (class in `kwCOCO.coco_dataset`), 263
module
 kwCOCO, 358
kwCOCO.__init__, 1
kwCOCO.__main__, 234
kwCOCO._helpers, 234
kwCOCO.abstract_coco_dataset, 236
kwCOCO.category_tree, 237
kwCOCO.channel_spec, 242
kwCOCO.cli, 24
kwCOCO.cli.__main__, 9
kwCOCO.cli.coco_conform, 9
kwCOCO.cli.coco_eval, 10
kwCOCO.cli.coco_grab, 12
kwCOCO.cli.coco_modify_categories, 13
kwCOCO.cli.coco_move, 14
kwCOCO.cli.coco_reroot, 15
kwCOCO.cli.coco_show, 16
kwCOCO.cli.coco_split, 17
kwCOCO.cli.coco_stats, 18
kwCOCO.cli.coco_subset, 19
kwCOCO.cli.coco_toydata, 21
kwCOCO.cli.coco_union, 22
kwCOCO.cli.coco_validate, 23
kwCOCO.coco_dataset, 242
kwCOCO.coco_evaluator, 298
kwCOCO.coco_image, 304
kwCOCO.coco_objects1d, 320
kwCOCO.coco_schema, 333
kwCOCO.coco_sql_dataset, 334
kwCOCO.compat_dataset, 350
kwCOCO.data, 28
 kVecVecs data.grab_camvid, 24
 kVecVecs data.grab_datasets, 26
 kVecVecs data.grab_domainnet, 26
 kVecVecs data.grab_spacenet, 26
 kVecVecs data.grab_voc, 27
kwCOCO.demo, 72
kwCOCO.demo.boids, 28
kwCOCO.demo.perterb, 32
kwCOCO.demo.toydata, 34
kwCOCO.demo.toydata_image, 47
kwCOCO.demo.toydata_video, 53
kwCOCO.demo.toypatterns, 68
kwCOCO.exceptions, 354
kwCOCO.kpf, 355
kwCOCO.kw18, 355
kwCOCO.metrics, 123
kwCOCO.metrics.assignment, 72
kwCOCO.metrics.clf_report, 76
kwCOCO.metrics.confusion_measures, 79
kwCOCO.metrics.confusion_vectors, 90
kwCOCO.metrics.detect_metrics, 99
kwCOCO.metrics.drawing, 109
kwCOCO.metrics.functional, 117
kwCOCO.metrics.sklearn_alts, 118
kwCOCO.metrics.voc_metrics, 120

kwcoco.sensorchan_spec, 358
 kwcoco.util, 215
 kwcoco.util.delayed_ops, 151
 kwcoco.util.dict_like, 189
 kwcoco.util.dict_proxy2, 190
 kwcoco.util.jsonschema_elements, 194
 kwcoco.util.lazy_frame_backends, 200
 kwcoco.util.util_archive, 200
 kwcoco.util.util_deprecate, 202
 kwcoco.util.util_eval, 202
 kwcoco.util.util_futures, 203
 kwcoco.util.util_json, 207
 kwcoco.util.util_monkey, 209
 kwcoco.util.util_parallel, 210
 kwcoco.util.util_reroot, 211
 kwcoco.util.util_sklearn, 212
 kwcoco.util.util_special_json, 213
 kwcoco.util.util_truncate, 214
 kwcoco.util.util_windows, 214

N

n_annot (kwcoco.coco_dataset.MixinCocoStats property), 263
 n_annot (kwcoco.coco_objects1d.Images property), 328
 n_cats (kwcoco.coco_dataset.MixinCocoStats property), 263
 n_images (kwcoco.coco_dataset.MixinCocoStats property), 263
 n_tracks (kwcoco.coco_dataset.MixinCocoStats property), 263
 n_videos (kwcoco.coco_dataset.MixinCocoStats property), 263
 name (kwcoco.cli.coco_conform.CocoConformCLI attribute), 9
 name (kwcoco.cli.coco_eval.CocoEvalCLI attribute), 11
 name (kwcoco.cli.coco_grab.CocoGrabCLI attribute), 12
 name (kwcoco.cli.coco_modify_categories.CocoModifyCategories attribute), 13
 name (kwcoco.cli.coco_reroot.CocoRerootCLI attribute), 15
 name (kwcoco.cli.coco_show.CocoShowCLI attribute), 16
 name (kwcoco.cli.coco_split.CocoSplitCLI attribute), 17
 name (kwcoco.cli.coco_stats.CocoStatsCLI attribute), 18
 name (kwcoco.cli.coco_subset.CocoSubsetCLI attribute), 19
 name (kwcoco.cli.coco_toydata.CocoToyDataCLI attribute), 21
 name (kwcoco.cli.coco_union.CocoUnionCLI attribute), 22
 name (kwcoco.cli.coco_validate.CocoValidateCLI attribute), 23
 name (kwcoco.coco_image.CocoImage property), 305
 name (kwcoco.coco_objects1d.Categories property), 326
 name (kwcoco.coco_objects1d.Tracks property), 331
 name (kwcoco.coco_sql_dataset.Category attribute), 335
 name (kwcoco.coco_sql_dataset.Image attribute), 337
 name (kwcoco.coco_sql_dataset.KeypointCategory attribute), 336
 name (kwcoco.coco_sql_dataset.Track attribute), 338
 name (kwcoco.coco_sql_dataset.Video attribute), 337
 name (kwcoco.CocoImage property), 391
 name_to_cat (kwcoco.coco_dataset.MixinCocoIndex property), 284
 name_to_cat (kwcoco.coco_sql_dataset.CocoSqlDatabase property), 347
 name_to_cat (kwcoco.CocoSqlDatabase property), 408
 names() (kwcoco.util.Archive method), 217
 names() (kwcoco.util.util_archive.Archive method), 201
 nesting() (kwcoco.util.delayed_ops.DelayedOperation method), 172
 next_id() (kwcoco._helpers._ID_Remapper method), 235
 normalize() (kwcoco.category_tree.CategoryTree method), 241
 normalize() (kwcoco.CategoryTree method), 369
 normalize() (kwcoco.ChannelSpec method), 372
 normalize() (kwcoco.coco_evaluator.CocoEvalConfig method), 300
 normalize() (kwcoco.FusedChannelSpec method), 412
 normalize() (kwcoco.SensorChanSpec method), 416
 NOT() (in module kwcoco.util), 226
 NOT() (in module kwcoco.util.jsonschema_elements), 199
 NOT() (kwcoco.util.jsonschema_elements.QuantifierElements method), 196
 NOT() (kwcoco.util.QuantifierElements method), 228
 NULL (kwcoco.util.jsonschema_elements.ScalarElements property), 195
 NULL (kwcoco.util.ScalarElements property), 228
 num_channels (kwcoco.coco_image.CocoImage property), 305
 num_channels (kwcoco.CocoImage property), 392
 num_channels (kwcoco.util.delayed_ops.DelayedImage property), 163
 num_classes (kwcoco.category_tree.CategoryTree property), 241
 num_classes (kwcoco.CategoryTree property), 368
 num_overviews (kwcoco.util.delayed_ops.DelayedChannelConcat property), 155
 num_overviews (kwcoco.util.delayed_ops.DelayedImage property), 163
 num_overviews (kwcoco.util.delayed_ops.DelayedOverview property), 176
 NUMBER (kwcoco.util.jsonschema_elements.ScalarElements property), 195
 NUMBER (kwcoco.util.ScalarElements property), 228
 numel() (kwcoco.ChannelSpec method), 375
 numel() (kwcoco.FusedChannelSpec method), 412

O

OBJECT() (*in module kwcoco.util*), 226
OBJECT() (*in module kwcoco.util.jsonschema_elements*), 199
OBJECT() (*kwcoco.util.ContainerElements method*), 218
OBJECT() (*kwcoco.util.jsonschema_elements.ContainerElements method*), 197
object_categories() (*kw-coco.coco_dataset.MixinCocoAccessors method*), 249
ObjectGroups (*class in kwcoco.coco_objects1d*), 325
ObjectList1D (*class in kwcoco.coco_objects1d*), 320
objs (*kwcoco.coco_objects1d.ObjectList1D property*), 321
ONEOF() (*in module kwcoco.util*), 227
ONEOF() (*in module kwcoco.util.jsonschema_elements*), 199
ONEOF() (*kwcoco.util.jsonschema_elements.QuantifierElements method*), 196
ONEOF() (*kwcoco.util.QuantifierElements method*), 228
OneVersusRestMeasureCombiner (*class in kw-coco.metrics.confusion_measures*), 89
OneVsRestConfusionVectors (*class in kw-coco.metrics.confusion_vectors*), 147
OneVsRestConfusionVectors (*class in kw-coco.metrics.confusion_vectors*), 95
optimize() (*kwcoco.util.delayed_ops.DelayedAsXarray method*), 152
optimize() (*kwcoco.util.delayed_ops.DelayedChannelCombiner method*), 153
optimize() (*kwcoco.util.delayed_ops.DelayedCrop method*), 158
optimize() (*kwcoco.util.delayed_ops.DelayedDequantize method*), 162
optimize() (*kwcoco.util.delayed_ops.DelayedImageLeaf method*), 167
optimize() (*kwcoco.util.delayed_ops.DelayedOperation method*), 175
optimize() (*kwcoco.util.delayed_ops.DelayedOverview method*), 176
optimize() (*kwcoco.util.delayed_ops.DelayedWarp method*), 180
orm_to_dict() (*in module kwcoco.coco_sql_dataset*), 339
ovr_classification_report() (*in module kw-coco.metrics.clf_report*), 78
ovr_classification_report() (*kw-coco.metrics.confusion_vectors.OneVsRestConfusionVectors method*), 96
ovr_classification_report() (*kw-coco.metrics.OneVsRestConfusionVectors method*), 148

P

pandas_table() (*kwcoco.coco_sql_dataset.CocoSqlDatabase method*), 347
pandas_table() (*kwcoco.CocoSqlDatabase method*), 408
parse() (*kwcoco.ChannelSpec method*), 371
parse() (*kwcoco.FusedChannelSpec class method*), 411
parse_quantity() (*in module kwcoco.coco_image*), 320
paths() (*kwcoco.demo.boids.Boids method*), 30
pct_summarize2() (*in module kw-coco.metrics.detect_metrics*), 109
peek() (*kwcoco.coco_objects1d.ObjectList1D method*), 321
PerClass_Measures (*class in kwcoco.metrics*), 148
PerClass_Measures (*class in kw-coco.metrics.confusion_measures*), 86
perturb_coco() (*in module kwcoco.demo.perturb*), 32
populate_from() (*kw-coco.coco_sql_dataset.CocoSqlDatabase method*), 345
populate_from() (*kwcoco.CocoSqlDatabase method*), 406
populate_info() (*in module kw-coco.metrics.confusion_measures*), 90
pred_detections() (*kw-coco.metrics.detect_metrics.DetectionMetrics method*), 101
pred_detections() (*kwcoco.metrics.DetectionMetrics method*), 133
prepare() (*kwcoco.util.delayed_ops.DelayedLoad method*), 171
prepare() (*kw-coco.util.delayed_ops.DelayedOperation method*), 174
primary_asset() (*kw-coco.coco_image.CocoImage method*), 305
primary_asset() (*kwcoco.CocoImage method*), 392
primary_image_filepath() (*kw-coco.coco_image.CocoImage method*), 305
primary_image_filepath() (*kwcoco.CocoImage method*), 392
print_graph() (*kw-coco.util.delayed_ops.DelayedOperation method*), 174
prob (*kwcoco.coco_sql_dataset.Annotation attribute*), 339
pycocotools_confusion_vectors() (*in module kw-coco.metrics.detect_metrics*), 109
Q

QuantifierElements (*class in kwcoco.util*), 227
QuantifierElements (*class in kw-coco.util.jsonschema_elements*), 196
query_subset() (*in module kwcoco.cli.coco_subset*), 20

| | |
|---|---|
| queue_size (<i>kwcoco.metrics.confusion_measures.MeasureCombinermethod</i>), 280 property), 89 | |
| R | |
| random() (<i>kwcoco.coco_dataset.MixinCocoExtras class method</i>), 254 | |
| random_category() (<i>kw- coco.demo.toypatterns.CategoryPatterns method</i>), 70 | |
| random_multi_object_path() (<i>in module coco.demo.toydata_video</i>), 65 | kw- |
| random_path() (<i>in module coco.demo.toydata_video</i>), 65 | kw- |
| random_single_video_dset() (<i>in module coco.demo.toydata</i>), 36 | kw- |
| random_single_video_dset() (<i>in module coco.demo.toydata_video</i>), 56 | kw- |
| random_video_dset() (<i>in module coco.demo.toydata</i>), 42 | kw- |
| random_video_dset() (<i>in module coco.demo.toydata_video</i>), 53 | kw- |
| Rasters (<i>class in kwcoco.demo.toypatterns</i>), 71 | |
| raw_table() (<i>kwcoco.coco_sql_dataset.CocoSqlDatabase method</i>), 348 | |
| raw_table() (<i>kwcoco.CocoSqlDatabase method</i>), 408 | |
| read() (<i>kwcoco.util.Archive method</i>), 217 | |
| read() (<i>kwcoco.util.util_archive.Archive method</i>), 201 | |
| reconstruct() (<i>kwcoco.metrics.confusion_measures.Measures method</i>), 80 | |
| reconstruct() (<i>kwcoco.metrics.Measures method</i>), 141 | |
| reflection_id (<i>kwcoco.coco_sql_dataset.KeypointCategory attribute</i>), 336 | |
| Reloadable (<i>class in kwcoco.util.util_monkey</i>), 209 | |
| remap() (<i>kwcoco._helpers._ID_Remapper method</i>), 235 | |
| remap() (<i>kwcoco._helpers.UniqueNameRemapper method</i>), 235 | |
| remove_annotation() (<i>kw- coco.coco_dataset.MixinCocoAddRemove method</i>), 277 | |
| remove_annotation_keypoints() (<i>kw- coco.coco_dataset.MixinCocoAddRemove method</i>), 280 | |
| remove_annotations() (<i>kw- coco.coco_dataset.MixinCocoAddRemove method</i>), 278 | |
| remove_categories() (<i>kw- coco.coco_dataset.MixinCocoAddRemove method</i>), 278 | |
| remove_images() (<i>kw- coco.coco_dataset.MixinCocoAddRemove method</i>), 279 | |
| remove_keypoint_categories() (<i>kw- coco.coco_dataset.MixinCocoAddRemove</i> (kw- coco.coco_dataset.MixinCocoAddRemove method), 279 | |
| remove_tracks() (<i>kw- coco.coco_dataset.MixinCocoAddRemove method</i>), 279 | (kw- coco.coco_dataset.MixinCocoAddRemove method), 279 |
| remove_videos() (<i>kw- coco.coco_dataset.MixinCocoAddRemove method</i>), 280 | (kw- coco.coco_dataset.MixinCocoAddRemove method), 280 |
| rename_categories() (<i>kw- coco.coco_dataset.MixinCocoExtras method</i>), 257 | (kw- coco.coco_dataset.MixinCocoExtras method), 257 |
| render_background() (<i>in module coco.demo.toydata_video</i>), 65 | kw- |
| render_category() (<i>kw- coco.demo.toypatterns.CategoryPatterns method</i>), 70 | (kw- coco.demo.toypatterns.CategoryPatterns method), 70 |
| render_foreground() (<i>in module coco.demo.toydata_video</i>), 65 | kw- |
| render_toy_dataset() (<i>in module coco.demo.toydata_video</i>), 61 | kw- |
| render_toy_image() (<i>in module coco.demo.toydata_video</i>), 63 | kw- |
| reroot() (<i>kwcoco.coco_dataset.MixinCocoExtras method</i>), 258 | |
| resize() (<i>kwcoco.util.delayed_ops.ImageOpsMixin method</i>), 187 | |
| resolution() (<i>kwcoco.coco_image.CocoImage method</i>), 315 | |
| resolution() (<i>kwcoco.CocoImage method</i>), 401 | |
| resolve_directory_symlinks() (<i>in module kw- coco.util</i>), 232 | |
| resolve_directory_symlinks() (<i>in module kw- coco.util.util_reroot</i>), 212 | |
| resolve_relative_to() (<i>in module kwcoco.util</i>), 233 | |
| resolve_relative_to() (<i>in module kw- coco.util.util_reroot</i>), 211 | |
| restricted_eval() (<i>in module kwcoco.util.util_eval</i>), 202 | |
| RestrictedSyntaxError, 202 | |
| reversible_diff() (<i>in module kw- coco.metrics.confusion_measures</i>), 86 | |
| rgb_to_cid() (<i>in module kwcoco.data.grab_camvid</i>), 25 | |
| S | |
| ScalarElements (<i>class in kwcoco.util</i>), 228 | |
| ScalarElements (<i>class in kw- coco.util.jsonschema_elements</i>), 195 | |
| scale() (<i>kwcoco.util.delayed_ops.ImageOpsMixin method</i>), 187 | |
| SchemaElements (<i>class in kwcoco.util</i>), 228 | |
| SchemaElements (<i>class in kw- coco.util.jsonschema_elements</i>), 197 | |
| score (<i>kwcoco.coco_sql_dataset.Annotation attribute</i>), 339 | |

score() (`kwcoco.metrics.voc_metrics.VOC_Metrics` method), 120
score_coco() (`kwcoco.metrics.detect_metrics.DetectionMetrics` method), 103
score_coco() (`kwcoco.metrics.DetectionMetrics` method), 135
score_kwant() (`kwcoco.metrics.detect_metrics.DetectionMetrics` method), 102
score_kwant() (`kwcoco.metrics.DetectionMetrics` method), 134
score_kwccoco() (`kwcoco.metrics.detect_metrics.DetectionMetrics` method), 102
score_kwccoco() (`kwcoco.metrics.DetectionMetrics` method), 134
score_pycocotools() (`kwcoco.metrics.detect_metrics.DetectionMetrics` method), 103
score_pycocotools() (`kwcoco.metrics.DetectionMetrics` method), 134
score_voc() (`kwcoco.metrics.detect_metrics.DetectionMetrics` method), 102
score_voc() (`kwcoco.metrics.DetectionMetrics` method), 134
segmentation (`kwcoco.coco_sql_dataset.Annotation` attribute), 338
send() (`kwcoco.util.IndexableWalker` method), 224
SensorChanSpec (class in `kwcoco`), 414
set() (`kwcoco.coco_objects1d.ObjectList1D` method), 323
set_annotation_category() (`kwcoco.coco_dataset.MixinCocoAddRemove` method), 281
setitem() (`kwcoco.util.dict_like.DictLike` method), 189
setitem() (`kwcoco.util.DictLike` method), 219
shape (`kwcoco.util.delayed_ops.DelayedArray` property), 151
shape (`kwcoco.util.delayed_ops.DelayedChannelConcat` property), 153
shape (`kwcoco.util.delayed_ops.DelayedConcat` property), 157
shape (`kwcoco.util.delayed_ops.DelayedImage` property), 163
shape (`kwcoco.util.delayed_ops.DelayedOperation` property), 174
shape (`kwcoco.util.delayed_ops.DelayedStack` property), 179
show() (`kwcoco.category_tree.CategoryTree` method), 241
show() (`kwcoco.CategoryTree` method), 369
show() (`kwcoco.coco_image.CocoImage` method), 316
show() (`kwcoco.CocoImage` method), 402
show_image() (`kwcoco.coco_dataset.MixinCocoDraw` method), 268
showAnns() (`kwcoco.compat_dataset.COCO` method), 353
shutdown() (`kwcoco.util.util_futures.Executor` method), 204
shutdown() (`kwcoco.util.util_futures.JobPool` method), 205
size() (`kwcoco.coco_objects1d.Images` property), 327
sizes() (`kwcoco.ChannelSpec` method), 375
sizes() (`kwcoco.FusedChannelSpec` method), 412
smart_truncate() (in module `kwcoco.util`), 234
smart_truncate() (in module `kwcoco.util.util_truncate`), 214
SortedSet (class in `kwcoco._helpers`), 235
SortedSetQuiet (in module `kwcoco._helpers`), 236
spec (`kwcoco.ChannelSpec` property), 371
spec (`kwcoco.FusedChannelSpec` property), 411
special_reroot_single() (in module `kwcoco.util`), 234
special_reroot_single() (in module `kwcoco.util.reroot`), 211
split() (`kwcoco.util.StratifiedGroupKFold` method), 230
split() (`kwcoco.util.util_sklearn.StratifiedGroupKFold` method), 213
SqlDictProxy (class in `kwcoco.coco_sql_dataset`), 339
SqlIdGroupDictProxy (class in `kwcoco.coco_sql_dataset`), 341
SqlListProxy (class in `kwcoco.coco_sql_dataset`), 339
star() (in module `kwcoco.demo.toypatterns`), 71
stats() (`kwcoco.coco_dataset.MixinCocoStats` method), 265
stats() (`kwcoco.coco_image.CocoImage` method), 305
stats() (`kwcoco.CocoImage` method), 392
step() (`kwcoco.demo.boids.Boids` method), 30
StratifiedGroupKFold (class in `kwcoco.util`), 229
StratifiedGroupKFold (class in `kwcoco.util.util_sklearn`), 212
streams() (`kwcoco.ChannelSpec` method), 375
streams() (`kwcoco.FusedChannelSpec` method), 414
streams() (`kwcoco.SensorChanSpec` method), 417
STRING (`kwcoco.util.jsonschema_elements.ScalarElements` property), 195
STRING (`kwcoco.util.ScalarElements` property), 228
submit() (`kwcoco.metrics.confusion_measures.MeasureCombiner` method), 89
submit() (`kwcoco.metrics.confusion_measures.OneVersusRestMeasureCombiner` method), 89
submit() (`kwcoco.util.util_futures.Executor` method), 203
submit() (`kwcoco.util.util_futures.JobPool` method), 205
subset() (`kwcoco.coco_dataset.CocoDataset` method), 295
subset() (`kwcoco.CocoDataset` method), 389

summarize() (*kwcoco.metrics.DetectionMetrics method*), 107
summarize() (*kwcoco.metrics.DetectionMetrics method*), 139
summary() (*kwcoco.metrics.confusion_measures.Measures method*), 80
summary() (*kwcoco.metrics.confusion_measures.PerClass_Measures method*), 86
summary() (*kwcoco.metrics.Measures method*), 141
summary() (*kwcoco.metrics.PerClass_Measures method*), 148
summary_plot() (*kwcoco.metrics.confusion_measures.Measures method*), 81
summary_plot() (*kwcoco.metrics.confusion_measures.PerClass_Measures method*), 86
summary_plot() (*kwcoco.metrics.Measures method*), 142
summary_plot() (*kwcoco.metrics.PerClass_Measures method*), 149
supercategory (*kwcoco.coco_objects1d.Categories property*), 326
supercategory (*kwcoco.coco_sql_dataset.Category attribute*), 336
supercategory (*kwcoco.coco_sql_dataset.KeypointCategory attribute*), 336
superstar() (*kwcoco.demo.toypatterns.Rasters static method*), 71
SupressPrint (*class in kwcoco.util.util_monkey*), 209

T

table_names() (*kwcoco.coco_sql_dataset.CocoSqlDatabase method*), 345
table_names() (*kwcoco.CocoSqlDatabase method*), 406
tabular_targets() (*kwcoco.coco_sql_dataset.CocoSqlDatabase method*), 349
tabular_targets() (*kwcoco.CocoSqlDatabase method*), 409
take() (*kwcoco.coco_objects1d.ObjectList1D method*), 321
take_channels() (*kwcoco.util.delayed_ops.DelayedChannelConcat method*), 153
take_channels() (*kwcoco.util.delayed_ops.DelayedImage method*), 163
throw() (*kwcoco.util.IndexableWalker method*), 224
timestamp (*kwcoco.coco_sql_dataset.Image attribute*), 337
to_coco() (*kwcoco.category_tree.CategoryTree method*), 240
to_coco() (*kwcoco.CategoryTree method*), 367
to_coco() (*kwcoco.kw18.KW18 method*), 356

to_dict() (*kwcoco.util.dict_like.DictLike method*), 190
to_dict() (*kwcoco.util.DictLike method*), 219
to_list() (*kwcoco.FusedChannelSpec method*), 413
to_oerset() (*kwcoco.FusedChannelSpec method*), 413
to_set() (*kwcoco.FusedChannelSpec method*), 413
Track (*class in kwcoco.coco_sql_dataset*), 338
track_id (*kwcoco.coco_sql_dataset.Annotation attribute*), 338
track_ids (*kwcoco.coco_objects1d.Tracks property*), 331
Tracks (*class in kwcoco.coco_objects1d*), 330
tracks() (*kwcoco.coco_dataset.MixinCocoObjects method*), 262
Trans_Measures (*kwcoco.util.delayed_ops.DelayedWarp property*), 180
triu_condense_multi_index() (*in module kwcoco.demo.boids*), 30
true_detections() (*kwcoco.metrics.detect_metrics.DetectionMetrics method*), 101
true_detections() (*kwcoco.metrics.DetectionMetrics method*), 133
TUPLE() (*in module kwcoco.coco_schema*), 334

U

unarchive_file() (*in module kwcoco.util*), 234
unarchive_file() (*in module kwcoco.util.util_archive*), 201
undo_warp() (*kwcoco.util.delayed_ops.DelayedImage method*), 165
undo_warps() (*kwcoco.util.delayed_ops.DelayedChannelConcat method*), 155
union() (*kwcoco.ChannelSpec method*), 374
union() (*kwcoco.coco_dataset.CocoDataset method*), 293
union() (*kwcoco.CocoDataset method*), 387
union() (*kwcoco.FusedChannelSpec method*), 414
unique() (*kwcoco.ChannelSpec method*), 375
unique() (*kwcoco.coco_objects1d.ObjectList1D method*), 321
unique() (*kwcoco.FusedChannelSpec method*), 411
UniqueNameRemapper (*class in kwcoco._helpers*), 235
update() (*kwcoco.util.dict_like.DictLike method*), 190
update() (*kwcoco.util.dict_proxy2.DictInterface method*), 191
update() (*kwcoco.util.DictLike method*), 220
update_neighbours() (*kwcoco.demo.boids.Boids method*), 30

V

valid_region() (*kwcoco.coco_image.CocoImage method*), 313
valid_region() (*kwcoco.CocoImage method*), 400

validate() (*kwcoco.coco_dataset.MixinCocoStats method*), 264
validate() (*kwcoco.util.Element method*), 221
validate() (*kwcoco.util.jsonschema_elements.Element method*), 195
values() (*kwcoco.ChannelSpec method*), 372
values() (*kwcoco.coco_sql_dataset.SqlDictProxy method*), 341
values() (*kwcoco.coco_sql_dataset.SqlIdGroupDictProxy method*), 343
values() (*kwcoco.util.dict_like.DictLike method*), 189
values() (*kwcoco.util.dict_proxy2.DictInterface method*), 191
values() (*kwcoco.util.DictLike method*), 219
Video (*class in kwcoco.coco_sql_dataset*), 336
video (*kwcoco.coco_image.CocoImage property*), 305
video (*kwcoco.CocoImage property*), 391
video_id (*kwcoco.coco_sql_dataset.Image attribute*), 337
Videos (*class in kwcoco.coco_objects1d*), 326
videos() (*kwcoco.coco_dataset.MixinCocoObjects method*), 262
view_sql() (*kwcoco.coco_dataset.CocoDataset method*), 296
view_sql() (*kwcoco.CocoDataset method*), 390
VOC_Metrics (*class in kwcoco.metrics.voc_metrics*), 120

W

warp() (*kwcoco.util.delayed_ops.ImageOpsMixin method*), 186
warp_img_from_vid (*kwcoco.coco_image.CocoImage property*), 314
warp_img_from_vid (*kwcoco.CocoImage property*), 400
warp_img_to_vid (*kwcoco.coco_sql_dataset.Image attribute*), 337
warp_vid_from_img (*kwcoco.coco_image.CocoImage property*), 313
warp_vid_from_img (*kwcoco.CocoImage property*), 400
weight (*kwcoco.coco_sql_dataset.Annotation attribute*), 339
width (*kwcoco.coco_objects1d.Images property*), 327
width (*kwcoco.coco_sql_dataset.Image attribute*), 337
width (*kwcoco.coco_sql_dataset.Video attribute*), 337
write_network_text() (*kwcoco.util.delayed_ops.DelayedOperation method*), 174

X

xywh (*kwcoco.coco_objects1d.Annots property*), 330